AIR CONDITIONERS

13ACX

MERIT® Series

R-410A

PRODUCT SPECIFICATIONS

Bulletin No. 210739
August 2015
Supersedes June 2015

MERIT® SERIES

SEER up to 16.00
1.5 to 5 Tons
Cooling Capacity - 18,000 to 59,000 Btuh

MODEL NUMBER IDENTIFICATION

13 AC X N - 024 - 230 - 17

Nominal SEER

Unit Type
AC = Air Conditioner

Refrigerant
X = R-410A

Regional Standards
– (dash) = All Regions or Southwest Region (dependent on size)
N = North Region

Nominal Cooling Capacity
018 = 1.5 tons
024 = 2 tons
030 = 2.5 tons
036 = 3 tons
042 = 3.5 tons
048 = 4 tons
060 = 5 tons

Voltage
230 = 208/230V-1phase-60hz

Minor Revision Number

FEATURES

CONTENTS

AHRI System Matches - All Regions 10
AHRI System Matches - North Region 51
Dimensions 7
Electrical Data 6
Features 2
Field Wiring 8
Installation Clearances 8
Model Number Identification 1
Optional Accessories 6
Sound Data 8
Specifications 6

WARRANTY

Compressor - limited warranty for five years in residential installations and five years in non-residential installations.

All other covered components - five years in residential installations and one year in non-residential installations.
Refer to Lennox Equipment Limited Warranty certificate included with unit for specific details.

APPROVALS

AHRI Certified to AHRI Standard 210/240-2008.

Sound rated in Lennox reverberant sound test room in Accordance with test conditions included in AHRI Standard 270-2008.

Tested in the Lennox Research Laboratory environmental test room.

Rated according to U.S. Department of Energy (DOE) test procedures.

Region specific models meet the minimum efficiency requirements for U.S DOE Federal Regional Standards in that area.

Units and components within bonded for grounding to meet safety standards for servicing required by UL, NEC and CEC.

Units are ETL certified for the U.S. and Canada.

ISO 9001 Registered Manufacturing Quality System.

For expanded ratings, see www.lennoxdavenet.com.

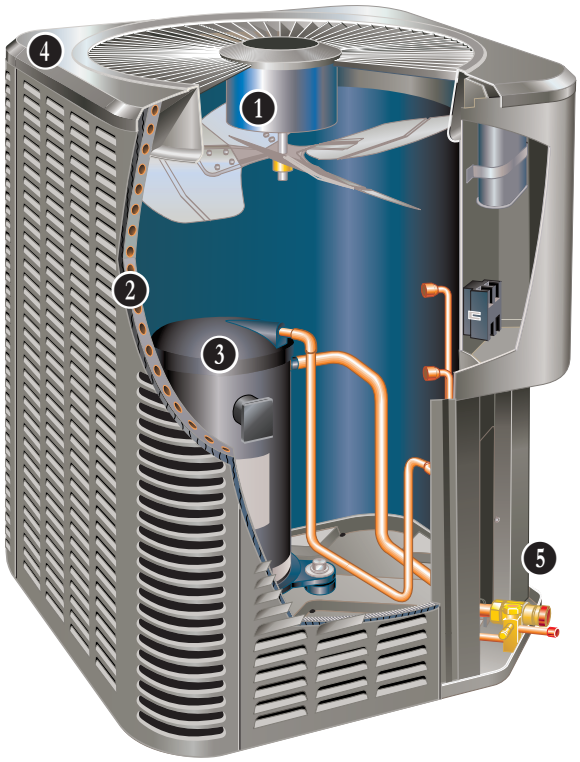

APPLICATIONS

SEER up to 16.00.

1.5 through 5 ton.

Single-phase power supply.

Sound levels as low as 76 dB.

Vertical air discharge allows concealment behind shrubs at grade level or out of sight on a roof.

Matching add-on furnace indoor coils or air handlers provide a wide range of cooling capacities and applications. See AHRI System Matches.

See Indoor Coils and Air Handlers sections for data.

Units shipped completely factory assembled, piped and wired. Each unit test operated at the factory ensuring proper operation.

Installer must set air conditioner, connect refrigerant lines and make electrical connections to complete job.

APPROVALS

AHRI Certified to AHRI Standard 210/240-2008.

Sound rated in Lennox reverberant sound test room in Accordance with test conditions included in AHRI Standard 270-2008.

Tested in the Lennox Research Laboratory environmental test room.

Rated According to U.S. Department of Energy (DOE) test procedures.

Units and components within bonded for grounding to meet safety standards for servicing required by UL, NEC and CEC.

Units are ETL certified for the U.S. and Canada.

ISO 9001 Registered Manufacturing Quality System.

For expanded ratings, see www.lennoxdavenet.com.

FEATURES

REFRIGERATION SYSTEM

R-410A Refrigerant

Non-chlorine, ozone friendly, R-410A.

Unit pre-charged with refrigerant.

See Specification table.

1 Condenser Fan

Direct drive fan moves large air volumes uniformly through entire condenser coil for high refrigerant cooling capacity.

Vertical air discharge minimizes operating sounds and eliminates damage to lawn and shrubs.

Fan motor has sleeve bearings and is inherently protected.

Motor totally enclosed for maximum protection from weather, dust and corrosion.

Rain shield on motor provides additional protection from moisture.

Louvered steel top fan guard furnished as standard.

Fan service access accomplished by removal of top panel.

2 Copper Tube/Enhanced Fin Coil

Lennox designed and fabricated coil.

Ripple-edged aluminum fins.

Copper tube construction.

Lanced fins provide maximum exposure of fin surface to air stream resulting in excellent heat transfer.

Fin collars grip tubing for maximum contact area.

Flared shoulder tubing connections/silver soldering construction.

Coil is factory tested under high pressure to ensure leakproof construction.

Steel louvered panels provide complete coil protection.

Panels can be completely removed for servicing.

Refrigerant Flow Control

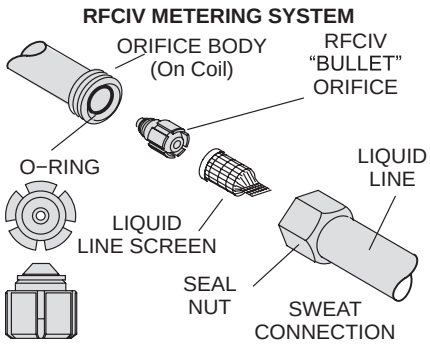

Units applicable to expansion valve systems or RFC systems when matched with specific indoor coils.

RFCIV:

Accurately meters refrigerant in system.

Refrigerant control is accomplished by exact sizing of refrigerant metering orifice.

The principle involves matching indoor coil with proper bore size of orifice in metering device.

Equalizes pressure shortly after compressor stops, unit starts unloaded, eliminating need for additional controls.

Furnished with air conditioner.

High Capacity Liquid Line Drier

Furnished with unit for field installation.

Approved for use with R-410A systems.

Traps any moisture or dirt that could contaminate the refrigerant system.

High Pressure Switch

Shuts off unit if abnormal operating conditions cause the discharge pressure to rise above setting.

Protects compressor from excessive condensing pressure.

Automatic reset.

Optional Accessories

Expansion Valve Kits

Must be ordered extra and field installed on certain indoor units. See TXV/Orifice Usage table.

Chatleff-style fittings.

Freezestat

Installs on or near the vapor line of the indoor coil or on the suction line.

Senses suction line temperature and cycles the compressor off when suction line temperature falls below it's setpoint.

Opens at 29°F and closes at 58°F.

Loss of Charge Switch Kit

Helps protect the compressor from damage due low refrigerant charge conditions.

SPST, normally-closed switch, automatic reset switch mounted on liquid line.

Refrigerant Line Kits

Refrigerant lines (suction & liquid) are shipped refrigeration clean. Lines are cleaned, dried, pressurized and sealed at factory.

Suction line fully insulated.

Lines are stubbed at both ends.

FEATURES

COMPRESSOR

3 Scroll Compressor

Compressor features high efficiency with uniform suction flow, constant discharge flow, high volumetric efficiency and quiet operation.

Compressor consists of two involute spiral scrolls matched together to generate a series of crescent shaped gas pockets between them.

During compression, one scroll remains stationary while the other scroll orbits around it.

Gas is drawn into the outer pocket, the pocket is sealed as the scroll rotates.

As the spiral movement continues, gas pockets are pushed to the center of the scrolls. Volume between the pockets is simultaneously reduced.

When the pocket reaches the center, gas is now at high pressure and is forced out of a port located in the center of the fixed scrolls.

During compression, several pockets are compressed simultaneously resulting in a smooth continuous compression cycle.

Continuous flank contact, maintained by centrifugal force, minimizes gas leakage and maximizes efficiency.

Scroll compressor is tolerant to the effects of slugging and contaminants. If this occurs, scrolls separate, allowing liquid or contaminants to to be worked toward the center and discharged.

Low gas pulses during compression reduces operational sound levels.

Compressor motor is internally protected from excessive current and temperature.

Compressor is installed in the unit on resilient rubber mounts for vibration free operation.

Optional Accessories

Compressor Crankcase Heater
Protects against refrigerant migration that can occur during low ambient operation.

Compressor Sound Cover
A reinforced vinyl compressor cover containing a 1-1/2 inch thick batt of fiberglass insulation.

All open edges are sealed with a one-inch wide hook and loop fastening tape.

CONTROLS

Optional Accessories

Compressor Hard Start Kit
Single-phase units are equipped with a PSC compressor motor. This type of motor normally doesn't need a potential relay and start capacitor.

In conditions such as low voltage, this kit may be required to increase the compressor starting torque.

Compressor Low Ambient Cut-Off Switch
Non-adjustable switch (low ambient cut-out) prevents compressor operation when outdoor temperature is below 35°F.

Compressor Time-Off Control
Kit prevents compressor short-cycling and allows time for suction and discharge pressure to equalize.

Permits compressor start-up in an unloaded condition.

Automatic reset with 5 minute delay between compressor shut-off and start-up.

Indoor Blower Off Delay Relay
Delays the indoor blower-off time during the cooling cycle.

See AHRI System Matches for usage.

Low Ambient Kit
Air conditioners operate satisfactorily in the cooling mode down to 45°F outdoor air temperature without any additional controls.

Kit can be added in the field enabling unit to operate properly down to 30°F in the cooling mode.

Crankcase heater and freezestat should be installed on compressors equipped with a Low Ambient Kit.

A compressor lock-out thermostat should be added to terminate compressor operation below recommended operation conditions.

Thermostat
Thermostat not furnished with unit. See Thermostat bulletins in Controls Section and Lennox Price Book.

Timed-Off Control
Kit prevents compressor short-cycling and allows time for suction and discharge pressure to equalize.

Permits compressor start-up in an unloaded condition.

Automatic reset with 5 minute delay between compressor shut-off and start-up.

FEATURES

CABINET

4 Heavy gauge steel cabinet with five station metal wash process.

Louvered heavy gauge steel panels surround unit on all four sides to prevent damage to the coil.

Powder paint finish provides superior rust and corrosion protection.

Control box is conveniently located with all controls factory wired.

Corner patch plate allows access to compressor components.

Drainage holes are provided in base section for moisture removal.

PermaGuard™ Unit Base
Durable zinc-coated base section resists rust and corrosion.

5 **Refrigerant Line Connections, Electrical Inlets, Service Valves**
Sweat connection suction and liquid lines are located on corner of unit cabinet.

Fully serviceable brass service valves prevent corrosion and provide access to refrigerant system. Suction valve can be fully shut off, while liquid valve may be front seated to manage refrigerant charge while servicing system.

Refrigerant line connections and field wiring inlets are located in one central area of cabinet for easy access. See dimension drawing.

Optional Accessories

Mounting Base
Provides permanent foundation for outdoor units.

High density polyethylene structural material is lightweight, sturdy, sound absorbing and will withstand the rigors of the sun, heat, cold, moisture, oil and refrigerant. Will not mildew or rot.

Can be shipped singly or in packages of 6 to a carton.

Unit Stand-Off Kit
Black high density polyethylene feet are available to raise unit off of mounting surface away from damaging moisture.

Four feet are furnished per order number.

SPECIFICATIONS

General Data	Model No.	All Regions	13ACX-018	13ACX-024	13ACX-030	13ACX-036	13ACX-042	13ACX-048	13ACX-060
		Northern Region	13ACXN018	13ACXN024	13ACXN030	13ACXN036	13ACXN042	13ACXN048	13ACXN060
		Nominal Tonnage	1.5	2	2.5	3	3.5	4	5
Connections (sweat)		Liquid line o.d. - in.	3/8	3/8	3/8	3/8	3/8	3/8	3/8
		Suction line o.d. - in.	5/8	5/8	3/4	3/4	3/4	7/8	7/8
[1] Refrigerant (R-410A) furnished			3 lbs. 15 oz.	3 lbs. 15 oz.	5 lbs. 2 oz.	5 lbs. 4 oz.	6 lbs. 8 oz.	7 lbs. 12 oz.	9 lbs. 0 oz.
RFCIV Metering Orifice Size			0.051	0.057	0.065	0.072	0.076	0.082	0.090
Outdoor Coil	Net face area sq. ft.	Outer coil	11.33	11.33	13.22	13.22	16.33	18.67	16.33
		Inner coil	- - -	- - -	- - -	- - -	- - -	- - -	15.71
		Tube diameter - in.	5/16	5/16	5/16	5/16	5/16	5/16	5/16
		Number of rows	1	1	1	1	1	1	2
		Fins per inch	26	26	26	26	26	26	22
Outdoor Fan		Diameter - in.	18	18	18	18	22	22	22
		Number of blades	3	3	4	4	4	4	4
		Motor hp	1/10	1/10	1/5	1/5	1/4	1/4	1/4
		Cfm	2350	2350	2400	2400	3500	3670	3600
		Rpm	1010	1010	1090	1090	825	835	830
		Watts	165	165	185	185	300	295	285
Shipping Data - lbs. 1 package			138	138	144	151	188	195	218

ELECTRICAL DATA

		Line voltage data - 60 hz - 1ph	208/230V	208/230V	208/230V	208/230V	208/230V	208/230V	208/230V
		[2] Maximum overcurrent protection (amps)	20	25	30	35	45	50	60
		[3] Minimum circuit ampacity	12.4	14.7	18.7	22.0	28.1	31.9	34.6
Compressor		Rated load amps	9.4	11.2	14.1	16.7	21.2	24.2	26.3
		Locked rotor amps	56.6	60.8	73	70	90	100	125
		Power factor	0.98	0.98	0.98	0.99	0.99	0.99	0.99
Condenser Fan Motor		Full load amps	0.7	0.7	1.1	1.1	1.7	1.7	1.7
		Locked rotor amps	1.3	1.3	2.0	2.0	3.2	3.2	3.2

OPTIONAL ACCESSORIES - ORDER SEPARATELY

Compressor Crankcase Heater		93M04	•	•	•	•			
		93M05					•	•	•
Compressor Hard Start Kit		10J42	•						
		88M91		•	•	•	•	•	•
Compressor Low Ambient Cut-Off Switch		45F08	•	•	•	•	•	•	•
Compressor Sound Cover		69J03	•	•	•	•	•	•	•
Compressor Time-Off Control		47J27	•	•	•	•	•	•	•
Freezestat	3/8 in. tubing	93G35	•	•	•	•	•	•	•
	5/8 in. tubing	50A93	•	•	•	•	•	•	•
Indoor Blower Off Delay Relay		58M81	•	•	•	•	•	•	•
Loss of Charge Switch Kit		84M23	•	•	•	•	•	•	•
[4] Low Ambient Kit (Fan Cycling)		34M72	•	•	•	•	•	•	•
Mounting Base		69J06	•	•	•	•			
		69J07					•	•	•
Refrigerant Line Sets	L15-26-20, L15-26-25, L15-26-35, L15-26-50		•	•					
	L15-41-20, L15-41-30, L15-41-40, L15-41-50				•	•	•		
	L15-65-30, L15-65-40, L15-65-50							•	•
Unit Stand-Off Kit		94J45	•	•	•	•	•	•	•

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.

[1] Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

[2] HACR type circuit breaker or fuse.

[3] Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

[4] Crankcase Heater and Freezestat are recommended with Low Ambient Kit.

DIMENSIONS - INCHES (MM)

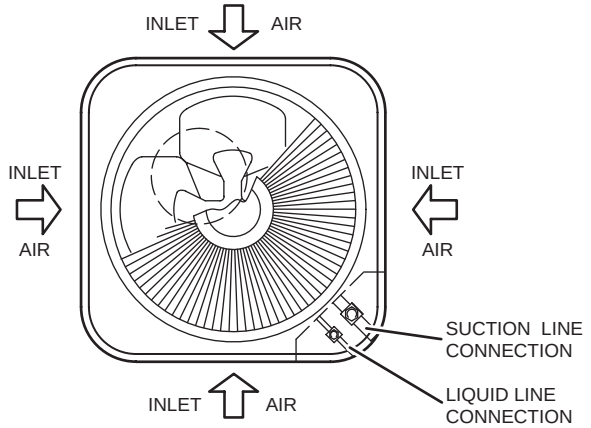

TOP VIEW

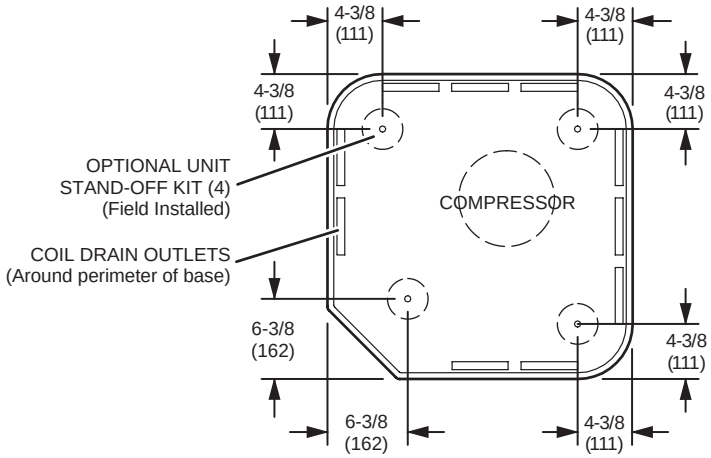

TOP VIEW BASE SECTION

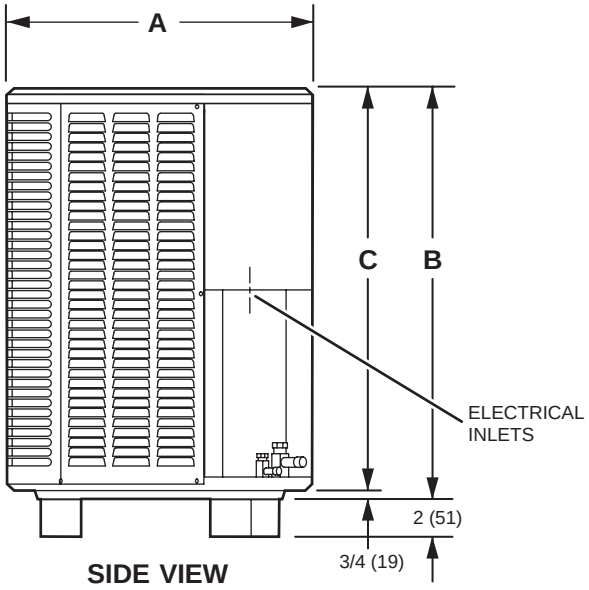

SIDE VIEW

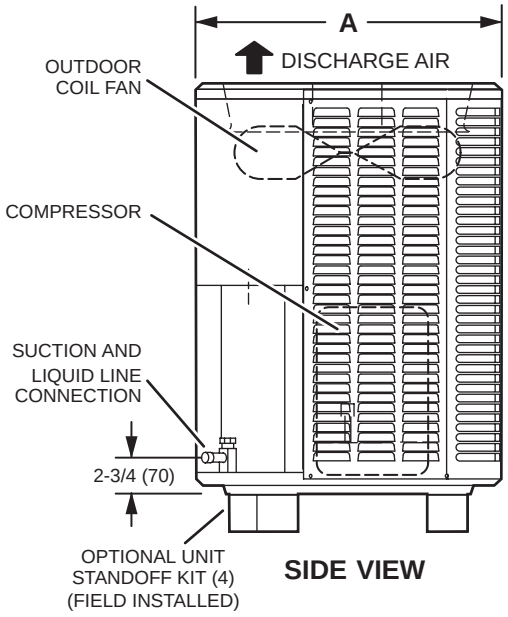

SIDE VIEW

Model	A		B		C	
	inches	mm	inches	mm	inches	mm
018	24-1/4	616	25-1/4	641	24-1/4	616
024	24-1/4	616	25-1/4	641	24-1/4	616
030	24-1/4	616	29-1/4	743	28-1/2	724
036	24-1/4	616	29-1/4	743	28-1/2	724
042	28-1/4	718	29-1/4	743	28-1/2	724
048	28-1/4	718	33-1/4	845	32-1/2	826
060	28-1/4	718	29-1/4	743	28-1/2	724

SOUND DATA

[1] Unit Model	Octave Band Linear Sound Power Levels dB, re 10^{-12} Watts Center Frequency - HZ							[1] Sound Rating Number (dB)
	125	250	500	1000	2000	4000	8000	
018	53	60	64.5	68.5	67	61.5	54.5	76
024	51.5	62	64.5	68.5	67	60.5	53.5	76
030	52.5	62	67.5	69	67	61.5	54.5	76
036	52.5	61	67	69	67	61.5	52.5	76
042	58	68	73.5	75.5	74	69.5	62.5	79
048	57.5	67	73	74.5	71	64	58.5	79
060	57	63	69.5	71.5	71	65.5	60.5	79

NOTE - the octave sound power data does not include tonal correction.

[1] Tested according to AHRI Standard 270-2008 test conditions.

FIELD WIRING

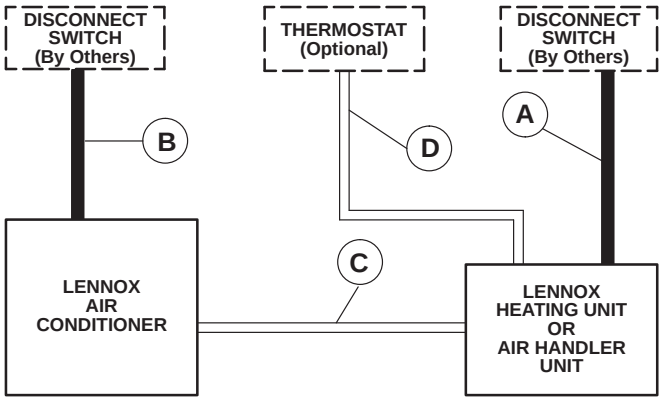

A - Two Wire Power

B - Two Wire Power (See Electrical Data)

C - Two Wire Low Voltage (18 ga. minimum)

D - Four Wire Low Voltage (Electro-Mechanical) 18 ga. minimum.
Five Wire Low Voltage (Electronic) 18 ga. minimum

NOTE - Field Wiring Not Furnished

All wiring must conform to NEC or CEC and local electrical codes.

INSTALLATION CLEARANCES - IN. (MM)

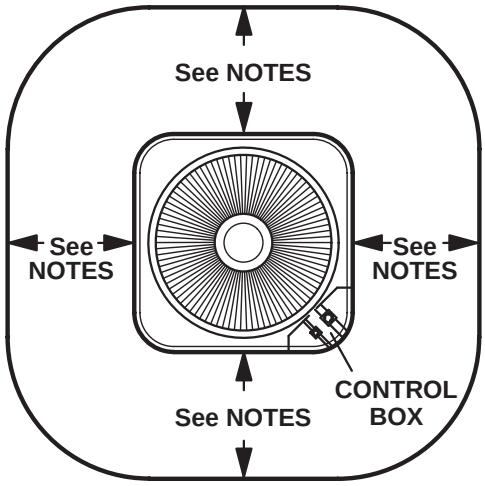

NOTES:

Service clearance of 30 in. (762 mm) must be maintained on one of the sides adjacent to the control box.

Clearance to one of the other three sides must be 36 in. (914 mm)

Clearance to one of the remaining two sides may be 12 in. (305 mm) and the final side may be 6 in. (152 mm).

A clearance of 24 in. must be maintained between two units.

48 in. (1219 mm) clearance required on top of unit.

TXV/ORIFICE USAGE

Use this table for C33, C35, CH23, CH33, CH35 and CR33 Field Installed TXV/Orifice Match-Ups.

Outdoor Unit Model No.	Refrigerant Metering Orifice (RFC)		Thermal Expansion Valve (TXV)
	Order No.	Orifice Size	
13ACX(-)(N)018	**10W93**	0.051	**12J18**
13ACX(-)(N)024	**97M75**	0.057	**12J18**
13ACX(-)(N)030	**10W99**	0.065	**12J18**
13ACX(-)(N)036	**98M13**	0.070	**12J19**
13ACX(-)(N)042	**97M78**	0.076	**12J20**
13ACX(-)(N)048	**97M79**	0.082	**12J20**
13ACX(-)(N)060	**10W89**	0.090	**12J20**

CX34 and CX35 upflow coils and all Lennox air handlers are shipped with a factory installed TXV. In most cases, no change out of the valve is needed.

If a change out is required it will be listed in the "TXV SUBSTITUTIONS" table. The correct TXV must be ordered separately and field installed.

C33, C35 and CH33 coils - Use the orifice shipped with the outdoor unit or replace the factory installed orifice with the expansion valve listed .

CR33 and CH23 coils - Use the orifice shipped with the outdoor unit or use the expansion valve listed.

CH35 coils - Factory installed orifice must be replaced with the expansion valve listed.

*TXV SUBSTITUTIONS

Use this table to determine if the factory installed TXV in the indoor unit needs to be replaced.

Outdoor Unit Model No.	Indoor Coil	Factory TXV	Replacement TXV
13ACXN042	CX35-30	**12J18**	**12J20**
13ACX(-)(N)030	CX34-42	**12J20**	**12J18**
13ACX(-)(N)030	CX34-43	**12J20**	**12J18**
13ACX(-)(N)030	CX34-44/48	**12J20**	**12J18**

*CX34 and CX35 coils - The factory installed expansion valve must be replaced with the expansion valve listed (ordered separately).
If the combination is not listed above, the factory installed TXV is used.

MOST POPULAR MATCHES

Outdoor Unit Model No.	Indoor Unit Model No
13ACX(-)(N)018	CX34-30
13ACX(-)(N)024	CX34-30
13ACX(-)(N)030	CX34-30
13ACX(-)(N)036	CX34-38
13ACX(-)(N)042	CX34-43
13ACX(-)(N)048	CX34-49
13ACX(-)(N)060	CX34-49

AHRI STANDARD 210/240

Cooling or heating capacities are net values, including the effects of blower motor heat, and do not include supplementary heat. Power input is the total power input to the compressor(s) and fan(s), plus any controls and other items required as part of the system for normal operation.

Units which do not have an indoor air-circulating blower furnished as part of the model, i.e., split system with indoor coil only, is established by subtracting from the total cooling capacity 1250 Btu/h per 1,000 cfm, and by adding the same amount to the heating capacity. Total power input for both heating and cooling is increased by 365 W per 1,000 cfm of indoor air circulated.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-018-230	RFC	18,600	13.00	11.00	C33-19		5548584
13ACX-018-230	RFC	18,800	13.00	11.00	C33-25		5548592
13ACX-018-230	RFC	18,400	13.00	11.00	C33-30		5548595
13ACX-018-230	RFC	19,000	13.00	11.00	C33-31		5548596
13ACX-018-230	RFC	18,500	13.00	11.00	CH33-19		5548608
13ACX-018-230	RFC	18,400	13.00	11.00	CH33-24/30		5548611
13ACX-018-230	RFC	18,900	13.00	11.50	CH33-25		5548614
13ACX-018-230	RFC	18,300	13.00	11.00	CR33-18		5548617
13ACX-018-230	RFC	18,000	13.00	11.00	CR33-24		5548619
13ACX-018-230	RFC	19,000	14.00	11.50	CR33-30/36		5548621
13ACX-018-230	TXV	18,600	13.00	11.00	C33-19		5549096
13ACX-018-230	TXV	19,200	15.00	12.50	C33-19	EL180UH045E36A	5733842
13ACX-018-230	TXV	19,200	15.00	12.50	C33-19	EL180UH045XE36A	5734125
13ACX-018-230	TXV	18,100	13.00	11.00	C33-24		5548589
13ACX-018-230	TXV	18,500	14.50	12.00	C33-24	EL180UH045E36A	5733843
13ACX-018-230	TXV	18,800	14.50	12.00	C33-24	EL180UH045XE36A	5734126
13ACX-018-230	TXV	18,800	13.00	11.00	C33-25		5549097
13ACX-018-230	TXV	19,400	15.00	13.00	C33-25	EL180UH045E36A	5733844
13ACX-018-230	TXV	19,400	15.00	13.00	C33-25	EL180UH045XE36A	5734127
13ACX-018-230	TXV	19,000	15.00	12.50	C33-30	EL180UH045E36A	5733845
13ACX-018-230	TXV	19,000	15.00	12.50	C33-30	EL180UH045XE36A	5734128
13ACX-018-230	TXV	19,000	13.00	11.00	C33-31		5550109
13ACX-018-230	TXV	19,500	15.00	13.00	C33-31	EL180UH045E36A	5733846
13ACX-018-230	TXV	19,500	15.00	13.00	C33-31	EL180UH045XE36A	5734129
13ACX-018-230	TXV	18,600	13.00	11.00	CBX25UH-018		5732776
13ACX-018-230	TXV	18,900	14.50	12.50	CBX25UHV-018		6970116
13ACX-018-230	TXV	19,300	15.00	13.00	CBX27UH-018		5548602
13ACX-018-230	TXV	19,300	15.00	13.00	CBX27UH-024		5548605
13ACX-018-230	TXV	18,800	13.00	11.00	CBX32M-018/024		5548606
13ACX-018-230	TXV	19,100	14.00	12.00	CBX32M-030		5548607
13ACX-018-230	TXV	18,500	13.00	11.00	CH33-19		5549098
13ACX-018-230	TXV	19,000	14.50	12.50	CH33-19	EL180UH045E36A	5733849
13ACX-018-230	TXV	19,000	15.00	12.50	CH33-19	EL180UH045XE36A	5734132
13ACX-018-230	TXV	18,400	13.00	11.00	CH33-24/30		5549099
13ACX-018-230	TXV	19,000	15.00	12.50	CH33-24/30	EL180UH045E36A	5733850
13ACX-018-230	TXV	19,000	15.00	12.50	CH33-24/30	EL180UH045XE36A	5734130
13ACX-018-230	TXV	19,400	15.00	12.50	CH33-25	EL180UH045E36A	5733847
13ACX-018-230	TXV	19,400	15.00	12.50	CH33-25	EL180UH045XE36A	5734131
13ACX-018-230	TXV	18,900	13.00	11.00	CH33-25B		5549100
13ACX-018-230	TXV	18,000	13.00	11.50	CH35-18A		7164141
13ACX-018-230	TXV	18,500	15.00	12.50	CH35-18A	EL180UH045E36A	7164142
13ACX-018-230	TXV	18,500	14.50	12.50	CH35-18A	EL180UH045XE36A	7164143
13ACX-018-230	TXV	18,500	14.50	12.50	CH35-18A	EL180UH045XE36B	7164144
13ACX-018-230	TXV	18,500	15.00	12.50	CH35-18A	EL195UH045XE36B	7164145
13ACX-018-230	TXV	18,500	15.00	12.50	CH35-18A	EL296UH045XE36B	7164146
13ACX-018-230	TXV	18,000	13.00	11.50	CH35-24A		7164147
13ACX-018-230	TXV	18,500	15.10	12.50	CH35-24A	EL180UH045E36A	7164148
13ACX-018-230	TXV	18,500	15.10	12.50	CH35-24A	EL180UH045XE36A	7164149
13ACX-018-230	TXV	18,000	13.00	11.50	CH35-24B		7164150

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-018-230	TXV	18,500	15.10	12.50	CH35-24B	EL195UH045E36B	7164151
13ACX-018-230	TXV	18,500	15.10	12.50	CH35-24B	EL296UH045XE36B	7164152
13ACX-018-230	TXV	18,300	13.00	11.00	CR33-18		5549101
13ACX-018-230	TXV	18,800	15.00	12.50	CR33-18	EL180DF045E36A	5733336
13ACX-018-230	TXV	18,000	13.00	11.00	CR33-24		5549381
13ACX-018-230	TXV	18,500	14.50	12.00	CR33-24	EL180DF045E36A	5733337
13ACX-018-230	TXV	19,000	13.00	11.00	CR33-30/36		5550110
13ACX-018-230	TXV	19,600	15.00	13.00	CR33-30/36	EL180DF045E36A	5733341
13ACX-018-230	TXV	18,100	13.00	11.00	CX34-18/24		5548625
13ACX-018-230	TXV	18,500	14.50	12.00	CX34-18/24	EL180UH045E36A	5733848
13ACX-018-230	TXV	18,500	14.50	12.00	CX34-18/24	EL180UH045XE36A	5734133
13ACX-018-230	TXV	18,600	13.00	11.00	CX34-19		5548628
13ACX-018-230	TXV	19,200	15.00	12.50	CX34-19	EL180UH045E36A	5733851
13ACX-018-230	TXV	19,200	15.00	12.50	CX34-19	EL180UH045XE36A	5734134
13ACX-018-230	TXV	18,800	13.00	11.00	CX34-25		5548631
13ACX-018-230	TXV	19,400	15.00	13.00	CX34-25	EL180UH045E36A	5733852
13ACX-018-230	TXV	19,400	15.00	13.00	CX34-25	EL180UH045XE36A	5734135
13ACX-018-230	TXV	18,400	13.00	11.00	CX34-30		5549092
13ACX-018-230	TXV	19,000	15.00	12.50	CX34-30	EL180UH045E36A	5733853
13ACX-018-230	TXV	19,000	15.00	12.50	CX34-30	EL180UH045XE36A	5734153
13ACX-018-230	TXV	19,000	13.00	11.00	CX34-31		5549095
13ACX-018-230	TXV	19,500	15.00	13.00	CX34-31	EL180UH045E36A	5733871
13ACX-018-230	TXV	19,500	15.00	13.00	CX34-31	EL180UH045XE36A	5734154
13ACX-024-230	RFC	23,400	13.00	11.00	C33-19		5549102
13ACX-024-230	RFC	23,600	13.50	11.00	C33-25		5549120
13ACX-024-230	RFC	23,200	13.00	11.00	C33-30		5549135
13ACX-024-230	RFC	24,000	13.50	11.50	C33-31		5549148
13ACX-024-230	RFC	23,600	13.50	11.00	C33-36		5549159
13ACX-024-230	RFC	24,200	14.00	11.50	C33-38		5549174
13ACX-024-230	RFC	23,400	13.00	11.00	CH33-19		5549213
13ACX-024-230	RFC	23,800	13.50	11.00	CH33-25		5549222
13ACX-024-230	RFC	24,200	14.00	11.50	CH33-31		5549235
13ACX-024-230	RFC	23,600	13.50	11.00	CH33-36		5549248
13ACX-024-230	RFC	22,800	13.00	10.50	CR33-24		5549263
13ACX-024-230	RFC	24,000	13.50	11.50	CR33-30/36		5549271
13ACX-024-230	TXV	23,400	13.00	11.00	C33-19		5549368
13ACX-024-230	TXV	24,000	15.00	12.00	C33-19	EL180UH045E36A	5733879
13ACX-024-230	TXV	24,000	15.00	12.00	C33-19	EL180UH045XE36A	5734162
13ACX-024-230	TXV	24,000	15.10	12.50	C33-19	SL280UH070V36A	5549105
13ACX-024-230	TXV	24,000	15.10	12.50	C33-19	SL280UH070XV36A	5549106
13ACX-024-230	TXV	23,200	14.00	11.50	C33-24	EL180UH045E36A	5733884
13ACX-024-230	TXV	23,200	14.00	11.50	C33-24	EL180UH045XE36A	5734167
13ACX-024-230	TXV	23,000	14.00	12.00	C33-24	EL180UH070E36B	5734558
13ACX-024-230	TXV	23,000	14.00	12.00	C33-24	EL180UH070XE36B	5734895
13ACX-024-230	TXV	23,000	14.00	12.00	C33-24	EL195UH045XE36B	5549111
13ACX-024-230	TXV	23,400	14.00	12.00	C33-24	EL195UH070XE36B	5549112
13ACX-024-230	TXV	23,000	14.00	12.00	C33-24	EL296UH045XE36B	5649112
13ACX-024-230	TXV	23,400	14.00	12.00	C33-24	EL296UH070XE36B	5649113
13ACX-024-230	TXV	23,400	14.00	12.00	C33-24	EL296UH070XV36B	5549113

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	23,400	14.50	12.00	C33-24	EL296UH090XV36C	5549118
13ACX-024-230	TXV	23,400	14.00	12.00	C33-24	SL280UH070V36A	5549109
13ACX-024-230	TXV	23,400	14.00	12.00	C33-24	SL280UH070XV36A	5549110
13ACX-024-230	TXV	23,400	14.25	12.00	C33-24	SL280UH090V36B	5549116
13ACX-024-230	TXV	23,400	14.00	12.00	C33-24	SLP98UH070XV36B	5549117
13ACX-024-230	TXV	23,200	14.50	12.00	C33-24	SLP98UH090XV36C	5549119
13ACX-024-230	TXV	23,600	13.50	11.00	C33-25		5549369
13ACX-024-230	TXV	24,400	15.50	12.50	C33-25	EL180UH045E36A	5733876
13ACX-024-230	TXV	24,400	15.50	12.50	C33-25	EL180UH045XE36A	5734159
13ACX-024-230	TXV	24,200	15.50	12.50	C33-25	EL180UH070E36B	5734554
13ACX-024-230	TXV	24,200	15.50	12.50	C33-25	EL180UH070XE36B	5734888
13ACX-024-230	TXV	24,000	15.00	12.50	C33-25	EL195UH045XE36B	5549125
13ACX-024-230	TXV	24,200	15.00	12.50	C33-25	EL195UH070XE36B	5549126
13ACX-024-230	TXV	24,000	15.00	12.50	C33-25	EL296UH045XE36B	5649100
13ACX-024-230	TXV	24,200	15.50	12.50	C33-25	EL296UH045XV36B	5549127
13ACX-024-230	TXV	24,200	15.00	12.50	C33-25	EL296UH070XE36B	5649101
13ACX-024-230	TXV	24,200	15.50	12.50	C33-25	EL296UH070XV36B	5549128
13ACX-024-230	TXV	24,200	15.00	12.50	C33-25	SL280UH070V36A	5549123
13ACX-024-230	TXV	24,200	15.00	12.50	C33-25	SL280UH070XV36A	5549124
13ACX-024-230	TXV	24,400	15.10	12.50	C33-25	SL280UH090V36B	5549131
13ACX-024-230	TXV	24,200	15.50	12.50	C33-25	SLP98UH070XV36B	5549132
13ACX-024-230	TXV	23,200	13.00	11.00	C33-30		5549370
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	EL180UH045E36A	5733873
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	EL180UH045XE36A	5734156
13ACX-024-230	TXV	23,600	14.50	12.00	C33-30	EL180UH070E36B	5734548
13ACX-024-230	TXV	23,600	14.50	12.00	C33-30	EL180UH070XE36B	5734889
13ACX-024-230	TXV	23,200	14.00	12.00	C33-30	EL195UH045XE36B	5549140
13ACX-024-230	TXV	23,600	14.50	12.00	C33-30	EL195UH070XE36B	5549141
13ACX-024-230	TXV	23,200	14.00	12.00	C33-30	EL296UH045XE36B	5649092
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	EL296UH045XV36B	5549142
13ACX-024-230	TXV	23,600	14.50	12.00	C33-30	EL296UH070XE36B	5649093
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	EL296UH070XV36B	5549143
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	EL296UH090XV36C	5549144
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	SL280UH070V36A	5549136
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	SL280UH070XV36A	5549137
13ACX-024-230	TXV	23,800	14.50	12.20	C33-30	SL280UH090V36B	5549138
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	SLP98UH070XV36B	5549139
13ACX-024-230	TXV	23,800	14.50	12.00	C33-30	SLP98UH090XV36C	5549145
13ACX-024-230	TXV	24,000	13.50	11.50	C33-31		5549371
13ACX-024-230	TXV	24,400	15.50	12.50	C33-31	EL180UH070E36B	5734549
13ACX-024-230	TXV	24,400	15.50	12.50	C33-31	EL180UH070XE36B	5734886
13ACX-024-230	TXV	24,200	15.00	12.50	C33-31	EL195UH045XE36B	5549155
13ACX-024-230	TXV	24,400	15.50	12.50	C33-31	EL195UH070XE36B	5549156
13ACX-024-230	TXV	24,200	15.00	12.50	C33-31	EL296UH045XE36B	5649094
13ACX-024-230	TXV	24,600	15.50	13.00	C33-31	EL296UH045XV36B	5549149
13ACX-024-230	TXV	24,400	15.50	12.50	C33-31	EL296UH070XE36B	5649095
13ACX-024-230	TXV	24,600	15.50	13.00	C33-31	EL296UH070XV36B	5549150
13ACX-024-230	TXV	24,800	15.10	13.00	C33-31	SL280UH070V36A	5549151
13ACX-024-230	TXV	24,800	15.10	13.00	C33-31	SL280UH070XV36A	5549152

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	24,600	15.50	12.50	C33-31	SLP98UH070XV36B	5549154
13ACX-024-230	TXV	23,600	13.50	11.00	C33-36		5549372
13ACX-024-230	TXV	24,400	15.00	12.50	C33-36	EL180UH045E36A	5733872
13ACX-024-230	TXV	24,400	15.00	12.50	C33-36	EL180UH045XE36A	5734155
13ACX-024-230	TXV	24,200	15.50	12.50	C33-36	EL180UH070E36B	5734550
13ACX-024-230	TXV	24,200	15.50	12.50	C33-36	EL180UH070XE36B	5734890
13ACX-024-230	TXV	23,800	15.00	12.00	C33-36	EL195UH045XE36B	5549167
13ACX-024-230	TXV	24,200	15.00	12.50	C33-36	EL195UH070XE36B	5549168
13ACX-024-230	TXV	23,800	15.00	12.00	C33-36	EL296UH045XE36B	5649090
13ACX-024-230	TXV	24,200	15.00	12.50	C33-36	EL296UH045XV36B	5549169
13ACX-024-230	TXV	24,200	15.00	12.50	C33-36	EL296UH070XE36B	5649091
13ACX-024-230	TXV	24,200	15.50	12.50	C33-36	EL296UH070XV36B	5549170
13ACX-024-230	TXV	24,200	15.00	12.50	C33-36	EL296UH090XV36C	5549173
13ACX-024-230	TXV	24,400	15.10	12.50	C33-36	SL280UH070V36A	5549165
13ACX-024-230	TXV	24,400	15.10	12.50	C33-36	SL280UH070XV36A	5549166
13ACX-024-230	TXV	24,400	15.10	12.50	C33-36	SL280UH090V36B	5549160
13ACX-024-230	TXV	24,200	15.50	12.50	C33-36	SLP98UH070XV36B	5549161
13ACX-024-230	TXV	24,200	15.50	12.50	C33-36	SLP98UH090XV36C	5549162
13ACX-024-230	TXV	24,200	14.00	11.50	C33-38		5549373
13ACX-024-230	TXV	24,400	15.50	12.50	C33-38	EL180UH045E36A	5733874
13ACX-024-230	TXV	24,400	15.50	12.50	C33-38	EL180UH045XE36A	5734157
13ACX-024-230	TXV	24,800	15.50	12.50	C33-38	EL180UH070E36B	5734553
13ACX-024-230	TXV	24,800	16.00	13.00	C33-38	EL180UH070XE36B	5734887
13ACX-024-230	TXV	24,600	15.50	12.50	C33-38	EL195UH045XE36B	5549179
13ACX-024-230	TXV	24,600	15.50	13.00	C33-38	EL195UH070XE36B	5549180
13ACX-024-230	TXV	24,600	15.50	12.50	C33-38	EL296UH045XE36B	5649096
13ACX-024-230	TXV	24,800	15.50	12.50	C33-38	EL296UH045XV36B	5549181
13ACX-024-230	TXV	24,600	15.50	13.00	C33-38	EL296UH070XE36B	5649097
13ACX-024-230	TXV	24,800	15.50	12.50	C33-38	EL296UH070XV36B	5549182
13ACX-024-230	TXV	25,000	15.50	12.50	C33-38	SL280UH070V36A	5549177
13ACX-024-230	TXV	25,000	15.50	12.50	C33-38	SL280UH070XV36A	5549178
13ACX-024-230	TXV	25,000	15.50	12.50	C33-38	SL280UH090V36B	5549185
13ACX-024-230	TXV	24,800	15.50	12.50	C33-38	SLP98UH070XV36B	5549186
13ACX-024-230	TXV	23,600	13.00	11.00	CBX25UH-024		5732777
13ACX-024-230	TXV	23,800	13.00	11.00	CBX25UH-030		6468624
13ACX-024-230	TXV	24,000	15.00	12.50	CBX25UHV-024		6970117
13ACX-024-230	TXV	24,400	15.50	12.50	CBX27UH-024		5549190
13ACX-024-230	TXV	24,600	15.50	12.50	CBX27UH-030		5549191
13ACX-024-230	TXV	23,600	13.50	11.50	CBX32M-018/024		5549192
13ACX-024-230	TXV	24,200	14.50	12.00	CBX32M-030		5549193
13ACX-024-230	TXV	24,600	14.50	12.00	CBX32M-036		5549194
13ACX-024-230	TXV	23,800	14.00	11.50	CBX32MV-018/024		5549195
13ACX-024-230	TXV	24,000	14.50	12.00	CBX32MV-024/030		5549196
13ACX-024-230	TXV	24,600	15.00	12.50	CBX32MV-036		5549197
13ACX-024-230	TXV	24,400	15.00	12.00	CBX40UHV-024		5549198
13ACX-024-230	TXV	24,200	15.00	12.00	CBX40UHV-030		5549199
13ACX-024-230	TXV	24,600	15.00	12.50	CBX40UHV-036		5549200
13ACX-024-230	TXV	23,600	13.50	11.00	CH23-41		5549374
13ACX-024-230	TXV	23,600	13.50	11.00	CH23-41		5549668

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	24,200	15.50	12.50	CH23-41	EL180UH045E36A	5733875
13ACX-024-230	TXV	24,200	15.50	12.50	CH23-41	EL180UH045XE36A	5734158
13ACX-024-230	TXV	24,600	15.50	13.00	CH23-41	EL180UH070E36B	5734551
13ACX-024-230	TXV	24,600	15.50	13.00	CH23-41	EL180UH070XE36B	5734891
13ACX-024-230	TXV	24,000	15.00	12.50	CH23-41	EL195UH045XE36B	5549201
13ACX-024-230	TXV	24,200	15.50	12.50	CH23-41	EL195UH070XE36B	5549202
13ACX-024-230	TXV	24,000	15.00	12.50	CH23-41	EL296UH045XE36B	5649098
13ACX-024-230	TXV	24,200	15.00	12.50	CH23-41	EL296UH045XV36B	5549203
13ACX-024-230	TXV	24,200	15.50	12.50	CH23-41	EL296UH070XE36B	5649099
13ACX-024-230	TXV	24,200	15.50	12.50	CH23-41	EL296UH070XV36B	5549204
13ACX-024-230	TXV	24,400	15.10	12.50	CH23-41	SL280UH070V36A	5549209
13ACX-024-230	TXV	24,400	15.10	12.50	CH23-41	SL280UH070XV36A	5549210
13ACX-024-230	TXV	24,400	15.10	12.50	CH23-41	SL280UH090V36B	5549211
13ACX-024-230	TXV	24,200	15.50	12.50	CH23-41	SLP98UH070XV36B	5549212
13ACX-024-230	TXV	23,400	13.00	11.00	CH33-19		5549375
13ACX-024-230	TXV	24,000	15.00	12.00	CH33-19	EL180UH045E36A	5733877
13ACX-024-230	TXV	24,000	15.00	12.00	CH33-19	EL180UH045XE36A	5734160
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-19	SL280UH070V36A	5549216
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-19	SL280UH070XV36A	5549217
13ACX-024-230	TXV	23,800	14.50	12.00	CH33-24/30	EL180UH045E36A	5733878
13ACX-024-230	TXV	23,800	14.50	12.00	CH33-24/30	EL180UH045XE36A	5734161
13ACX-024-230	TXV	23,800	14.50	12.00	CH33-24/30	SL280UH070V36A	5549220
13ACX-024-230	TXV	23,800	14.50	12.00	CH33-24/30	SL280UH070XV36A	5549221
13ACX-024-230	TXV	23,800	13.50	11.00	CH33-25		5549376
13ACX-024-230	TXV	24,200	15.50	12.50	CH33-25	EL296UH045XV36B	5549229
13ACX-024-230	TXV	24,200	15.50	12.50	CH33-25	EL296UH070XV36B	5549230
13ACX-024-230	TXV	24,400	15.10	12.50	CH33-25	SL280UH070V36A	5549225
13ACX-024-230	TXV	24,400	15.10	12.50	CH33-25	SL280UH070XV36A	5549226
13ACX-024-230	TXV	24,400	15.10	12.50	CH33-25	SL280UH090V36B	5549233
13ACX-024-230	TXV	24,200	15.50	12.50	CH33-25	SLP98UH070XV36B	5549234
13ACX-024-230	TXV	24,400	15.00	12.50	CH33-25A	EL180UH045E36A	5733880
13ACX-024-230	TXV	24,400	15.00	12.50	CH33-25A	EL180UH045XE36A	5734163
13ACX-024-230	TXV	24,400	15.50	12.50	CH33-25B	EL180UH070E36B	5734555
13ACX-024-230	TXV	24,400	15.50	12.50	CH33-25B	EL180UH070XE36B	5734892
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-25B	EL195UH045XE36B	5549227
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-25B	EL195UH070XE36B	5549228
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-25B	EL296UH045XE36B	5649102
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-25B	EL296UH070XE36B	5649103
13ACX-024-230	TXV	24,200	14.00	11.50	CH33-31		5549377
13ACX-024-230	TXV	24,800	15.50	12.50	CH33-31	EL296UH045XV36B	5549242
13ACX-024-230	TXV	24,800	15.50	12.50	CH33-31	EL296UH070XV36B	5549243
13ACX-024-230	TXV	24,800	15.10	12.50	CH33-31	SL280UH070V36A	5549238
13ACX-024-230	TXV	24,800	15.10	12.50	CH33-31	SL280UH070XV36A	5549239
13ACX-024-230	TXV	25,000	15.50	12.50	CH33-31	SL280UH090V36B	5549246
13ACX-024-230	TXV	24,800	15.50	12.50	CH33-31	SLP98UH070XV36B	5549247
13ACX-024-230	TXV	24,800	15.50	12.50	CH33-31A	EL180UH045E36A	5733881
13ACX-024-230	TXV	24,800	15.50	12.50	CH33-31A	EL180UH045XE36A	5734164
13ACX-024-230	TXV	24,800	15.50	12.50	CH33-31B	EL180UH070E36B	5734556
13ACX-024-230	TXV	24,800	15.50	12.50	CH33-31B	EL180UH070XE36B	5734893

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	24,600	15.50	12.50	CH33-31B	EL195UH045XE36B	5549240
13ACX-024-230	TXV	24,600	15.50	13.00	CH33-31B	EL195UH070XE36B	5549241
13ACX-024-230	TXV	24,600	15.50	12.50	CH33-31B	EL296UH045XE36B	5649104
13ACX-024-230	TXV	24,600	15.50	13.00	CH33-31B	EL296UH070XE36B	5649105
13ACX-024-230	TXV	23,600	13.50	11.00	CH33-36		5549378
13ACX-024-230	TXV	24,200	15.00	12.50	CH33-36	EL296UH045XV36B	5549255
13ACX-024-230	TXV	24,200	15.50	12.50	CH33-36	EL296UH070XV36B	5549256
13ACX-024-230	TXV	24,400	15.50	13.00	CH33-36	EL296UH090XV36C	5549262
13ACX-024-230	TXV	24,200	15.00	12.20	CH33-36	SL280UH070V36A	5549251
13ACX-024-230	TXV	24,200	15.00	12.20	CH33-36	SL280UH070XV36A	5549252
13ACX-024-230	TXV	24,400	15.10	12.50	CH33-36	SL280UH090V36B	5549259
13ACX-024-230	TXV	24,200	15.50	12.50	CH33-36	SLP98UH070XV36B	5549260
13ACX-024-230	TXV	24,400	15.50	13.00	CH33-36	SLP98UH090XV36C	5549261
13ACX-024-230	TXV	24,200	15.00	12.50	CH33-36A	EL180UH045E36A	5733882
13ACX-024-230	TXV	24,200	15.00	12.50	CH33-36A	EL180UH045XE36A	5734165
13ACX-024-230	TXV	24,200	15.50	12.50	CH33-36B	EL180UH070E36B	5734557
13ACX-024-230	TXV	24,200	15.50	12.50	CH33-36B	EL180UH070XE36B	5734894
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-36B	EL195UH045XE36B	5549253
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-36B	EL195UH070XE36B	5549254
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-36B	EL296UH045XE36B	5649106
13ACX-024-230	TXV	24,000	15.00	12.50	CH33-36B	EL296UH070XE36B	5649107
13ACX-024-230	TXV	23,400	13.00	11.00	CH35-18A		7164153
13ACX-024-230	TXV	24,000	15.00	12.50	CH35-18A	EL180UH045E36A	7164154
13ACX-024-230	TXV	24,000	15.00	12.50	CH35-18A	EL180UH045XE36A	7164155
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-18A	SL280UH070V36A	7164156
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-18A	SL280UH070XV36A	7164157
13ACX-024-230	TXV	23,800	13.00	11.00	CH35-24A		7164158
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24A	EL180UH045E36A	7164160
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24A	EL180UH045XE36A	7164161
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24A	SL280UH070V36A	7164162
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24A	SL280UH070XV36A	7164163
13ACX-024-230	TXV	23,800	13.00	11.00	CH35-24B		7164159
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-24B	EL180UH070E36B	7164164
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-24B	EL180UH070XE36B	7164165
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24B	EL195UH045XE36B	7164166
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24B	EL195UH070XE36B	7164167
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24B	EL296UH045XE36B	7164169
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-24B	EL296UH045XV36B	7164168
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24B	EL296UH070XE36B	7164171
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-24B	EL296UH070XV36B	7164170
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-24B	SL280UH090V36B	7164172
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-24B	SLP98UH070XV36B	7164173
13ACX-024-230	TXV	24,000	13.00	11.00	CH35-30A		7167602
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30A	EL180UH045E36A	7164174
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30A	EL180UH045XE36A	7164175
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-30A	SL280UH070V36A	7164176
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-30A	SL280UH070XV36A	7164177
13ACX-024-230	TXV	24,000	13.00	11.00	CH35-30B		7167604
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	EL180UH070E36B	7164178

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	EL180UH070XE36B	7164179
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	EL195UH045XE36B	7164180
13ACX-024-230	TXV	24,000	15.50	13.00	CH35-30B	EL195UH070XE36B	7164181
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	EL296UH045XE36B	7164183
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	EL296UH045XV36B	7164182
13ACX-024-230	TXV	24,000	15.50	13.00	CH35-30B	EL296UH070XE36B	7164185
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	EL296UH070XV36B	7164184
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	SL280UH090V36B	7164186
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-30B	SLP98UH070XV36B	7164187
13ACX-024-230	TXV	23,600	13.00	11.00	CH35-36A		7164188
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36A	EL180UH045E36A	7164191
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36A	EL180UH045XE36A	7164192
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36A	SL280UH070V36A	7164193
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36A	SL280UH070XV36A	7164194
13ACX-024-230	TXV	23,600	13.00	11.00	CH35-36B		7164189
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-36B	EL180UH070E36B	7164195
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-36B	EL180UH070XE36B	7164196
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36B	EL195UH045XE36B	7164197
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36B	EL195UH070XE36B	7164198
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36B	EL296UH045XE36B	7164200
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36B	EL296UH045XV36B	7164199
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36B	EL296UH070XE36B	7164202
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-36B	EL296UH070XV36B	7164201
13ACX-024-230	TXV	24,000	15.10	12.50	CH35-36B	SL280UH090V36B	7164203
13ACX-024-230	TXV	24,000	15.50	12.50	CH35-36B	SLP98UH070XV36B	7164204
13ACX-024-230	TXV	24,000	15.50	13.00	CH35-36B	SLP98UH070XV36C	7164562
13ACX-024-230	TXV	23,800	13.00	11.00	CH35-36C		7164190
13ACX-024-230	TXV	24,000	15.50	13.00	CH35-36C	EL296UH090XV36C	7164205
13ACX-024-230	TXV	22,800	13.00	10.50	CR33-24		5549379
13ACX-024-230	TXV	23,200	14.00	11.50	CR33-24	EL180DF045E36A	5733348
13ACX-024-230	TXV	22,800	14.00	11.50	CR33-24	EL180DF070E36B	5733435
13ACX-024-230	TXV	22,800	14.00	11.50	CR33-24	EL195DF045XE36B	5549266
13ACX-024-230	TXV	22,800	14.00	11.50	CR33-24	EL195DF070XE48B	5549267
13ACX-024-230	TXV	23,400	14.00	12.00	CR33-24	EL296DF045V36B	5549268
13ACX-024-230	TXV	22,800	14.00	11.50	CR33-24	EL296DF045XE36B	5649108
13ACX-024-230	TXV	23,400	14.00	12.00	CR33-24	EL296DF045XV36B	7505724
13ACX-024-230	TXV	22,800	14.00	11.50	CR33-24	EL296DF070XE48B	5649109
13ACX-024-230	TXV	23,200	14.25	11.70	CR33-24	SL280DF070V36A	5549265
13ACX-024-230	TXV	23,400	14.50	12.00	CR33-24	SLP98DF070XV36B	5549270
13ACX-024-230	TXV	24,000	13.50	11.50	CR33-30/36		5549380
13ACX-024-230	TXV	24,200	15.50	12.50	CR33-30/36	EL180DF045E36A	5733350
13ACX-024-230	TXV	24,600	15.50	13.00	CR33-30/36	EL180DF070E36B	5733437
13ACX-024-230	TXV	24,200	15.00	12.50	CR33-30/36	EL195DF045XE36B	5549274
13ACX-024-230	TXV	24,400	15.50	12.50	CR33-30/36	EL195DF070XE48B	5549275
13ACX-024-230	TXV	24,600	15.50	12.50	CR33-30/36	EL296DF045V36B	5549276
13ACX-024-230	TXV	24,200	15.00	12.50	CR33-30/36	EL296DF045XE36B	5649110
13ACX-024-230	TXV	24,600	15.50	12.50	CR33-30/36	EL296DF045XV36B	7505725
13ACX-024-230	TXV	24,600	15.00	12.50	CR33-30/36	EL296DF070V48B	5549277
13ACX-024-230	TXV	24,400	15.50	12.50	CR33-30/36	EL296DF070XE48B	5649111

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	24,600	15.00	12.50	CR33-30/36	EL296DF070XV48B	7505707
13ACX-024-230	TXV	24,400	15.00	12.50	CR33-30/36	SL280DF070V36A	5549273
13ACX-024-230	TXV	24,800	15.10	12.50	CR33-30/36	SL280DF090V48B	5549279
13ACX-024-230	TXV	24,600	15.50	12.50	CR33-30/36	SLP98DF070XV36B	5549280
13ACX-024-230	TXV	24,600	15.50	13.00	CR33-30/36	SLP98DF090XV36C	5549281
13ACX-024-230	TXV	23,200	14.00	11.50	CX34-18/24	EL180UH045E36A	5733883
13ACX-024-230	TXV	23,200	14.00	11.50	CX34-18/24	EL180UH045XE36A	5734166
13ACX-024-230	TXV	23,000	14.00	12.00	CX34-18/24	EL180UH070E36B	5734559
13ACX-024-230	TXV	23,000	14.00	12.00	CX34-18/24	EL180UH070XE36B	5734896
13ACX-024-230	TXV	23,000	14.00	12.00	CX34-18/24	EL195UH045XE36B	5549292
13ACX-024-230	TXV	23,400	14.00	12.00	CX34-18/24	EL195UH070XE36B	5549293
13ACX-024-230	TXV	23,000	14.00	12.00	CX34-18/24	EL296UH045XE36B	5649114
13ACX-024-230	TXV	23,200	14.00	12.00	CX34-18/24	EL296UH045XV36B	5549284
13ACX-024-230	TXV	23,400	14.00	12.00	CX34-18/24	EL296UH070XE36B	5649115
13ACX-024-230	TXV	23,400	14.00	12.00	CX34-18/24	EL296UH070XV36B	5549286
13ACX-024-230	TXV	23,400	14.50	12.00	CX34-18/24	EL296UH090XV36C	5549285
13ACX-024-230	TXV	23,400	14.00	12.00	CX34-18/24	SL280UH070V36A	5549287
13ACX-024-230	TXV	23,400	14.00	12.00	CX34-18/24	SL280UH070XV36A	5549288
13ACX-024-230	TXV	23,400	14.25	12.00	CX34-18/24	SL280UH090V36B	5549289
13ACX-024-230	TXV	23,400	14.00	12.00	CX34-18/24	SLP98UH070XV36B	5549290
13ACX-024-230	TXV	23,200	14.50	12.00	CX34-18/24	SLP98UH090XV36C	5549291
13ACX-024-230	TXV	23,400	13.00	11.00	CX34-19		5549296
13ACX-024-230	TXV	24,000	15.00	12.00	CX34-19	EL180UH045E36A	5733885
13ACX-024-230	TXV	24,000	15.00	12.00	CX34-19	EL180UH045XE36A	5734168
13ACX-024-230	TXV	24,000	15.10	12.50	CX34-19	SL280UH070V36A	5549299
13ACX-024-230	TXV	24,000	15.10	12.50	CX34-19	SL280UH070XV36A	5549300
13ACX-024-230	TXV	23,600	13.50	11.00	CX34-25		5549301
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-25	EL180UH045E36A	5733886
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-25	EL180UH045XE36A	5734169
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-25	EL180UH070E36B	5734560
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-25	EL180UH070XE36B	5734897
13ACX-024-230	TXV	24,000	15.00	12.50	CX34-25	EL195UH045XE36B	5549306
13ACX-024-230	TXV	24,200	15.00	12.50	CX34-25	EL195UH070XE36B	5549307
13ACX-024-230	TXV	24,000	15.00	12.50	CX34-25	EL296UH045XE36B	5649116
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-25	EL296UH045XV36B	5549308
13ACX-024-230	TXV	24,200	15.00	12.50	CX34-25	EL296UH070XE36B	5649117
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-25	EL296UH070XV36B	5549309
13ACX-024-230	TXV	24,400	15.10	12.50	CX34-25	SL280UH070V36A	5549304
13ACX-024-230	TXV	24,200	15.00	12.50	CX34-25	SL280UH070XV36A	5549305
13ACX-024-230	TXV	24,400	15.10	12.50	CX34-25	SL280UH090V36B	5549312
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-25	SLP98UH070XV36B	5549313
13ACX-024-230	TXV	23,200	13.00	11.00	CX34-30		5549316
13ACX-024-230	TXV	23,800	15.50	12.50	CX34-30	EL180UH045E36A	5733887
13ACX-024-230	TXV	23,800	14.50	12.00	CX34-30	EL180UH045XE36A	5734170
13ACX-024-230	TXV	23,600	14.50	12.00	CX34-30	EL180UH070E36B	5734561
13ACX-024-230	TXV	23,600	14.50	12.00	CX34-30	EL180UH070XE36B	5734898
13ACX-024-230	TXV	23,200	14.00	12.00	CX34-30	EL195UH045XE36B	5549324
13ACX-024-230	TXV	23,600	14.50	12.00	CX34-30	EL195UH070XE36B	5549325
13ACX-024-230	TXV	23,200	14.00	12.00	CX34-30	EL296UH045XE36B	5649118

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	23,800	14.50	12.00	CX34-30	EL296UH045XV36B	5549317
13ACX-024-230	TXV	23,600	14.50	12.00	CX34-30	EL296UH070XE36B	5649119
13ACX-024-230	TXV	23,800	14.50	12.00	CX34-30	EL296UH070XV36B	5549318
13ACX-024-230	TXV	23,800	14.50	12.00	CX34-30	EL296UH090XV36C	5549328
13ACX-024-230	TXV	23,800	14.50	12.00	CX34-30	SL280UH070V36A	5549319
13ACX-024-230	TXV	23,800	14.50	12.00	CX34-30	SL280UH070XV36A	5549320
13ACX-024-230	TXV	23,800	14.50	12.20	CX34-30	SL280UH090V36B	5549321
13ACX-024-230	TXV	23,800	14.50	12.00	CX34-30	SLP98UH070XV36B	5549322
13ACX-024-230	TXV	23,800	14.50	12.50	CX34-30	SLP98UH090XV36C	5549323
13ACX-024-230	TXV	24,000	13.50	11.50	CX34-31		5549329
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-31	EL180UH070E36B	5734563
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-31	EL180UH070XE36B	5734899
13ACX-024-230	TXV	24,200	15.00	12.50	CX34-31	EL195UH045XE36B	5549336
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-31	EL195UH070XE36B	5549337
13ACX-024-230	TXV	24,200	15.00	12.50	CX34-31	EL296UH045XE36B	5649120
13ACX-024-230	TXV	24,600	15.50	13.00	CX34-31	EL296UH045XV36B	5549330
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-31	EL296UH070XE36B	5649121
13ACX-024-230	TXV	24,600	15.50	13.00	CX34-31	EL296UH070XV36B	5549331
13ACX-024-230	TXV	24,800	15.10	13.00	CX34-31	SL280UH070V36A	5549332
13ACX-024-230	TXV	24,800	15.10	13.00	CX34-31	SL280UH070XV36A	5549333
13ACX-024-230	TXV	24,800	15.10	13.00	CX34-31	SL280UH090V36B	5549334
13ACX-024-230	TXV	24,600	15.50	12.50	CX34-31	SLP98UH070XV36B	5549335
13ACX-024-230	TXV	23,600	13.50	11.00	CX34-36		5549340
13ACX-024-230	TXV	23,800	15.00	12.50	CX34-36	EL180UH045E36A	5733888
13ACX-024-230	TXV	23,800	15.00	12.50	CX34-36	EL180UH045XE36A	5734171
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-36	EL180UH070E36B	5734564
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-36	EL180UH070XE36B	5734900
13ACX-024-230	TXV	24,000	15.00	12.50	CX34-36	EL195UH045XE36B	5549345
13ACX-024-230	TXV	24,000	15.00	12.50	CX34-36	EL195UH070XE36B	5549346
13ACX-024-230	TXV	24,000	15.00	12.50	CX34-36	EL296UH045XE36B	5649122
13ACX-024-230	TXV	24,200	15.00	12.50	CX34-36	EL296UH045XV36B	5549349
13ACX-024-230	TXV	24,000	15.00	12.50	CX34-36	EL296UH070XE36B	5649123
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-36	EL296UH070XV36B	5549350
13ACX-024-230	TXV	24,200	15.00	12.50	CX34-36	EL296UH090XV36C	5549354
13ACX-024-230	TXV	24,400	15.10	12.50	CX34-36	SL280UH070V36A	5549343
13ACX-024-230	TXV	24,400	15.10	12.50	CX34-36	SL280UH070XV36A	5549344
13ACX-024-230	TXV	24,400	15.10	12.50	CX34-36	SL280UH090V36B	5549351
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-36	SLP98UH070XV36B	5549352
13ACX-024-230	TXV	24,200	15.50	12.50	CX34-36	SLP98UH090XV36C	5549353
13ACX-024-230	TXV	24,200	14.00	11.50	CX34-38		5549355
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-38	EL180UH045E36A	5733889
13ACX-024-230	TXV	24,400	15.50	12.50	CX34-38	EL180UH045XE36A	5734172
13ACX-024-230	TXV	24,800	15.50	12.50	CX34-38	EL180UH070E36B	5734565
13ACX-024-230	TXV	24,800	15.50	12.50	CX34-38	EL180UH070XE36B	5734901
13ACX-024-230	TXV	24,600	15.50	12.50	CX34-38	EL195UH045XE36B	5549360
13ACX-024-230	TXV	24,600	15.50	13.00	CX34-38	EL195UH070XE36B	5549361
13ACX-024-230	TXV	24,600	15.50	12.50	CX34-38	EL296UH045XE36B	5649124
13ACX-024-230	TXV	24,800	15.50	12.50	CX34-38	EL296UH045XV36B	5549362
13ACX-024-230	TXV	24,600	15.50	13.00	CX34-38	EL296UH070XE36B	5649125

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-024-230	TXV	24,800	15.50	12.50	CX34-38	EL296UH070XV36B	5549363
13ACX-024-230	TXV	25,000	15.50	12.50	CX34-38	SL280UH070V36A	5549358
13ACX-024-230	TXV	25,000	15.50	12.50	CX34-38	SL280UH070XV36A	5549359
13ACX-024-230	TXV	25,000	15.50	12.50	CX34-38	SL280UH090V36B	5549366
13ACX-024-230	TXV	24,800	15.50	12.50	CX34-38	SLP98UH070XV36B	5549367
13ACX-030-230	RFC	28,400	13.00	11.00	C33-19		5548673
13ACX-030-230	RFC	28,800	13.00	11.00	C33-25		5548682
13ACX-030-230	RFC	28,200	13.00	11.00	C33-30		5548693
13ACX-030-230	RFC	29,200	13.00	11.00	C33-31		5548715
13ACX-030-230	RFC	28,600	13.00	11.00	C33-36		5548728
13ACX-030-230	RFC	29,400	13.50	11.50	C33-38		5548752
13ACX-030-230	RFC	28,600	13.00	11.00	C33-42		5548765
13ACX-030-230	RFC	29,600	13.00	11.00	C33-43		5548790
13ACX-030-230	RFC	28,800	13.00	11.00	CH23-41		5549382
13ACX-030-230	RFC	28,200	13.00	11.00	CH33-19		5549383
13ACX-030-230	RFC	29,000	13.00	11.00	CH33-25		5548825
13ACX-030-230	RFC	29,400	13.00	11.00	CH33-31		5548842
13ACX-030-230	RFC	28,600	13.00	11.00	CH33-36		5548858
13ACX-030-230	RFC	29,200	13.50	11.00	CH33-42		5548878
13ACX-030-230	RFC	29,600	13.50	11.50	CH33-43		5548891
13ACX-030-230	RFC	29,600	13.50	11.50	CH33-48		5548907
13ACX-030-230	RFC	29,000	13.50	11.00	CR33-30/36		5548918
13ACX-030-230	TXV	28,400	13.00	11.00	C33-19		5549073
13ACX-030-230	TXV	28,800	14.00	12.00	C33-19	EL180UH045E36A	5733858
13ACX-030-230	TXV	28,800	14.00	12.00	C33-19	EL180UH045XE36A	5734140
13ACX-030-230	TXV	28,800	14.50	12.00	C33-19	SL280UH070V36A	5548676
13ACX-030-230	TXV	28,800	14.50	12.00	C33-19	SL280UH070XV36A	5548677
13ACX-030-230	TXV	27,800	13.50	11.50	C33-24	EL180UH045E36A	5733855
13ACX-030-230	TXV	27,800	13.50	11.50	C33-24	EL180UH045XE36A	5734137
13ACX-030-230	TXV	28,200	13.50	11.50	C33-24	EL180UH070E36B	5734528
13ACX-030-230	TXV	28,200	13.50	11.50	C33-24	EL180UH070XE36B	5734868
13ACX-030-230	TXV	27,800	13.50	11.50	C33-24	EL180UH090E48B	5735671
13ACX-030-230	TXV	27,800	13.50	11.50	C33-24	EL180UH090XE48B	5737546
13ACX-030-230	TXV	27,800	13.50	11.50	C33-24	EL195UH045XE36B	5548665
13ACX-030-230	TXV	28,000	13.50	11.50	C33-24	EL195UH070XE36B	5548666
13ACX-030-230	TXV	27,800	13.50	11.50	C33-24	EL296UH045XE36B	5649037
13ACX-030-230	TXV	27,800	13.50	11.00	C33-24	EL296UH045XV36B	5548667
13ACX-030-230	TXV	28,000	13.50	11.50	C33-24	EL296UH070XE36B	5649038
13ACX-030-230	TXV	27,800	13.50	11.50	C33-24	EL296UH070XV36B	5548668
13ACX-030-230	TXV	28,000	13.50	11.50	C33-24	SL280UH070V36A	5548658
13ACX-030-230	TXV	28,000	13.50	11.50	C33-24	SL280UH070XV36A	5548659
13ACX-030-230	TXV	28,200	13.50	11.50	C33-24	SL280UH090V36B	5548660
13ACX-030-230	TXV	28,400	13.00	11.00	C33-24	SL280UH090V48B	5548661
13ACX-030-230	TXV	28,400	13.00	11.00	C33-24	SL280UH090XV48B	5548662
13ACX-030-230	TXV	28,000	13.50	11.50	C33-24	SLP98UH070XV36B	5548663
13ACX-030-230	TXV	28,000	13.50	11.50	C33-24	SLP98UH090XV36C	5548664
13ACX-030-230	TXV	28,800	13.00	11.00	C33-25		5549074
13ACX-030-230	TXV	29,200	14.50	12.00	C33-25	EL180UH045E36A	5733859
13ACX-030-230	TXV	29,200	14.50	12.00	C33-25	EL180UH045XE36A	5734141

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	29,200	14.50	12.00	C33-25	EL195UH045XE36B	5548683
13ACX-030-230	TXV	29,400	14.50	12.00	C33-25	EL195UH070XE36B	5548684
13ACX-030-230	TXV	29,200	14.50	12.00	C33-25	EL296UH045XE36B	5649041
13ACX-030-230	TXV	29,200	14.50	12.00	C33-25	EL296UH045XV36B	5548685
13ACX-030-230	TXV	29,400	14.50	12.00	C33-25	EL296UH070XE36B	5649042
13ACX-030-230	TXV	29,200	14.50	12.00	C33-25	EL296UH070XV36B	5548687
13ACX-030-230	TXV	29,400	14.50	12.00	C33-25	SL280UH070V36A	5548680
13ACX-030-230	TXV	29,400	14.50	12.00	C33-25	SL280UH070XV36A	5548681
13ACX-030-230	TXV	29,400	14.50	12.00	C33-25	SL280UH090V36B	5548686
13ACX-030-230	TXV	29,600	14.50	12.00	C33-25	SL280UH090V48B	5548688
13ACX-030-230	TXV	29,600	14.50	12.00	C33-25	SL280UH090XV48B	5548689
13ACX-030-230	TXV	29,200	14.50	12.00	C33-25	SLP98UH070XV36B	5548690
13ACX-030-230	TXV	28,200	13.00	11.00	C33-30		5549075
13ACX-030-230	TXV	28,400	14.00	11.50	C33-30	EL180UH045E36A	5733861
13ACX-030-230	TXV	28,400	14.00	11.50	C33-30	EL180UH045XE36A	5734143
13ACX-030-230	TXV	28,400	14.00	12.00	C33-30	EL180UH070E36B	5734532
13ACX-030-230	TXV	28,400	14.00	12.00	C33-30	EL180UH070XE36B	5734872
13ACX-030-230	TXV	28,400	14.00	12.00	C33-30	EL180UH090E48B	5735677
13ACX-030-230	TXV	28,400	14.00	12.00	C33-30	EL180UH090XE48B	5737550
13ACX-030-230	TXV	28,400	13.50	11.50	C33-30	EL195UH045XE36B	5548703
13ACX-030-230	TXV	28,600	13.50	11.50	C33-30	EL195UH070XE36B	5548704
13ACX-030-230	TXV	28,800	14.00	12.00	C33-30	EL195UH090XE48C	5548709
13ACX-030-230	TXV	28,400	13.50	11.50	C33-30	EL296UH045XE36B	5649045
13ACX-030-230	TXV	28,600	14.00	11.50	C33-30	EL296UH045XV36B	5548694
13ACX-030-230	TXV	28,600	13.50	11.50	C33-30	EL296UH070XE36B	5649046
13ACX-030-230	TXV	28,600	14.00	12.00	C33-30	EL296UH070XV36B	5548695
13ACX-030-230	TXV	28,800	14.00	12.00	C33-30	EL296UH090XE48C	5649047
13ACX-030-230	TXV	28,800	14.00	12.00	C33-30	SL280UH070V36A	5548696
13ACX-030-230	TXV	28,800	14.00	12.00	C33-30	SL280UH070XV36A	5548697
13ACX-030-230	TXV	28,800	14.00	12.00	C33-30	SL280UH090V36B	5548698
13ACX-030-230	TXV	29,000	14.00	11.70	C33-30	SL280UH090V48B	5548699
13ACX-030-230	TXV	29,000	14.00	11.70	C33-30	SL280UH090XV48B	5548700
13ACX-030-230	TXV	28,600	14.00	11.50	C33-30	SLP98UH070XV36B	5548701
13ACX-030-230	TXV	28,600	14.00	12.00	C33-30	SLP98UH090XV36C	5548702
13ACX-030-230	TXV	29,200	13.00	11.00	C33-31		5549076
13ACX-030-230	TXV	29,800	14.50	12.00	C33-31	EL180UH045E36A	6679351
13ACX-030-230	TXV	29,800	14.50	12.00	C33-31	EL180UH045XE36A	6679352
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	EL180UH070E36B	5734534
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	EL180UH070XE36B	5734873
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	EL180UH090E48B	5735683
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	EL180UH090XE48B	5737555
13ACX-030-230	TXV	29,800	14.50	12.00	C33-31	EL195UH045XE36B	5548716
13ACX-030-230	TXV	30,000	14.50	12.00	C33-31	EL195UH070XE36B	5548717
13ACX-030-230	TXV	29,800	14.50	12.00	C33-31	EL296UH045XE36B	5649050
13ACX-030-230	TXV	29,600	14.50	12.00	C33-31	EL296UH045XV36B	5548718
13ACX-030-230	TXV	30,000	14.50	12.00	C33-31	EL296UH070XE36B	5649051
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	EL296UH070XV36B	5548719
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	SL280UH070V36A	5548713
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	SL280UH070XV36A	5548714

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	30,000	15.00	12.50	C33-31	SL280UH090V36B	5548724
13ACX-030-230	TXV	30,000	15.00	12.50	C33-31	SL280UH090V48B	5548725
13ACX-030-230	TXV	30,000	15.00	12.50	C33-31	SL280UH090XV48B	5548726
13ACX-030-230	TXV	29,800	15.00	12.50	C33-31	SLP98UH070XV36B	5548727
13ACX-030-230	TXV	28,600	13.00	11.00	C33-36		5549077
13ACX-030-230	TXV	29,200	14.50	12.00	C33-36	EL180UH045E36A	5733863
13ACX-030-230	TXV	29,200	14.50	12.00	C33-36	EL180UH045XE36A	5734145
13ACX-030-230	TXV	29,200	15.00	12.50	C33-36	EL180UH070E36B	5734537
13ACX-030-230	TXV	29,200	15.00	12.50	C33-36	EL180UH070XE36B	5734876
13ACX-030-230	TXV	29,400	15.00	12.50	C33-36	EL180UH090E48B	5735687
13ACX-030-230	TXV	29,400	15.00	12.50	C33-36	EL180UH090XE48B	5737561
13ACX-030-230	TXV	29,200	14.50	12.00	C33-36	EL195UH045XE36B	5548733
13ACX-030-230	TXV	29,400	14.50	12.00	C33-36	EL195UH070XE36B	5548734
13ACX-030-230	TXV	29,000	14.50	12.00	C33-36	EL195UH090XE48C	5548746
13ACX-030-230	TXV	29,200	14.50	12.00	C33-36	EL296UH045XE36B	5649060
13ACX-030-230	TXV	29,000	14.50	12.00	C33-36	EL296UH045XV36B	5548739
13ACX-030-230	TXV	29,400	14.50	12.00	C33-36	EL296UH070XE36B	5649061
13ACX-030-230	TXV	29,000	14.50	12.00	C33-36	EL296UH070XV36B	5548740
13ACX-030-230	TXV	29,000	14.50	12.00	C33-36	EL296UH090XE48C	5649062
13ACX-030-230	TXV	29,200	15.00	12.50	C33-36	EL296UH090XV36C	5548747
13ACX-030-230	TXV	29,200	14.50	12.00	C33-36	SL280UH070V36A	5548731
13ACX-030-230	TXV	29,200	14.50	12.00	C33-36	SL280UH070XV36A	5548732
13ACX-030-230	TXV	29,400	15.00	12.50	C33-36	SL280UH090V36B	5548741
13ACX-030-230	TXV	29,600	14.50	12.20	C33-36	SL280UH090V48B	5548742
13ACX-030-230	TXV	29,600	14.50	12.20	C33-36	SL280UH090XV48B	5548743
13ACX-030-230	TXV	29,200	14.50	12.00	C33-36	SLP98UH070XV36B	5548744
13ACX-030-230	TXV	29,200	15.00	12.50	C33-36	SLP98UH090XV36C	5548745
13ACX-030-230	TXV	29,400	13.50	11.50	C33-38		5549078
13ACX-030-230	TXV	30,000	15.00	12.50	C33-38	EL180UH045E36A	5733864
13ACX-030-230	TXV	30,000	15.00	12.50	C33-38	EL180UH045XE36A	5734146
13ACX-030-230	TXV	30,000	15.00	12.50	C33-38	EL180UH070E36B	5734538
13ACX-030-230	TXV	30,000	15.00	12.50	C33-38	EL180UH070XE36B	5734877
13ACX-030-230	TXV	30,200	15.50	12.50	C33-38	EL180UH090E48B	5735688
13ACX-030-230	TXV	30,200	15.50	12.50	C33-38	EL180UH090XE48B	5737563
13ACX-030-230	TXV	30,000	15.00	12.00	C33-38	EL195UH045XE36B	5548753
13ACX-030-230	TXV	30,200	15.00	12.00	C33-38	EL195UH070XE36B	5548754
13ACX-030-230	TXV	30,000	15.00	12.00	C33-38	EL296UH045XE36B	5649063
13ACX-030-230	TXV	29,800	15.00	12.00	C33-38	EL296UH045XV36B	5548755
13ACX-030-230	TXV	30,200	15.00	12.00	C33-38	EL296UH070XE36B	5649064
13ACX-030-230	TXV	29,800	15.00	12.50	C33-38	EL296UH070XV36B	5548756
13ACX-030-230	TXV	30,000	15.00	12.50	C33-38	SL280UH070V36A	5548750
13ACX-030-230	TXV	30,000	15.00	12.50	C33-38	SL280UH070XV36A	5548751
13ACX-030-230	TXV	30,200	15.50	12.50	C33-38	SL280UH090V36B	5548761
13ACX-030-230	TXV	30,200	15.00	12.50	C33-38	SL280UH090V48B	5548762
13ACX-030-230	TXV	30,200	15.00	12.50	C33-38	SL280UH090XV48B	5548763
13ACX-030-230	TXV	30,000	15.00	12.50	C33-38	SLP98UH070XV36B	5548764
13ACX-030-230	TXV	28,600	13.00	11.00	C33-42		5549079
13ACX-030-230	TXV	29,200	15.00	12.50	C33-42	EL180UH070E36B	5734540
13ACX-030-230	TXV	29,200	15.00	12.50	C33-42	EL180UH070XE36B	5734878

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	29,400	15.00	12.50	C33-42	EL180UH090E48B	5735691
13ACX-030-230	TXV	29,400	15.00	12.50	C33-42	EL180UH090XE48B	5737565
13ACX-030-230	TXV	29,200	14.50	12.00	C33-42	EL195UH045XE36B	5548766
13ACX-030-230	TXV	29,400	14.50	12.00	C33-42	EL195UH070XE36B	5548767
13ACX-030-230	TXV	29,200	14.50	12.00	C33-42	EL296UH045XE36B	5649065
13ACX-030-230	TXV	29,000	14.50	12.00	C33-42	EL296UH045XV36B	5548768
13ACX-030-230	TXV	29,400	14.50	12.00	C33-42	EL296UH070XE36B	5649066
13ACX-030-230	TXV	29,000	14.50	12.00	C33-42	EL296UH070XV36B	5548769
13ACX-030-230	TXV	29,400	15.00	12.50	C33-42	SL280UH090V36B	5548774
13ACX-030-230	TXV	29,600	14.50	12.20	C33-42	SL280UH090V48B	5548775
13ACX-030-230	TXV	29,600	14.50	12.20	C33-42	SL280UH090XV48B	5548776
13ACX-030-230	TXV	29,200	14.50	12.00	C33-42	SLP98UH070XV36B	5548777
13ACX-030-230	TXV	29,600	13.00	11.00	C33-43		5549080
13ACX-030-230	TXV	30,200	15.50	12.50	C33-43	EL180UH070E36B	5734526
13ACX-030-230	TXV	30,200	15.50	12.50	C33-43	EL180UH070XE36B	5734866
13ACX-030-230	TXV	30,400	15.50	12.50	C33-43	EL180UH090E48B	5735666
13ACX-030-230	TXV	30,400	15.50	12.50	C33-43	EL180UH090XE48B	5737542
13ACX-030-230	TXV	30,200	15.00	12.50	C33-43	EL195UH045XE36B	5548778
13ACX-030-230	TXV	30,400	15.00	12.50	C33-43	EL195UH070XE36B	5548779
13ACX-030-230	TXV	30,200	15.50	12.50	C33-43	EL195UH090XE48C	5548791
13ACX-030-230	TXV	30,200	15.00	12.50	C33-43	EL296UH045XE36B	5649031
13ACX-030-230	TXV	30,000	15.00	12.50	C33-43	EL296UH045XV36B	5548780
13ACX-030-230	TXV	30,400	15.00	12.50	C33-43	EL296UH070XE36B	5649032
13ACX-030-230	TXV	30,000	15.00	12.50	C33-43	EL296UH070XV36B	5548781
13ACX-030-230	TXV	30,200	15.50	12.50	C33-43	EL296UH090XE48C	5649033
13ACX-030-230	TXV	30,200	15.50	12.50	C33-43	EL296UH090XV36C	5548792
13ACX-030-230	TXV	30,200	15.50	12.50	C33-43	SL280UH090V36B	5548786
13ACX-030-230	TXV	30,400	15.00	12.50	C33-43	SL280UH090V48B	5548787
13ACX-030-230	TXV	30,400	15.00	12.50	C33-43	SL280UH090XV48B	5548788
13ACX-030-230	TXV	30,200	15.00	12.50	C33-43	SLP98UH070XV36B	5548789
13ACX-030-230	TXV	30,200	15.50	12.50	C33-43	SLP98UH090XV36C	5548793
13ACX-030-230	TXV	28,800	13.00	11.00	CBX25UH-030		5732778
13ACX-030-230	TXV	29,200	13.50	11.50	CBX25UH-036		6972261
13ACX-030-230	TXV	29,400	14.50	12.20	CBX25UHV-030		6970118
13ACX-030-230	TXV	29,600	15.00	12.50	CBX27UH-030		5548795
13ACX-030-230	TXV	29,800	15.00	12.50	CBX27UH-036		5548796
13ACX-030-230	TXV	28,200	13.00	11.00	CBX32M-018/024		5548801
13ACX-030-230	TXV	29,400	14.00	12.00	CBX32M-030		5548799
13ACX-030-230	TXV	29,200	14.00	11.50	CBX32M-036		5548800
13ACX-030-230	TXV	29,200	14.00	11.50	CBX32MV-024/030		5548802
13ACX-030-230	TXV	29,600	14.50	12.00	CBX32MV-036		5548803
13ACX-030-230	TXV	29,400	14.50	12.00	CBX40UHV-030		5548804
13ACX-030-230	TXV	29,600	14.50	12.00	CBX40UHV-036		5548805
13ACX-030-230	TXV	28,800	13.00	11.00	CH23-41		5549081
13ACX-030-230	TXV	29,600	14.50	12.00	CH23-41	EL180UH045E36A	5733854
13ACX-030-230	TXV	29,600	14.50	12.00	CH23-41	EL180UH045XE36A	5734136
13ACX-030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH070E36B	5734527
13ACX-030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH070XE36B	5734867
13ACX-030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH090E48B	5735668

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH090XE48B	5737544
13ACX-030-230	TXV	29,600	14.50	12.00	CH23-41	EL195UH045XE36B	5548806
13ACX-030-230	TXV	29,600	14.50	12.00	CH23-41	EL195UH070XE36B	5548807
13ACX-030-230	TXV	29,400	15.00	12.50	CH23-41	EL195UH090XE48C	5548808
13ACX-030-230	TXV	29,600	14.50	12.00	CH23-41	EL296UH045XE36B	5649034
13ACX-030-230	TXV	29,400	14.50	12.50	CH23-41	EL296UH045XV36B	5548809
13ACX-030-230	TXV	29,600	14.50	12.00	CH23-41	EL296UH070XE36B	5649035
13ACX-030-230	TXV	29,400	15.00	12.50	CH23-41	EL296UH070XV36B	5548810
13ACX-030-230	TXV	29,400	15.00	12.50	CH23-41	EL296UH090XE48C	5649036
13ACX-030-230	TXV	29,600	15.00	12.50	CH23-41	SL280UH070V36A	5548814
13ACX-030-230	TXV	29,600	15.00	12.50	CH23-41	SL280UH070XV36A	5548818
13ACX-030-230	TXV	29,600	15.00	12.50	CH23-41	SL280UH090V36B	5548819
13ACX-030-230	TXV	29,400	15.00	12.50	CH23-41	SLP98UH070XV36B	5548820
13ACX-030-230	TXV	28,200	13.00	11.00	CH33-19		5549082
13ACX-030-230	TXV	28,600	14.00	11.50	CH33-19	EL180UH045E36A	5733856
13ACX-030-230	TXV	28,600	14.00	11.50	CH33-19	EL180UH045XE36A	5734138
13ACX-030-230	TXV	28,800	14.00	12.00	CH33-19	SL280UH070V36A	5548822
13ACX-030-230	TXV	28,800	14.00	12.00	CH33-19	SL280UH070XV36A	5548824
13ACX-030-230	TXV	29,000	13.00	11.00	CH33-25		5549083
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-25	EL296UH045XV36B	5548834
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-25	EL296UH070XV36B	5548835
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-25	SL280UH070V36A	5548827
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-25	SL280UH070XV36A	5548830
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-25	SL280UH090V36B	5548838
13ACX-030-230	TXV	29,600	14.50	12.20	CH33-25	SL280UH090V48B	5548839
13ACX-030-230	TXV	29,600	14.50	12.20	CH33-25	SL280UH090XV48B	5548840
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-25	SLP98UH070XV36B	5548841
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-25A	EL180UH045E36A	5733857
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-25A	EL180UH045XE36A	5734139
13ACX-030-230	TXV	29,200	15.00	12.50	CH33-25B	EL180UH070E36B	5734529
13ACX-030-230	TXV	29,200	15.00	12.50	CH33-25B	EL180UH070XE36B	5734869
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-25B	EL180UH090E48B	5735672
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-25B	EL180UH090XE48B	5737548
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-25B	EL195UH045XE36B	5548828
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-25B	EL195UH070XE36B	5548833
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-25B	EL296UH045XE36B	5649039
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-25B	EL296UH070XE36B	5649040
13ACX-030-230	TXV	29,400	13.00	11.00	CH33-31		5549084
13ACX-030-230	TXV	29,800	15.00	12.00	CH33-31	EL296UH045XV36B	5548851
13ACX-030-230	TXV	29,800	15.00	12.50	CH33-31	EL296UH070XV36B	5548852
13ACX-030-230	TXV	29,800	15.00	12.00	CH33-31	SL280UH070V36A	5548844
13ACX-030-230	TXV	29,800	15.00	12.00	CH33-31	SL280UH070XV36A	5548846
13ACX-030-230	TXV	30,200	15.50	12.50	CH33-31	SL280UH090V36B	5548855
13ACX-030-230	TXV	30,200	15.00	12.50	CH33-31	SL280UH090V48B	5548856
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-31	SL280UH090XV48B	5548848
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-31	SLP98UH070XV36B	5548857
13ACX-030-230	TXV	29,800	14.50	12.00	CH33-31A	EL180UH045E36A	5733860
13ACX-030-230	TXV	29,800	14.50	12.00	CH33-31A	EL180UH045XE36A	5734142
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-31B	EL180UH070E36B	5734530

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-31B	EL180UH070XE36B	5734870
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-31B	EL180UH090E48B	5735674
13ACX-030-230	TXV	30,000	14.50	12.00	CH33-31B	EL195UH045XE36B	5548849
13ACX-030-230	TXV	30,200	15.00	12.50	CH33-31B	EL195UH070XE36B	5548850
13ACX-030-230	TXV	30,000	14.50	12.00	CH33-31B	EL296UH045XE36B	5649043
13ACX-030-230	TXV	30,200	15.00	12.50	CH33-31B	EL296UH070XE36B	5649044
13ACX-030-230	TXV	28,600	13.00	11.00	CH33-36		5549085
13ACX-030-230	TXV	29,000	14.50	12.00	CH33-36	EL296UH045XV36B	5548868
13ACX-030-230	TXV	29,000	14.50	12.00	CH33-36	EL296UH070XV36B	5548869
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-36	EL296UH090XV36C	5548877
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-36	SL280UH070V36A	5548860
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-36	SL280UH070XV36A	5548862
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-36	SL280UH090V36B	5548872
13ACX-030-230	TXV	29,600	14.50	12.20	CH33-36	SL280UH090V48B	5548873
13ACX-030-230	TXV	29,600	14.50	12.20	CH33-36	SL280UH090XV48B	5548865
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-36	SLP98UH070XV36B	5548874
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-36	SLP98UH090XV36C	5548876
13ACX-030-230	TXV	29,000	14.50	12.00	CH33-36A	EL180UH045E36A	5733862
13ACX-030-230	TXV	29,000	14.50	12.00	CH33-36A	EL180UH045XE36A	5734144
13ACX-030-230	TXV	29,200	14.50	12.50	CH33-36B	EL180UH070E36B	5734533
13ACX-030-230	TXV	29,200	14.50	12.50	CH33-36B	EL180UH070XE36B	5734871
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-36B	EL180UH090E48B	5735678
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-36B	EL180UH090XE48B	5737552
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-36B	EL195UH045XE36B	5548866
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-36B	EL195UH070XE36B	5548867
13ACX-030-230	TXV	29,200	14.50	12.00	CH33-36B	EL296UH045XE36B	5649048
13ACX-030-230	TXV	29,400	14.50	12.00	CH33-36B	EL296UH070XE36B	5649049
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-36C	EL195UH090XE48C	5548875
13ACX-030-230	TXV	29,400	15.00	12.50	CH33-36C	EL296UH090XE48C	5649052
13ACX-030-230	TXV	29,200	13.50	11.00	CH33-42		5549086
13ACX-030-230	TXV	29,800	15.00	12.50	CH33-42	EL180UH070E36B	5734535
13ACX-030-230	TXV	29,800	15.00	12.50	CH33-42	EL180UH070XE36B	5734874
13ACX-030-230	TXV	29,800	15.00	12.50	CH33-42	EL180UH090E48B	5735680
13ACX-030-230	TXV	29,800	15.00	12.50	CH33-42	EL180UH090XE48B	5737557
13ACX-030-230	TXV	29,800	14.50	12.00	CH33-42	EL195UH045XE36B	5548879
13ACX-030-230	TXV	29,800	14.50	12.00	CH33-42	EL195UH070XE36B	5548880
13ACX-030-230	TXV	29,800	14.50	12.00	CH33-42	EL296UH045XE36B	5649053
13ACX-030-230	TXV	29,600	14.50	12.00	CH33-42	EL296UH045XV36B	5548881
13ACX-030-230	TXV	29,800	14.50	12.00	CH33-42	EL296UH070XE36B	5649054
13ACX-030-230	TXV	29,600	15.00	12.50	CH33-42	EL296UH070XV36B	5548882
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-42	SL280UH090V36B	5548885
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-42	SL280UH090V48B	5548886
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-42	SL280UH090XV48B	5548889
13ACX-030-230	TXV	29,800	15.00	12.50	CH33-42	SLP98UH070XV36B	5548890
13ACX-030-230	TXV	29,600	13.50	11.50	CH33-43		5549087
13ACX-030-230	TXV	30,400	15.50	12.50	CH33-43B	EL180UH070E36B	5734536
13ACX-030-230	TXV	30,400	15.50	12.50	CH33-43B	EL180UH070XE36B	5734875
13ACX-030-230	TXV	30,600	15.50	12.50	CH33-43B	EL180UH090E48B	5735684
13ACX-030-230	TXV	30,600	15.50	12.50	CH33-43B	EL180UH090XE48B	5737559

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	30,400	15.00	12.50	CH33-43B	EL195UH045XE36B	5548892
13ACX-030-230	TXV	30,600	15.00	12.50	CH33-43B	EL195UH070XE36B	5548893
13ACX-030-230	TXV	30,400	15.00	12.50	CH33-43B	EL296UH045XE36B	5649055
13ACX-030-230	TXV	30,200	15.00	12.50	CH33-43B	EL296UH045XV36B	5548894
13ACX-030-230	TXV	30,600	15.00	12.50	CH33-43B	EL296UH070XE36B	5649056
13ACX-030-230	TXV	30,200	15.50	12.50	CH33-43B	EL296UH070XV36B	5548895
13ACX-030-230	TXV	30,600	15.50	13.00	CH33-43B	SL280UH090V36B	5548898
13ACX-030-230	TXV	30,800	15.50	12.50	CH33-43B	SL280UH090V48B	5548899
13ACX-030-230	TXV	30,600	15.10	12.50	CH33-43B	SL280UH090XV48B	5548902
13ACX-030-230	TXV	30,400	15.00	12.50	CH33-43B	SLP98UH070XV36B	5548903
13ACX-030-230	TXV	30,200	15.00	12.50	CH33-43C	EL195UH090XE48C	5548904
13ACX-030-230	TXV	30,200	15.00	12.50	CH33-43C	EL296UH090XE48C	5649057
13ACX-030-230	TXV	30,200	15.50	12.50	CH33-43C	EL296UH090XV36C	5548905
13ACX-030-230	TXV	30,200	15.50	12.50	CH33-43C	SLP98UH090XV36C	5548906
13ACX-030-230	TXV	29,600	13.50	11.50	CH33-48		5549088
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-48	EL296UH090XV36C	5548908
13ACX-030-230	TXV	30,000	15.00	12.50	CH33-48	SLP98UH090XV36C	5548909
13ACX-030-230	TXV	28,400	13.00	11.00	CH35-18A		7164206
13ACX-030-230	TXV	28,800	14.25	12.00	CH35-18A	EL180UH045E36A	7164207
13ACX-030-230	TXV	28,800	14.25	12.00	CH35-18A	EL180UH045XE36A	7164208
13ACX-030-230	TXV	29,000	14.25	12.00	CH35-18A	SL280UH070V36A	7164209
13ACX-030-230	TXV	29,000	14.25	12.00	CH35-18A	SL280UH070XV36A	7164210
13ACX-030-230	TXV	29,000	13.00	11.00	CH35-24A		7164211
13ACX-030-230	TXV	29,400	14.50	12.20	CH35-24A	EL180UH045E36A	7164213
13ACX-030-230	TXV	29,400	14.50	12.20	CH35-24A	EL180UH045XE36A	7164214
13ACX-030-230	TXV	29,600	14.50	12.20	CH35-24A	SL280UH070V36A	7164215
13ACX-030-230	TXV	29,600	14.50	12.20	CH35-24A	SL280UH070XV36A	7164216
13ACX-030-230	TXV	28,800	13.00	11.00	CH35-24B		7164212
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH070E36B	7164223
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH070XE36B	7164224
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH090E48B	7164225
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH090XE48B	7164226
13ACX-030-230	TXV	29,400	14.50	12.20	CH35-24B	EL195UH045XE36B	7164217
13ACX-030-230	TXV	29,600	14.50	12.20	CH35-24B	EL195UH070XE36B	7164218
13ACX-030-230	TXV	29,400	14.50	12.20	CH35-24B	EL296UH045XE36B	7164219
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-24B	EL296UH045XV36B	7164221
13ACX-030-230	TXV	29,600	14.50	12.20	CH35-24B	EL296UH070XE36B	7164220
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-24B	EL296UH070XV36B	7164222
13ACX-030-230	TXV	29,600	15.00	12.50	CH35-24B	SL280UH090V36B	7164227
13ACX-030-230	TXV	29,800	14.50	12.20	CH35-24B	SL280UH090V48B	7164563
13ACX-030-230	TXV	29,800	14.50	12.20	CH35-24B	SL280UH090XV48B	7164564
13ACX-030-230	TXV	29,400	14.50	12.20	CH35-24B	SLP98UH070XV36B	7164228
13ACX-030-230	TXV	29,400	13.00	11.50	CH35-30A		7164229
13ACX-030-230	TXV	29,800	14.50	12.20	CH35-30A	EL180UH045E36A	7164231
13ACX-030-230	TXV	30,000	15.00	12.50	CH35-30A	SL280UH070V36A	7164233
13ACX-030-230	TXV	30,000	15.00	12.50	CH35-30A	SL280UH070XV36A	7164234
13ACX-030-230	TXV	29,600	13.00	11.50	CH35-30B		7164230
13ACX-030-230	TXV	29,800	14.50	12.20	CH35-30B	EL180UH045XE36A	7164232
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH070E36B	7164241

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH070XE36B	7164242
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH090E48B	7164243
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH090XE48B	7164244
13ACX-030-230	TXV	30,000	15.00	12.20	CH35-30B	EL195UH045XE36B	7164235
13ACX-030-230	TXV	30,000	15.00	12.20	CH35-30B	EL195UH070XE36B	7164236
13ACX-030-230	TXV	30,000	15.00	12.20	CH35-30B	EL296UH045XE36B	7164237
13ACX-030-230	TXV	29,800	15.00	12.20	CH35-30B	EL296UH045XV36B	7164239
13ACX-030-230	TXV	30,000	15.00	12.20	CH35-30B	EL296UH070XE36B	7164238
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	EL296UH070XV36B	7164240
13ACX-030-230	TXV	30,000	15.50	12.50	CH35-30B	SL280UH090V36B	7164245
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	SL280UH090V48B	7164565
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	SL280UH090XV48B	7164566
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-30B	SLP98UH070XV36B	7164246
13ACX-030-230	TXV	28,800	13.00	11.00	CH35-36A		7164247
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-36A	EL180UH045E36A	7164250
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-36A	EL180UH045XE36A	7164251
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-36A	SL280UH070V36A	7164252
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-36A	SL280UH070XV36A	7164253
13ACX-030-230	TXV	28,800	13.00	11.00	CH35-36B		7164248
13ACX-030-230	TXV	29,200	15.00	12.50	CH35-36B	EL180UH070E36B	7164260
13ACX-030-230	TXV	29,200	15.00	12.50	CH35-36B	EL180UH070XE36B	7164261
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-36B	EL180UH090E48B	7164262
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-36B	EL180UH090XE48B	7164263
13ACX-030-230	TXV	29,200	14.50	12.00	CH35-36B	EL195UH045XE36B	7164254
13ACX-030-230	TXV	29,400	14.50	12.00	CH35-36B	EL195UH070XE36B	7164255
13ACX-030-230	TXV	29,200	14.50	12.00	CH35-36B	EL296UH045XE36B	7164256
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-36B	EL296UH045XV36B	7164258
13ACX-030-230	TXV	29,400	14.50	12.00	CH35-36B	EL296UH070XE36B	7164257
13ACX-030-230	TXV	29,200	14.50	12.20	CH35-36B	EL296UH070XV36B	7164259
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-36B	SL280UH090V36B	7164264
13ACX-030-230	TXV	29,600	14.50	12.20	CH35-36B	SL280UH090V48B	7164567
13ACX-030-230	TXV	29,600	14.50	12.20	CH35-36B	SL280UH090XV48B	7164568
13ACX-030-230	TXV	29,400	14.50	12.20	CH35-36B	SLP98UH070XV36B	7164265
13ACX-030-230	TXV	29,000	13.00	11.00	CH35-36C		7164249
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-36C	EL195UH090XE48C	7164266
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-36C	EL296UH090XE48C	7164267
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-36C	EL296UH090XV36C	7164268
13ACX-030-230	TXV	29,400	15.00	12.50	CH35-36C	SLP98UH090XV36C	7164269
13ACX-030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH070E36B	7164276
13ACX-030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH070XE36B	7164277
13ACX-030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH090E48B	7164278
13ACX-030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH090XE48B	7164279
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	EL195UH045XE36B	7164270
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	EL195UH070XE36B	7164271
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH045XE36B	7164274
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH045XV36B	7164272
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH070XE36B	7164275
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH070XV36B	7164273
13ACX-030-230	TXV	30,000	15.50	13.00	CH35-42B	SL280UH090V36B	7164280

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	SL280UH090V48B	7164569
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	SL280UH090XV48B	7164570
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42B	SLP98UH070XV36B	7164281
13ACX-030-230	TXV	29,600	13.00	11.50	CH35-42C		7164571
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42C	EL195UH090XE48C	7164283
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-42C	EL296UH090XE48C	7164284
13ACX-030-230	TXV	30,000	15.50	12.50	CH35-42C	EL296UH090XV36C	7164285
13ACX-030-230	TXV	30,000	15.50	12.50	CH35-42C	SLP98UH090XV36C	7164286
13ACX-030-230	TXV	29,600	13.00	11.50	CH35-48B		7164287
13ACX-030-230	TXV	29,800	13.00	11.50	CH35-48C		7164282
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-48C	EL296UH090XV36C	7164288
13ACX-030-230	TXV	30,000	15.10	12.50	CH35-48C	SLP98UH090XV36C	7164289
13ACX-030-230	TXV	27,400	13.00	10.50	CR33-24		5548912
13ACX-030-230	TXV	27,400	13.00	10.50	CR33-24		5549089
13ACX-030-230	TXV	28,000	13.50	11.50	CR33-24	EL180DF045E36A	5733344
13ACX-030-230	TXV	28,200	13.50	11.50	CR33-24	EL180DF070E36B	5733431
13ACX-030-230	TXV	27,800	13.50	11.50	CR33-24	EL195DF045XE36B	5548913
13ACX-030-230	TXV	28,000	13.50	11.50	CR33-24	EL195DF070XE48B	6680976
13ACX-030-230	TXV	27,800	13.50	11.50	CR33-24	EL296DF045XE36B	5649058
13ACX-030-230	TXV	28,200	14.00	11.50	CR33-24	EL296DF045XV36B	5548915
13ACX-030-230	TXV	28,000	13.50	11.50	CR33-24	EL296DF070XE48B	5765601
13ACX-030-230	TXV	28,200	14.00	11.50	CR33-24	SL280DF070V36A	5548911
13ACX-030-230	TXV	27,600	13.00	11.00	CR33-24	SL280DF090V48B	5548917
13ACX-030-230	TXV	29,000	13.50	11.00	CR33-30/36		5549090
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL180DF045E36A	5733345
13ACX-030-230	TXV	29,600	15.00	12.50	CR33-30/36	EL180DF070E36B	5733433
13ACX-030-230	TXV	29,400	14.50	12.00	CR33-30/36	EL180DF090E48B	5733485
13ACX-030-230	TXV	29,400	14.50	12.00	CR33-30/36	EL195DF045XE36B	5548921
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL195DF070XE48B	6680977
13ACX-030-230	TXV	29,400	15.00	12.00	CR33-30/36	EL195DF090XE48C	5548929
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF045V36B	5548923
13ACX-030-230	TXV	29,400	14.50	12.00	CR33-30/36	EL296DF045XE36B	5649067
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF045XV36B	7505723
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF070V48B	5548924
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF070XE48B	5765602
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF070XV48B	7505706
13ACX-030-230	TXV	29,400	15.00	12.00	CR33-30/36	EL296DF090XE48C	5649069
13ACX-030-230	TXV	29,600	14.50	12.00	CR33-30/36	SL280DF070V36A	5548920
13ACX-030-230	TXV	29,200	14.50	12.20	CR33-30/36	SL280DF090V48B	5548927
13ACX-030-230	TXV	29,400	14.50	12.00	CR33-30/36	SLP98DF070XV36B	5548928
13ACX-030-230	TXV	29,600	15.00	12.50	CR33-30/36	SLP98DF090XV36C	5548930
13ACX-030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL180UH045E36A	5733865
13ACX-030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL180UH045XE36A	5734147
13ACX-030-230	TXV	28,200	13.50	11.50	CX34-18/24	EL180UH070E36B	5734541
13ACX-030-230	TXV	28,200	13.50	11.50	CX34-18/24	EL180UH070XE36B	5734879
13ACX-030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL180UH090E48B	5735692
13ACX-030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL180UH090XE48B	5737567
13ACX-030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL195UH045XE36B	5548940
13ACX-030-230	TXV	28,000	13.50	11.50	CX34-18/24	EL195UH070XE36B	5548941

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL296UH045XE36B	5649070
13ACX-030-230	TXV	28,000	13.50	11.50	CX34-18/24	EL296UH070XE36B	5649071
13ACX-030-230	TXV	27,800	13.50	11.00	CX34-18/24	EL296UH070XV36B	5548946
13ACX-030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL296UH090XV36C	5558648
13ACX-030-230	TXV	28,000	13.50	11.50	CX34-18/24	SL280UH070V36A	5548933
13ACX-030-230	TXV	28,000	13.50	11.50	CX34-18/24	SL280UH070XV36A	5548934
13ACX-030-230	TXV	28,200	13.50	11.50	CX34-18/24	SL280UH090V36B	5548935
13ACX-030-230	TXV	28,400	13.00	11.00	CX34-18/24	SL280UH090V48B	5548936
13ACX-030-230	TXV	28,400	13.00	11.00	CX34-18/24	SL280UH090XV48B	5548937
13ACX-030-230	TXV	28,000	13.50	11.50	CX34-18/24	SLP98UH070XV36B	5548938
13ACX-030-230	TXV	28,000	13.50	11.50	CX34-18/24	SLP98UH090XV36C	5548939
13ACX-030-230	TXV	28,400	13.00	11.00	CX34-19		5548948
13ACX-030-230	TXV	28,800	14.00	12.00	CX34-19	EL180UH045E36A	5733866
13ACX-030-230	TXV	28,800	14.00	12.00	CX34-19	EL180UH045XE36A	5734148
13ACX-030-230	TXV	28,800	14.50	12.00	CX34-19	SL280UH070V36A	5548951
13ACX-030-230	TXV	28,800	14.50	12.00	CX34-19	SL280UH070XV36A	5548952
13ACX-030-230	TXV	28,800	13.50	11.00	CX34-25		5548956
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-25	EL180UH045E36A	5733867
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-25	EL180UH045XE36A	5734149
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-25	EL195UH045XE36B	5548958
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-25	EL195UH070XE36B	5548959
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-25	EL296UH045XE36B	5649072
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-25	EL296UH045XV36B	5548960
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-25	EL296UH070XE36B	5649073
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-25	EL296UH070XV36B	5548961
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-25	SL280UH070V36A	5548955
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-25	SL280UH070XV36A	5548957
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-25	SL280UH090V36B	5548962
13ACX-030-230	TXV	29,600	14.50	12.00	CX34-25	SL280UH090V48B	5548963
13ACX-030-230	TXV	29,600	14.50	12.00	CX34-25	SL280UH090XV48B	5548964
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-25	SLP98UH070XV36B	5548965
13ACX-030-230	TXV	28,200	13.00	11.00	CX34-30		5548968
13ACX-030-230	TXV	28,400	14.00	11.50	CX34-30	EL180UH045E36A	5733868
13ACX-030-230	TXV	28,400	14.00	11.50	CX34-30	EL180UH045XE36A	5734150
13ACX-030-230	TXV	28,400	14.00	12.00	CX34-30	EL180UH070E36B	5734542
13ACX-030-230	TXV	28,400	14.00	12.00	CX34-30	EL180UH070XE36B	5734880
13ACX-030-230	TXV	28,400	14.00	12.00	CX34-30	EL180UH090E48B	5735695
13ACX-030-230	TXV	28,400	14.00	12.00	CX34-30	EL180UH090XE48B	5737569
13ACX-030-230	TXV	28,400	13.50	11.50	CX34-30	EL195UH045XE36B	5548978
13ACX-030-230	TXV	28,600	13.50	11.50	CX34-30	EL195UH070XE36B	5548979
13ACX-030-230	TXV	28,800	14.00	12.00	CX34-30	EL195UH090XE48C	5548984
13ACX-030-230	TXV	28,400	13.50	11.50	CX34-30	EL296UH045XE36B	5649074
13ACX-030-230	TXV	28,600	14.00	11.50	CX34-30	EL296UH045XV36B	5548969
13ACX-030-230	TXV	28,600	13.50	11.50	CX34-30	EL296UH070XE36B	5649075
13ACX-030-230	TXV	28,600	14.00	12.00	CX34-30	EL296UH070XV36B	5548970
13ACX-030-230	TXV	28,800	14.00	12.00	CX34-30	EL296UH090XE48C	5649076
13ACX-030-230	TXV	28,600	14.00	12.00	CX34-30	EL296UH090XV36C	5548985
13ACX-030-230	TXV	28,800	14.00	12.00	CX34-30	SL280UH070V36A	5548971
13ACX-030-230	TXV	28,800	14.00	12.00	CX34-30	SL280UH070XV36A	5548972

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	28,800	14.00	12.00	CX34-30	SL280UH090V36B	5548973
13ACX-030-230	TXV	29,000	14.00	11.70	CX34-30	SL280UH090V48B	5548974
13ACX-030-230	TXV	29,000	14.00	11.70	CX34-30	SL280UH090XV48B	5548975
13ACX-030-230	TXV	28,600	14.00	11.50	CX34-30	SLP98UH070XV36B	5548976
13ACX-030-230	TXV	28,600	14.00	12.00	CX34-30	SLP98UH090XV36C	5548977
13ACX-030-230	TXV	29,200	13.50	11.00	CX34-31		5548990
13ACX-030-230	TXV	29,800	14.50	12.00	CX34-31	EL180UH045E36A	6679355
13ACX-030-230	TXV	29,800	14.50	12.00	CX34-31	EL180UH045XE36A	6679356
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	EL180UH070E36B	5734543
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	EL180UH070XE36B	5734881
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	EL180UH090E48B	5735697
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	EL180UH090XE48B	5737571
13ACX-030-230	TXV	29,800	14.50	12.00	CX34-31	EL195UH045XE36B	5548991
13ACX-030-230	TXV	30,000	14.50	12.00	CX34-31	EL195UH070XE36B	5548992
13ACX-030-230	TXV	29,800	14.50	12.00	CX34-31	EL296UH045XE36B	5649077
13ACX-030-230	TXV	29,600	14.50	12.00	CX34-31	EL296UH045XV36B	5548993
13ACX-030-230	TXV	30,000	14.50	12.00	CX34-31	EL296UH070XE36B	5649078
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	EL296UH070XV36B	5548994
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	SL280UH070V36A	5548988
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	SL280UH070XV36A	5548989
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-31	SL280UH090V36B	5548999
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-31	SL280UH090V48B	5549000
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-31	SL280UH090XV48B	5549001
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-31	SLP98UH070XV36B	5549002
13ACX-030-230	TXV	28,600	13.00	11.00	CX34-36		5549003
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-36	EL180UH045E36A	5733869
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-36	EL180UH045XE36A	5734151
13ACX-030-230	TXV	29,200	15.00	12.50	CX34-36	EL180UH070E36B	5734544
13ACX-030-230	TXV	29,200	15.00	12.50	CX34-36	EL180UH070XE36B	5734882
13ACX-030-230	TXV	29,400	15.00	12.50	CX34-36	EL180UH090E48B	5735698
13ACX-030-230	TXV	29,400	15.00	12.50	CX34-36	EL180UH090XE48B	5737572
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-36	EL195UH045XE36B	5549008
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-36	EL195UH070XE36B	5549009
13ACX-030-230	TXV	29,000	14.50	12.00	CX34-36	EL195UH090XE48C	5549021
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-36	EL296UH045XE36B	5649079
13ACX-030-230	TXV	29,000	14.50	12.00	CX34-36	EL296UH045XV36B	5549014
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-36	EL296UH070XE36B	5649080
13ACX-030-230	TXV	29,000	14.50	12.00	CX34-36	EL296UH070XV36B	5549015
13ACX-030-230	TXV	29,000	14.50	12.00	CX34-36	EL296UH090XE48C	5649081
13ACX-030-230	TXV	29,200	15.00	12.50	CX34-36	EL296UH090XV36C	5549022
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-36	SL280UH070V36A	5549006
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-36	SL280UH070XV36A	5549007
13ACX-030-230	TXV	29,400	15.00	12.50	CX34-36	SL280UH090V36B	5549016
13ACX-030-230	TXV	29,600	14.50	12.20	CX34-36	SL280UH090V48B	5549017
13ACX-030-230	TXV	29,600	14.50	12.20	CX34-36	SL280UH090XV48B	5549018
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-36	SLP98UH070XV36B	5549019
13ACX-030-230	TXV	29,200	15.00	12.50	CX34-36	SLP98UH090XV36C	5549020
13ACX-030-230	TXV	29,400	13.50	11.50	CX34-38		5549027
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-38	EL180UH045E36A	5733870

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-38	EL180UH045XE36A	5734152
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-38	EL180UH070E36B	5734545
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-38	EL180UH070XE36B	5734883
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-38	EL180UH090E48B	5735700
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-38	EL180UH090XE48B	5737574
13ACX-030-230	TXV	30,000	15.00	12.00	CX34-38	EL195UH045XE36B	5549028
13ACX-030-230	TXV	30,200	15.00	12.00	CX34-38	EL195UH070XE36B	5549029
13ACX-030-230	TXV	30,000	15.00	12.00	CX34-38	EL296UH045XE36B	5649082
13ACX-030-230	TXV	29,800	15.00	12.00	CX34-38	EL296UH045XV36B	5549030
13ACX-030-230	TXV	30,200	15.00	12.00	CX34-38	EL296UH070XE36B	5649083
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-38	EL296UH070XV36B	5549031
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-38	SL280UH070V36A	5549025
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-38	SL280UH070XV36A	5549026
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-38	SL280UH090V36B	5549036
13ACX-030-230	TXV	30,200	15.00	12.50	CX34-38	SL280UH090V48B	5549037
13ACX-030-230	TXV	30,200	15.00	12.50	CX34-38	SL280UH090XV48B	5549038
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-38	SLP98UH070XV36B	5549039
13ACX-030-230	TXV	28,600	13.00	11.00	CX34-42		5549040
13ACX-030-230	TXV	29,200	15.00	12.50	CX34-42	EL180UH070E36B	5734546
13ACX-030-230	TXV	29,200	15.00	12.50	CX34-42	EL180UH070XE36B	5734884
13ACX-030-230	TXV	29,400	15.00	12.50	CX34-42	EL180UH090E48B	5735702
13ACX-030-230	TXV	29,400	15.00	12.50	CX34-42	EL180UH090XE48B	5737576
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-42	EL195UH045XE36B	5549041
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-42	EL195UH070XE36B	5549042
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-42	EL296UH045XE36B	5649084
13ACX-030-230	TXV	29,000	14.50	12.00	CX34-42	EL296UH045XV36B	5549043
13ACX-030-230	TXV	29,400	14.50	12.00	CX34-42	EL296UH070XE36B	5649085
13ACX-030-230	TXV	29,000	14.50	12.00	CX34-42	EL296UH070XV36B	5549044
13ACX-030-230	TXV	29,400	15.00	12.50	CX34-42	SL280UH090V36B	5549049
13ACX-030-230	TXV	29,600	14.50	12.20	CX34-42	SL280UH090V48B	5549050
13ACX-030-230	TXV	29,600	14.50	12.20	CX34-42	SL280UH090XV48B	5549051
13ACX-030-230	TXV	29,200	14.50	12.00	CX34-42	SLP98UH070XV36B	5549052
13ACX-030-230	TXV	29,600	13.50	11.50	CX34-43		5549065
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-43	EL180UH070E36B	5734547
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-43	EL180UH070XE36B	5734885
13ACX-030-230	TXV	30,400	15.50	12.50	CX34-43	EL180UH090E48B	5735705
13ACX-030-230	TXV	30,400	15.50	12.50	CX34-43	EL180UH090XE48B	5737578
13ACX-030-230	TXV	30,200	15.00	12.50	CX34-43	EL195UH045XE36B	5549053
13ACX-030-230	TXV	30,400	15.00	12.50	CX34-43	EL195UH070XE36B	5549054
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-43	EL195UH090XE48C	5549066
13ACX-030-230	TXV	30,200	15.00	12.50	CX34-43	EL296UH045XE36B	5649086
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-43	EL296UH045XV36B	5549055
13ACX-030-230	TXV	30,400	15.00	12.50	CX34-43	EL296UH070XE36B	5649087
13ACX-030-230	TXV	30,000	15.00	12.50	CX34-43	EL296UH070XV36B	5549056
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-43	EL296UH090XE48C	5649088
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-43	EL296UH090XV36C	5549068
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-43	SL280UH090V36B	5549061
13ACX-030-230	TXV	30,400	15.00	12.50	CX34-43	SL280UH090V48B	5549062
13ACX-030-230	TXV	30,400	15.00	12.50	CX34-43	SL280UH090XV48B	5549063

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-030-230	TXV	30,200	15.00	12.50	CX34-43	SLP98UH070XV36B	5549064
13ACX-030-230	TXV	30,200	15.50	12.50	CX34-43	SLP98UH090XV36C	5549067
13ACX-030-230	TXV	29,200	13.50	11.00	CX34-44/48		5549069
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-44/48	EL195UH090XE48C	5549070
13ACX-030-230	TXV	29,800	15.00	12.50	CX34-44/48	EL296UH090XE48C	5649089
13ACX-030-230	TXV	29,600	15.00	12.50	CX34-44/48	EL296UH090XV36C	5549072
13ACX-030-230	TXV	29,600	15.00	12.50	CX34-44/48	SLP98UH090XV36C	5549071
13ACX-036-230	RFC	35,000	13.00	10.70	C33-38		5697160
13ACX-036-230	RFC	35,400	13.00	11.00	C33-43		5697171
13ACX-036-230	RFC	35,200	13.00	11.00	C33-50/60C		5697218
13ACX-036-230	RFC	35,800	13.00	11.00	CH33-43		5697249
13ACX-036-230	RFC	35,000	13.00	10.50	CH33-44/48		5697275
13ACX-036-230	RFC	35,000	13.00	10.50	CR33-50/60		5697311
13ACX-036-230	TXV	35,200	13.00	11.00	C33-31	EL180UH045E36A	5733961
13ACX-036-230	TXV	35,200	13.00	11.00	C33-31	EL180UH045XE36A	5734242
13ACX-036-230	TXV	35,000	14.00	11.00	C33-31	EL180UH070E36B	5734624
13ACX-036-230	TXV	35,000	14.00	11.00	C33-31	EL180UH070XE36B	5734961
13ACX-036-230	TXV	35,200	14.00	11.00	C33-31	EL180UH090E48B	5735808
13ACX-036-230	TXV	35,200	14.00	11.00	C33-31	EL180UH090XE48B	5737664
13ACX-036-230	TXV	35,000	13.00	11.00	C33-31	EL195UH045XE36B	5697146
13ACX-036-230	TXV	34,800	13.00	11.00	C33-31	EL195UH070XE36B	5697147
13ACX-036-230	TXV	34,800	13.00	11.00	C33-31	EL296UH045XV36B	5697148
13ACX-036-230	TXV	35,000	13.00	11.00	C33-31	EL296UH070XV36B	5697149
13ACX-036-230	TXV	35,000	13.00	11.00	C33-31	SL280UH070V36A	5697144
13ACX-036-230	TXV	35,000	13.00	11.00	C33-31	SL280UH070XV36A	5697145
13ACX-036-230	TXV	35,200	14.00	11.00	C33-31	SL280UH090V36B	5697154
13ACX-036-230	TXV	35,200	14.00	11.00	C33-31	SL280UH090V48B	5697155
13ACX-036-230	TXV	35,200	14.00	11.00	C33-31	SL280UH090XV48B	5697156
13ACX-036-230	TXV	35,000	13.00	11.00	C33-31	SLP98UH070XV36B	5699579
13ACX-036-230	TXV	35,000	13.00	10.70	C33-38		5697384
13ACX-036-230	TXV	35,600	14.00	11.00	C33-38	EL180UH045E36A	5733963
13ACX-036-230	TXV	35,600	14.00	11.00	C33-38	EL180UH045XE36A	5734244
13ACX-036-230	TXV	35,600	14.50	12.00	C33-38	EL180UH070E36B	5734625
13ACX-036-230	TXV	35,600	14.50	12.00	C33-38	EL180UH070XE36B	5734963
13ACX-036-230	TXV	35,800	14.00	11.00	C33-38	EL180UH090E48B	5735811
13ACX-036-230	TXV	35,800	14.00	11.00	C33-38	EL180UH090XE48B	5737666
13ACX-036-230	TXV	35,400	14.00	11.00	C33-38	EL195UH070XE36B	5697161
13ACX-036-230	TXV	35,200	14.00	11.00	C33-38	EL296UH045XV36B	5697162
13ACX-036-230	TXV	35,400	14.00	11.00	C33-38	EL296UH070XV36B	5697163
13ACX-036-230	TXV	35,200	14.00	11.00	C33-38	SL280UH070V36A	5697158
13ACX-036-230	TXV	35,200	14.00	11.00	C33-38	SL280UH070XV36A	5697159
13ACX-036-230	TXV	35,600	14.00	11.00	C33-38	SL280UH090V36B	5697168
13ACX-036-230	TXV	35,600	14.00	11.00	C33-38	SL280UH090V48B	5697169
13ACX-036-230	TXV	35,600	14.00	11.00	C33-38	SL280UH090XV48B	5697170
13ACX-036-230	TXV	35,000	13.00	11.00	C33-38	SLP98UH070XV36B	5697157
13ACX-036-230	TXV	35,400	13.00	11.00	C33-43		5697385
13ACX-036-230	TXV	35,800	14.50	12.00	C33-43	EL180UH070E36B	5734626
13ACX-036-230	TXV	35,800	14.50	12.00	C33-43	EL180UH070XE36B	5734965
13ACX-036-230	TXV	36,000	14.00	11.00	C33-43	EL180UH090E48B	5735813

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	36,000	14.50	12.00	C33-43	EL180UH090E60C	5736930
13ACX-036-230	TXV	36,000	14.00	11.00	C33-43	EL180UH090XE48B	5737667
13ACX-036-230	TXV	35,800	14.50	12.00	C33-43	EL180UH110E60C	5738711
13ACX-036-230	TXV	35,800	14.50	12.00	C33-43	EL180UH110XE60C	5739547
13ACX-036-230	TXV	35,600	14.00	11.00	C33-43	EL195UH070XE36B	5697172
13ACX-036-230	TXV	35,800	14.00	11.00	C33-43	EL195UH090XE48C	5697182
13ACX-036-230	TXV	36,000	14.00	11.00	C33-43	EL195UH110XE60C	5697183
13ACX-036-230	TXV	35,600	14.00	11.00	C33-43	EL296UH070XE36B	5697389
13ACX-036-230	TXV	35,600	14.00	11.00	C33-43	EL296UH070XV36B	5697173
13ACX-036-230	TXV	35,800	14.00	11.00	C33-43	EL296UH090XE48C	5697390
13ACX-036-230	TXV	35,800	14.00	11.00	C33-43	EL296UH090XV36C	5697184
13ACX-036-230	TXV	35,800	14.00	11.00	C33-43	EL296UH090XV48C	5697185
13ACX-036-230	TXV	36,000	14.00	11.00	C33-43	EL296UH110XE60C	5697391
13ACX-036-230	TXV	35,800	14.50	12.00	C33-43	SL280UH090V36B	5697178
13ACX-036-230	TXV	36,000	14.50	12.00	C33-43	SL280UH090V48B	5697179
13ACX-036-230	TXV	36,400	14.25	11.70	C33-43	SL280UH090V60C	5697188
13ACX-036-230	TXV	36,000	14.50	12.00	C33-43	SL280UH090XV48B	5697180
13ACX-036-230	TXV	36,400	14.50	12.00	C33-43	SL280UH090XV60C	5697191
13ACX-036-230	TXV	36,200	14.00	11.00	C33-43	SL280UH110V60C	5697189
13ACX-036-230	TXV	36,200	14.00	11.00	C33-43	SL280UH110XV60C	5697192
13ACX-036-230	TXV	35,600	14.00	11.00	C33-43	SLP98UH070XV36B	5697181
13ACX-036-230	TXV	35,800	14.00	11.00	C33-43	SLP98UH090XV36C	5697193
13ACX-036-230	TXV	35,800	14.00	11.00	C33-43	SLP98UH090XV48C	5697194
13ACX-036-230	TXV	36,200	14.50	12.00	C33-43	SLP98UH110XV60C	5697195
13ACX-036-230	TXV	34,800	13.00	10.50	C33-48		6623437
13ACX-036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH070E36B	5734627
13ACX-036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH070XE36B	5734967
13ACX-036-230	TXV	35,600	14.00	11.00	C33-48B	EL180UH090E48B	5735815
13ACX-036-230	TXV	35,600	14.00	11.00	C33-48B	EL180UH090E60C	5736934
13ACX-036-230	TXV	35,600	14.00	11.00	C33-48B	EL180UH090XE48B	5737669
13ACX-036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH110E60C	5738713
13ACX-036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH110XE60C	5739550
13ACX-036-230	TXV	35,400	14.00	11.00	C33-48B	EL195UH090XE48C	5697204
13ACX-036-230	TXV	35,600	14.00	11.00	C33-48B	EL195UH110XE60C	5697205
13ACX-036-230	TXV	35,400	14.00	11.00	C33-48B	EL296UH090XV36C	5697206
13ACX-036-230	TXV	35,200	14.00	11.00	C33-48B	EL296UH090XV48C	5697207
13ACX-036-230	TXV	35,200	14.00	11.00	C33-48B	SL280UH090V36B	5697201
13ACX-036-230	TXV	35,400	14.00	11.00	C33-48B	SL280UH090V48B	5697202
13ACX-036-230	TXV	35,800	14.00	11.00	C33-48B	SL280UH090V60C	5697210
13ACX-036-230	TXV	35,400	14.00	11.00	C33-48B	SL280UH090XV48B	5697203
13ACX-036-230	TXV	35,800	14.00	11.00	C33-48B	SL280UH090XV60C	5697213
13ACX-036-230	TXV	35,600	13.00	11.00	C33-48B	SL280UH110V60C	5697211
13ACX-036-230	TXV	35,600	13.00	11.00	C33-48B	SL280UH110XV60C	5697214
13ACX-036-230	TXV	35,400	14.00	11.00	C33-48B	SLP98UH090XV36C	5697215
13ACX-036-230	TXV	35,200	14.00	11.00	C33-48B	SLP98UH090XV48C	5697216
13ACX-036-230	TXV	35,600	14.00	11.00	C33-48B	SLP98UH110XV60C	5697217
13ACX-036-230	TXV	35,200	13.00	11.00	C33-50/60C		5697386
13ACX-036-230	TXV	36,000	14.50	12.00	C33-50/60C	EL180UH090E60C	5736936
13ACX-036-230	TXV	35,600	14.00	11.00	C33-50/60C	EL180UH110E60C	5738714

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	35,600	14.00	11.00	C33-50/60C	EL180UH110XE60C	5739552
13ACX-036-230	TXV	35,800	14.00	11.00	C33-50/60C	EL195UH090XE48C	5697219
13ACX-036-230	TXV	36,000	14.00	11.00	C33-50/60C	EL195UH110XE60C	5697220
13ACX-036-230	TXV	35,800	14.00	11.00	C33-50/60C	EL296UH090XE48C	5697392
13ACX-036-230	TXV	35,800	14.00	11.00	C33-50/60C	EL296UH090XV36C	5697221
13ACX-036-230	TXV	35,600	14.00	11.00	C33-50/60C	EL296UH090XV48C	5697222
13ACX-036-230	TXV	36,000	14.00	11.00	C33-50/60C	EL296UH110XE60C	5697393
13ACX-036-230	TXV	36,200	14.25	11.70	C33-50/60C	SL280UH090V60C	5697225
13ACX-036-230	TXV	36,200	14.25	11.70	C33-50/60C	SL280UH090XV60C	5697228
13ACX-036-230	TXV	36,000	14.00	11.00	C33-50/60C	SL280UH110V60C	5697226
13ACX-036-230	TXV	36,000	14.00	11.00	C33-50/60C	SL280UH110XV60C	5697229
13ACX-036-230	TXV	35,800	14.00	11.00	C33-50/60C	SLP98UH090XV36C	5697230
13ACX-036-230	TXV	35,600	14.00	11.00	C33-50/60C	SLP98UH090XV48C	5697231
13ACX-036-230	TXV	36,000	14.00	11.00	C33-50/60C	SLP98UH110XV60C	5697232
13ACX-036-230	TXV	35,200	13.00	11.00	CBX25UH-042		5732779
13ACX-036-230	TXV	35,000	13.00	11.00	CBX25UHV-036		6970119
13ACX-036-230	TXV	36,000	14.50	12.20	CBX25UHV-042		6970120
13ACX-036-230	TXV	35,000	13.00	11.00	CBX27UH-036		5697233
13ACX-036-230	TXV	36,000	14.50	12.00	CBX27UH-042		5697234
13ACX-036-230	TXV	34,000	13.00	11.00	CBX32M-030		5697235
13ACX-036-230	TXV	34,400	13.00	11.00	CBX32M-036		5697236
13ACX-036-230	TXV	34,400	13.00	11.00	CBX32M-042		5697237
13ACX-036-230	TXV	35,400	13.00	11.00	CBX32M-048		5697238
13ACX-036-230	TXV	34,600	13.00	11.00	CBX32MV-036		5697239
13ACX-036-230	TXV	36,000	14.50	12.00	CBX32MV-048		5697240
13ACX-036-230	TXV	34,800	13.00	11.00	CBX40UHV-036		5697241
13ACX-036-230	TXV	35,600	13.00	11.00	CBX40UHV-042		5697242
13ACX-036-230	TXV	35,800	14.00	11.00	CBX40UHV-048		5697243
13ACX-036-230	TXV	34,800	14.00	11.00	CH23-41	EL180UH070E36B	5734630
13ACX-036-230	TXV	35,200	13.00	11.00	CH23-41	EL180UH090E48B	5735821
13ACX-036-230	TXV	34,800	14.00	11.00	CH23-51	EL180UH070E36B	5734632
13ACX-036-230	TXV	35,200	14.00	11.00	CH23-51	EL180UH090E48B	5735823
13ACX-036-230	TXV	34,800	13.00	11.00	CH23-51	EL296UH045XV36B	5697246
13ACX-036-230	TXV	35,800	13.00	11.00	CH33-43		5697387
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-43B	EL180UH070E36B	5734633
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-43B	EL180UH070XE36B	5734973
13ACX-036-230	TXV	36,200	14.50	12.00	CH33-43B	EL180UH090E48B	5735824
13ACX-036-230	TXV	36,200	14.50	12.00	CH33-43B	EL180UH090XE48B	5737676
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43B	EL195UH070XE36B	5697250
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43B	EL296UH070XE36B	5697394
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43B	EL296UH070XV36B	5697252
13ACX-036-230	TXV	35,800	14.00	11.00	CH33-43B	EL296UH090XV36C	5697251
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-43B	SL280UH090V36B	5697257
13ACX-036-230	TXV	36,400	14.50	12.00	CH33-43B	SL280UH090V48B	5697258
13ACX-036-230	TXV	36,400	14.50	12.00	CH33-43B	SL280UH090XV48B	5697259
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43B	SLP98UH070XV36B	5697260
13ACX-036-230	TXV	36,200	14.50	12.00	CH33-43C	EL180UH090E60C	5736938
13ACX-036-230	TXV	35,800	14.50	12.00	CH33-43C	EL180UH110E60C	5738716
13ACX-036-230	TXV	35,800	14.50	12.00	CH33-43C	EL180UH110XE60C	5739555

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43C	EL195UH090XE48C	5697261
13ACX-036-230	TXV	36,200	14.50	12.00	CH33-43C	EL195UH110XE60C	5697262
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43C	EL296UH090XE48C	5697395
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43C	EL296UH090XV36C	5697263
13ACX-036-230	TXV	35,800	14.50	12.00	CH33-43C	EL296UH090XV48C	5697264
13ACX-036-230	TXV	36,200	14.50	12.00	CH33-43C	EL296UH110XE60C	5697396
13ACX-036-230	TXV	36,400	14.25	11.70	CH33-43C	SL280UH090V60C	5697267
13ACX-036-230	TXV	36,400	14.25	11.70	CH33-43C	SL280UH090XV60C	5697270
13ACX-036-230	TXV	36,200	14.00	11.00	CH33-43C	SL280UH110V60C	5697268
13ACX-036-230	TXV	36,200	14.00	11.00	CH33-43C	SL280UH110XV60C	5697271
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-43C	SLP98UH090XV36C	5697272
13ACX-036-230	TXV	35,800	14.50	12.00	CH33-43C	SLP98UH090XV48C	5697273
13ACX-036-230	TXV	36,200	14.50	12.00	CH33-43C	SLP98UH110XV60C	5697274
13ACX-036-230	TXV	35,000	13.00	10.50	CH33-44/48		5697388
13ACX-036-230	TXV	35,400	14.00	11.00	CH33-44/48	EL180UH070E36B	5734634
13ACX-036-230	TXV	35,400	14.00	11.00	CH33-44/48	EL180UH070XE36B	5734975
13ACX-036-230	TXV	35,400	14.00	11.00	CH33-44/48	EL180UH090E48B	5735826
13ACX-036-230	TXV	35,400	14.00	11.00	CH33-44/48	EL180UH090XE48B	5737677
13ACX-036-230	TXV	35,600	14.00	11.00	CH33-44/48	SL280UH090V36B	5697280
13ACX-036-230	TXV	35,600	14.00	11.00	CH33-44/48	SL280UH090V48B	5697281
13ACX-036-230	TXV	35,600	14.00	11.00	CH33-44/48	SL280UH090XV48B	5697282
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-48	EL180UH090E60C	5736940
13ACX-036-230	TXV	35,800	14.50	12.00	CH33-48	EL180UH110E60C	5738719
13ACX-036-230	TXV	35,800	14.50	12.00	CH33-48	EL180UH110XE60C	5795904
13ACX-036-230	TXV	35,800	14.00	11.00	CH33-48	EL296UH090XV36C	5697285
13ACX-036-230	TXV	35,600	14.00	11.00	CH33-48	EL296UH090XV48C	5697286
13ACX-036-230	TXV	36,200	14.25	11.70	CH33-48	SL280UH090V60C	5697289
13ACX-036-230	TXV	36,600	14.25	11.70	CH33-48	SL280UH090XV60C	5697305
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-48	SL280UH110V60C	5697290
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-48	SL280UH110XV60C	5697292
13ACX-036-230	TXV	35,800	14.00	11.00	CH33-48	SLP98UH090XV36C	5697293
13ACX-036-230	TXV	35,600	14.00	11.00	CH33-48	SLP98UH090XV48C	5697294
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-48	SLP98UH110XV60C	5697295
13ACX-036-230	TXV	35,800	14.00	11.00	CH33-48C	EL195UH090XE48C	5697283
13ACX-036-230	TXV	36,000	14.00	11.00	CH33-48C	EL195UH110XE60C	5697284
13ACX-036-230	TXV	36,400	14.00	11.00	CH33-48C	SL280UH110XV60C	5699581
13ACX-036-230	TXV	36,200	14.00	11.00	CH33-48C	SLP98UH090XV36C	5699582
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-48C	SLP98UH090XV48C	5699583
13ACX-036-230	TXV	36,400	14.50	12.00	CH33-48C	SLP98UH110XV60C	5699584
13ACX-036-230	TXV	35,600	13.00	11.00	CH33-50/60C		5697405
13ACX-036-230	TXV	35,600	13.00	11.00	CH33-50/60C		5699580
13ACX-036-230	TXV	36,400	14.50	12.00	CH33-50/60C	EL180UH090E60C	5736932
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-50/60C	EL180UH110E60C	5795862
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-50/60C	EL180UH110XE60C	5739548
13ACX-036-230	TXV	36,200	14.00	11.00	CH33-50/60C	EL195UH090XE48C	5697296
13ACX-036-230	TXV	36,400	14.50	12.00	CH33-50/60C	EL195UH110XE60C	5697297
13ACX-036-230	TXV	36,200	14.00	12.00	CH33-50/60C	EL296UH090XV36C	5697298
13ACX-036-230	TXV	36,000	14.50	12.00	CH33-50/60C	EL296UH090XV48C	5697299
13ACX-036-230	TXV	36,600	14.25	12.00	CH33-50/60C	SL280UH090V60C	5697302

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	36,400	14.00	11.00	CH33-50/60C	SL280UH110V60C	5697303
13ACX-036-230	TXV	36,000	13.00	11.00	CH35-42B		7164290
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH070E36B	7164297
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH070XE36B	7164298
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH090E48B	7164299
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH090XE48B	7164300
13ACX-036-230	TXV	36,000	13.00	11.00	CH35-42B	EL195UH045XE36B	7164291
13ACX-036-230	TXV	36,000	14.00	11.50	CH35-42B	EL195UH070XE36B	7164292
13ACX-036-230	TXV	36,000	13.00	11.00	CH35-42B	EL296UH045XE36B	7164294
13ACX-036-230	TXV	35,800	14.00	11.50	CH35-42B	EL296UH045XV36B	7164293
13ACX-036-230	TXV	36,000	14.00	11.50	CH35-42B	EL296UH070XE36B	7164296
13ACX-036-230	TXV	36,000	14.00	11.50	CH35-42B	EL296UH070XV36B	7164295
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42B	SL280UH090V36B	7164301
13ACX-036-230	TXV	36,000	14.50	12.20	CH35-42B	SL280UH090V48B	7164302
13ACX-036-230	TXV	36,000	14.50	12.20	CH35-42B	SL280UH090XV48B	7164303
13ACX-036-230	TXV	36,000	14.25	11.50	CH35-42B	SLP98UH070XV36B	7164304
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42C	EL180UH090E60C	7164311
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42C	EL180UH110E60C	7164312
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42C	EL180UH110XE60C	7164313
13ACX-036-230	TXV	36,000	14.25	11.50	CH35-42C	EL195UH090XE48C	7164305
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42C	EL195UH110XE60C	7164306
13ACX-036-230	TXV	36,000	14.25	11.50	CH35-42C	EL296UH090XE48C	7164309
13ACX-036-230	TXV	36,000	14.25	11.50	CH35-42C	EL296UH090XV36C	7164307
13ACX-036-230	TXV	35,800	14.50	11.50	CH35-42C	EL296UH090XV48C	7164308
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42C	EL296UH110XE60C	7164310
13ACX-036-230	TXV	36,000	14.25	11.70	CH35-42C	SL280UH090V60C	7164314
13ACX-036-230	TXV	36,000	14.25	11.70	CH35-42C	SL280UH090XV60C	7164315
13ACX-036-230	TXV	36,000	14.00	11.50	CH35-42C	SL280UH110V60C	7164316
13ACX-036-230	TXV	36,000	14.00	11.50	CH35-42C	SL280UH110XV60C	7164317
13ACX-036-230	TXV	36,000	14.25	11.50	CH35-42C	SLP98UH090XV36C	7164318
13ACX-036-230	TXV	35,800	14.50	11.50	CH35-42C	SLP98UH090XV48C	7164319
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-42C	SLP98UH110XV60C	7164320
13ACX-036-230	TXV	35,200	13.00	11.00	CH35-48B		7164321
13ACX-036-230	TXV	35,600	14.25	11.50	CH35-48B	EL180UH070E36B	7164328
13ACX-036-230	TXV	35,600	14.25	11.50	CH35-48B	EL180UH070XE36B	7164329
13ACX-036-230	TXV	35,600	14.00	11.50	CH35-48B	EL180UH090E48B	7164330
13ACX-036-230	TXV	35,600	14.00	11.50	CH35-48B	EL180UH090XE48B	7164331
13ACX-036-230	TXV	35,400	13.00	11.00	CH35-48B	EL195UH045XE36B	7164322
13ACX-036-230	TXV	35,400	13.00	11.50	CH35-48B	EL195UH070XE36B	7164324
13ACX-036-230	TXV	35,400	13.00	11.00	CH35-48B	EL296UH045XE36B	7164323
13ACX-036-230	TXV	35,400	13.00	11.50	CH35-48B	EL296UH045XV36B	7164326
13ACX-036-230	TXV	35,400	13.00	11.50	CH35-48B	EL296UH070XE36B	7164325
13ACX-036-230	TXV	35,400	13.00	11.50	CH35-48B	EL296UH070XV36B	7164327
13ACX-036-230	TXV	35,800	14.25	12.00	CH35-48B	SL280UH090V36B	7164332
13ACX-036-230	TXV	35,800	14.00	11.50	CH35-48B	SL280UH090V48B	7164333
13ACX-036-230	TXV	35,800	14.00	11.50	CH35-48B	SL280UH090XV48B	7164334
13ACX-036-230	TXV	35,400	13.00	11.50	CH35-48B	SLP98UH070XV36B	7164335
13ACX-036-230	TXV	35,400	13.00	11.00	CH35-48C		7164336

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-48C	EL180UH090E60C	7164343
13ACX-036-230	TXV	35,800	14.50	12.00	CH35-48C	EL180UH110E60C	7164344
13ACX-036-230	TXV	35,800	14.50	12.00	CH35-48C	EL180UH110XE60C	7164345
13ACX-036-230	TXV	35,800	14.25	11.50	CH35-48C	EL195UH090XE48C	7164337
13ACX-036-230	TXV	36,000	14.25	12.00	CH35-48C	EL195UH110XE60C	7164338
13ACX-036-230	TXV	35,800	14.25	11.50	CH35-48C	EL296UH090XE48C	7164341
13ACX-036-230	TXV	36,000	14.25	11.50	CH35-48C	EL296UH090XV36C	7164339
13ACX-036-230	TXV	35,800	14.25	12.00	CH35-48C	EL296UH090XV48C	7164340
13ACX-036-230	TXV	36,000	14.25	12.00	CH35-48C	EL296UH110XE60C	7164342
13ACX-036-230	TXV	36,000	14.50	11.70	CH35-48C	SL280UH090V60C	7164346
13ACX-036-230	TXV	36,000	14.50	11.70	CH35-48C	SL280UH090XV60C	7164347
13ACX-036-230	TXV	36,000	14.00	11.50	CH35-48C	SL280UH110V60C	7164348
13ACX-036-230	TXV	36,000	14.00	11.50	CH35-48C	SL280UH110XV60C	7164349
13ACX-036-230	TXV	36,000	14.25	11.50	CH35-48C	SLP98UH090XV36C	7164350
13ACX-036-230	TXV	35,800	14.25	12.00	CH35-48C	SLP98UH090XV48C	7164351
13ACX-036-230	TXV	36,000	14.25	12.00	CH35-48C	SLP98UH110XV60C	7164352
13ACX-036-230	TXV	35,800	13.00	11.00	CH35-51C		7164353
13ACX-036-230	TXV	36,000	14.50	12.20	CH35-51C	EL180UH090E60C	7164360
13ACX-036-230	TXV	36,000	14.50	12.20	CH35-51C	EL180UH110E60C	7164361
13ACX-036-230	TXV	36,000	14.50	12.20	CH35-51C	EL180UH110XE60C	7164362
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	EL195UH090XE48C	7164354
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	EL195UH110XE60C	7164356
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH090XE48C	7164355
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH090XV36C	7164358
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH090XV48C	7164359
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH110XE60C	7164357
13ACX-036-230	TXV	36,000	14.50	12.20	CH35-51C	SL280UH090V60C	7164363
13ACX-036-230	TXV	36,000	14.50	12.20	CH35-51C	SL280UH090XV60C	7164364
13ACX-036-230	TXV	36,000	14.25	11.70	CH35-51C	SL280UH110V60C	7164365
13ACX-036-230	TXV	36,000	14.25	11.70	CH35-51C	SL280UH110XV60C	7164366
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	SLP98UH090XV36C	7164367
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	SLP98UH090XV48C	7164368
13ACX-036-230	TXV	36,000	14.50	12.00	CH35-51C	SLP98UH110XV60C	7164369
13ACX-036-230	TXV	35,200	14.00	11.00	CR33-48	EL180DF070E36B	5733449
13ACX-036-230	TXV	35,200	14.00	11.00	CR33-48	EL180DF090E48B	5733494
13ACX-036-230	TXV	35,600	14.00	11.00	CR33-48	EL180DF110E60C	5733572
13ACX-036-230	TXV	35,400	14.00	11.00	CR33-48	EL195DF110XE60C	5697309
13ACX-036-230	TXV	35,200	14.00	11.00	CR33-48	SL280DF090XV48B	5697308
13ACX-036-230	TXV	35,400	14.00	11.00	CR33-48	SL280DF110V60C	5697404
13ACX-036-230	TXV	36,000	14.00	11.00	CR33-50/60	EL180DF110E60C	5733573
13ACX-036-230	TXV	35,800	14.00	11.00	CR33-50/60	EL195DF090XE48C	5697312
13ACX-036-230	TXV	35,800	14.00	11.00	CR33-50/60	EL296DF090XE48C	5697397
13ACX-036-230	TXV	35,800	14.00	11.00	CR33-50/60	EL296DF090XV60C	5697313
13ACX-036-230	TXV	35,800	14.00	11.00	CR33-50/60	SL280DF110V60C	5697315
13ACX-036-230	TXV	35,800	14.00	11.00	CR33-50/60	SLP98DF090XV48C	5697316
13ACX-036-230	TXV	35,200	13.00	11.00	CX34-31	EL180UH045E36A	5733962
13ACX-036-230	TXV	35,200	13.00	11.00	CX34-31	EL180UH045XE36A	5734243
13ACX-036-230	TXV	35,000	14.00	11.00	CX34-31	EL180UH070E36B	5734628
13ACX-036-230	TXV	35,000	14.00	11.00	CX34-31	EL180UH070XE36B	5734969

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-31	EL180UH090E48B	5735817
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-31	EL180UH090XE48B	5737671
13ACX-036-230	TXV	35,000	13.00	11.00	CX34-31	EL195UH045XE36B	5697321
13ACX-036-230	TXV	34,800	13.00	11.00	CX34-31	EL195UH070XE36B	5697322
13ACX-036-230	TXV	34,800	13.00	11.00	CX34-31	EL296UH045XV36B	5697323
13ACX-036-230	TXV	35,000	13.00	11.00	CX34-31	EL296UH070XV36B	5697324
13ACX-036-230	TXV	35,000	13.00	11.00	CX34-31	SL280UH070V36A	5697319
13ACX-036-230	TXV	35,000	13.00	11.00	CX34-31	SL280UH070XV36A	5697320
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-31	SL280UH090V36B	5697329
13ACX-036-230	TXV	35,000	13.00	11.00	CX34-31	SLP98UH070XV36B	5697330
13ACX-036-230	TXV	35,000	13.00	10.70	CX34-38		5697335
13ACX-036-230	TXV	35,600	14.50	12.00	CX34-38	EL180UH070E36B	5734629
13ACX-036-230	TXV	35,600	14.50	12.00	CX34-38	EL180UH070XE36B	5734971
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-38	EL180UH090E48B	5735818
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-38	EL180UH090XE48B	5737673
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-38	EL195UH070XE36B	5699585
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-38	EL296UH045XV36B	5699586
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-38	EL296UH070XV36B	5699587
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-38	SL280UH070V36A	5697333
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-38	SL280UH070XV36A	5697334
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-38	SL280UH090V36B	5697340
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-38	SL280UH090V48B	5697341
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-38	SL280UH090XV48B	5697342
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-38	SLP98UH070XV36B	5697343
13ACX-036-230	TXV	35,400	13.00	11.00	CX34-43		5697344
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH070E36B	5734689
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH070E36B	7425511
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH070XE36B	5735059
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH070XE36B	7425519
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-43	EL180UH090E48B	5735928
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-43	EL180UH090E48B	7425521
13ACX-036-230	TXV	36,000	14.50	12.00	CX34-43	EL180UH090E60C	5737057
13ACX-036-230	TXV	36,000	14.50	12.00	CX34-43	EL180UH090E60C	7425513
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-43	EL180UH090XE48B	5737759
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-43	EL180UH090XE48B	7425517
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH110E60C	5738834
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH110E60C	7425515
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH110XE60C	5795906
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-43	EL195UH070XE36B	5699588
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-43	EL195UH070XE36B	7425508
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-43	EL195UH090XE48C	5697349
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-43	EL195UH110XE60C	5697350
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-43	EL296UH070XE36B	5697398
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-43	EL296UH070XV36B	5699589
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-43	EL296UH070XV36B	7425509
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-43	EL296UH090XE48C	5697399
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-43	EL296UH090XV36C	5697351
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-43	EL296UH090XV48C	5697352
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-43	EL296UH110XE60C	5697400

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	35,800	14.50	12.00	CX34-43	SL280UH090V36B	5697345
13ACX-036-230	TXV	36,000	14.50	12.00	CX34-43	SL280UH090V48B	5697346
13ACX-036-230	TXV	36,400	14.25	11.70	CX34-43	SL280UH090V60C	5697353
13ACX-036-230	TXV	33,600	13.50	12.00	CX34-43	SL280UH090XV48B	5697347
13ACX-036-230	TXV	36,400	14.25	11.70	CX34-43	SL280UH090XV60C	5697356
13ACX-036-230	TXV	36,200	14.00	11.00	CX34-43	SL280UH110V60C	5697354
13ACX-036-230	TXV	36,200	14.00	11.00	CX34-43	SL280UH110XV60C	5697357
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-43	SLP98UH070XV36B	5697348
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-43	SLP98UH090XV36C	5697358
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-43	SLP98UH090XV48C	5697359
13ACX-036-230	TXV	36,200	14.50	12.00	CX34-43	SLP98UH110XV60C	5697360
13ACX-036-230	TXV	34,800	13.00	10.50	CX34-44/48		5697361
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH070E36B	5734635
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH070XE36B	5734977
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL180UH090E48B	5735829
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL180UH090E60C	5736942
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL180UH090XE48B	5737680
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH110E60C	5738721
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH110XE60C	5739559
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-44/48	EL195UH090XE48C	5697369
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL195UH110XE60C	5697370
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-44/48	EL296UH090XV36C	5697371
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL296UH090XV48C	5697372
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-44/48	SL280UH090V36B	5697366
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-44/48	SL280UH090V48B	5697367
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-44/48	SL280UH090V60C	5697375
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-44/48	SL280UH090XV48B	5697368
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-44/48	SL280UH090XV60C	5697378
13ACX-036-230	TXV	35,600	13.00	11.00	CX34-44/48	SL280UH110V60C	5697376
13ACX-036-230	TXV	35,600	13.00	11.00	CX34-44/48	SL280UH110XV60C	5697379
13ACX-036-230	TXV	35,400	14.00	11.00	CX34-44/48	SLP98UH090XV36C	5697380
13ACX-036-230	TXV	35,200	14.00	11.00	CX34-44/48	SLP98UH090XV48C	5697381
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-44/48	SLP98UH110XV60C	5697382
13ACX-036-230	TXV	35,200	13.00	11.00	CX34-50/60C		5697383
13ACX-036-230	TXV	36,000	14.50	12.00	CX34-50/60C	EL180UH090E60C	5737059
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-50/60C	EL180UH110E60C	5738836
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-50/60C	EL180UH110XE60C	5739657
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-50/60C	EL195UH090XE48C	5699596
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-50/60C	EL195UH110XE60C	5699597
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-50/60C	EL296UH090XE48C	5697401
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-50/60C	EL296UH090XV36C	5699598
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-50/60C	EL296UH090XV48C	5699599
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-50/60C	EL296UH110XE60C	5697402
13ACX-036-230	TXV	36,200	14.25	11.70	CX34-50/60C	SL280UH090V60C	5699602
13ACX-036-230	TXV	36,200	14.25	11.70	CX34-50/60C	SL280UH090XV60C	5699605
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-50/60C	SL280UH110V60C	5699603
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-50/60C	SL280UH110XV60C	5699606
13ACX-036-230	TXV	35,800	14.00	11.00	CX34-50/60C	SLP98UH090XV36C	5699607
13ACX-036-230	TXV	35,600	14.00	11.00	CX34-50/60C	SLP98UH090XV48C	5699608

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-036-230	TXV	36,000	14.00	11.00	CX34-50/60C	SLP98UH110XV60C	5699609
13ACX-042-230	RFC	41,500	13.00	11.00	C33-38		5560935
13ACX-042-230	RFC	41,500	13.00	11.00	C33-43		5560938
13ACX-042-230	RFC	42,000	13.00	11.00	C33-49		5560951
13ACX-042-230	RFC	41,000	13.00	10.50	C33-50/60C		5560965
13ACX-042-230	RFC	42,500	13.00	11.00	C33-62C		5562177
13ACX-042-230	RFC	41,500	13.00	11.00	CH33-43		5561010
13ACX-042-230	RFC	41,500	13.00	11.00	CH33-48		5561022
13ACX-042-230	RFC	42,000	13.00	11.00	CH33-49		5561025
13ACX-042-230	RFC	42,000	13.00	11.00	CH33-50/60C		5561036
13ACX-042-230	TXV	41,500	13.00	11.00	C33-38B		6796676
13ACX-042-230	TXV	41,500	13.00	11.00	C33-43		6796677
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH090E48B	5735706
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH090E60C	5736802
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH090XE48B	5737580
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH110E60C	5738594
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH110XE60C	5739454
13ACX-042-230	TXV	41,500	14.00	11.50	C33-43	EL195UH090XE48C	5560939
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL195UH110XE60C	5560940
13ACX-042-230	TXV	41,500	14.00	11.50	C33-43	EL296UH090XE48C	5649126
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH090XV48C	5560941
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH090XV60C	5560942
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH110XE60C	5649127
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH110XV48C	5685179
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH110XV60C	5560944
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH090V60C	5561107
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH090XV60C	5561108
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH110V60C	5561109
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH110XV60C	5561110
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SLO185B124/141V60	7109960
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SLO185UF124/141V60	7109950
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SLP98UH090XV48C	5560948
13ACX-042-230	TXV	42,000	14.00	11.50	C33-43	SLP98UH110XV60C	5560949
13ACX-042-230	TXV	41,000	13.00	10.50	C33-48		5561111
13ACX-042-230	TXV	41,500	14.00	11.50	C33-48	EL180UH090E60C	5736804
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL180UH090E60C	5736805
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL180UH110E60C	5738597
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL180UH110XE60C	5739456
13ACX-042-230	TXV	42,000	14.00	11.50	C33-49	EL195UH090XE48C	5560952
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL195UH110XE60C	5560953
13ACX-042-230	TXV	42,000	14.00	11.50	C33-49	EL296UH090XE48C	5649128
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH090XV48C	5560954
13ACX-042-230	TXV	42,000	14.00	11.50	C33-49	EL296UH090XV60C	5560955
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH110XE60C	5649129
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH110XV48C	5560956
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH110XV60C	5560957
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH090V60C	5561112
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH090XV60C	5561114
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH110V60C	5561113

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH110XV60C	5561115
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SLO185B124/141V60	7109961
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SLO185UF124/141V60	7109951
13ACX-042-230	TXV	42,000	14.00	11.50	C33-49	SLP98UH090XV36C	5560961
13ACX-042-230	TXV	42,000	14.00	11.50	C33-49	SLP98UH090XV48C	5560962
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SLP98UH090XV60C	5560963
13ACX-042-230	TXV	42,500	14.00	11.50	C33-49	SLP98UH110XV60C	5560964
13ACX-042-230	TXV	42,000	13.00	11.00	C33-49C		6796678
13ACX-042-230	TXV	41,000	13.00	10.50	C33-50/60C		6796679
13ACX-042-230	TXV	42,000	14.00	11.50	C33-50/60C	EL180UH090E60C	5736807
13ACX-042-230	TXV	41,500	14.00	11.50	C33-50/60C	EL180UH110E60C	5738598
13ACX-042-230	TXV	41,500	14.00	11.50	C33-50/60C	EL180UH110XE60C	5739458
13ACX-042-230	TXV	41,000	13.00	11.00	C33-50/60C	SLP98UH090XV36C	5561003
13ACX-042-230	TXV	41,000	13.00	11.00	C33-50/60C	SLP98UH090XV48C	5561004
13ACX-042-230	TXV	41,500	13.00	11.00	C33-50/60C	SLP98UH090XV60C	5561005
13ACX-042-230	TXV	41,000	13.00	11.00	C33-50/60C	SLP98UH110XV60C	5561006
13ACX-042-230	TXV	42,500	14.00	11.50	C33-60D	SLO185B124/141V60	7109963
13ACX-042-230	TXV	42,500	14.00	11.50	C33-60D	SLO185UF124/141V60	7109953
13ACX-042-230	TXV	42,500	13.00	11.00	C33-62C		6796680
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	EL180UH090E60C	5736809
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	EL180UH110E60C	5738600
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	EL180UH110XE60C	5739460
13ACX-042-230	TXV	43,000	14.00	12.00	C33-62C	EL195UH090XE48C	5560969
13ACX-042-230	TXV	43,500	14.00	12.00	C33-62C	EL195UH110XE60C	5560970
13ACX-042-230	TXV	43,000	14.00	12.00	C33-62C	EL296UH090XE48C	5649130
13ACX-042-230	TXV	43,000	14.00	12.00	C33-62C	EL296UH090XV48C	5560971
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	EL296UH090XV60C	5560972
13ACX-042-230	TXV	43,500	14.00	12.00	C33-62C	EL296UH110XE60C	5649131
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	EL296UH110XV48C	5685180
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	EL296UH110XV60C	5560974
13ACX-042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH090V60C	5560977
13ACX-042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH090XV60C	5560980
13ACX-042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH110V60C	5560978
13ACX-042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH110XV60C	5560981
13ACX-042-230	TXV	43,500	14.50	12.00	C33-62C	SLO185B124/141V60	7109962
13ACX-042-230	TXV	43,500	14.50	12.00	C33-62C	SLO185UF124/141V60	7109952
13ACX-042-230	TXV	43,000	14.00	11.50	C33-62C	SLP98UH090XV36C	5560982
13ACX-042-230	TXV	43,000	14.00	12.00	C33-62C	SLP98UH090XV48C	5560983
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	SLP98UH090XV60C	5560984
13ACX-042-230	TXV	43,000	14.50	12.00	C33-62C	SLP98UH110XV60C	5560985
13ACX-042-230	TXV	42,500	14.50	11.50	C33-62D	SLO185B124/141V60	7109964
13ACX-042-230	TXV	42,500	14.50	11.50	C33-62D	SLO185UF124/141V60	7109954
13ACX-042-230	TXV	41,500	13.00	11.00	CBX25UH-042		5732780
13ACX-042-230	TXV	42,000	14.50	12.00	CBX25UHV-042		6970121
13ACX-042-230	TXV	42,000	14.00	11.50	CBX27UH-042		5560987
13ACX-042-230	TXV	42,000	14.00	11.50	CBX27UH-048		5560988
13ACX-042-230	TXV	40,500	13.00	11.00	CBX32M-036		5560989
13ACX-042-230	TXV	40,500	13.00	11.00	CBX32M-042		5560990
13ACX-042-230	TXV	41,500	13.00	11.00	CBX32M-048		5560991

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-042-230	TXV	42,000	14.00	11.00	CBX32MV-048		5562178
13ACX-042-230	TXV	42,000	13.00	11.00	CBX40UHV-042		5560992
13ACX-042-230	TXV	42,000	14.00	11.00	CBX40UHV-048		5562179
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-41	EL180UH090E48B	5735708
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-41	EL180UH090E60C	5736811
13ACX-042-230	TXV	40,500	13.00	11.00	CH23-41	EL180UH110E60C	5738602
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-51	EL180UH090E48B	5735710
13ACX-042-230	TXV	41,000	14.00	11.00	CH23-51	EL180UH090E60C	5736833
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-51	EL180UH110E60C	5738604
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-51	EL296UH110XV48C	5560996
13ACX-042-230	TXV	41,500	14.00	11.50	CH23-65	EL180UH090E60C	5736814
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-65	EL195UH090XE48C	5560999
13ACX-042-230	TXV	41,500	13.00	11.00	CH23-65	EL195UH110XE60C	5561000
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-65	EL296UH090XE48C	5649132
13ACX-042-230	TXV	41,000	13.00	11.00	CH23-65	EL296UH090XV48C	5561001
13ACX-042-230	TXV	41,000	14.00	11.00	CH23-65	EL296UH090XV60C	5561117
13ACX-042-230	TXV	41,500	13.00	11.00	CH23-65	EL296UH110XE60C	5649133
13ACX-042-230	TXV	41,500	14.00	11.00	CH23-65	EL296UH110XV60C	5561118
13ACX-042-230	TXV	41,500	14.00	11.50	CH23-65	SL280UH090V60C	5561119
13ACX-042-230	TXV	41,000	14.00	11.00	CH23-65	SL280UH110V60C	5561120
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-43	EL180UH090E48B	5735713
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43	EL180UH090E60C	5736816
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43	EL180UH110E60C	5738606
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43	EL296UH090XV48C	5561012
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43	EL296UH090XV60C	5561013
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-43	EL296UH110XV60C	5562180
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-43	SL280UH090V36B	5561008
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-43	SL280UH090V48B	5561009
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-43	SL280UH090V60C	5561121
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43	SL280UH110V60C	5561122
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43	SLP98UH090XV48C	5561017
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-43	SLP98UH090XV60C	5561018
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43	SLP98UH110XV60C	5561019
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43C	EL195UH090XE48C	5561011
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-43C	EL296UH090XE48C	5649134
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-43C	EL296UH110XV48C	5561014
13ACX-042-230	TXV	42,000	14.00	11.00	CH33-44/48	EL180UH090E48B	5735716
13ACX-042-230	TXV	41,000	13.00	11.00	CH33-44/48	EL296UH045XV36B	5561020
13ACX-042-230	TXV	41,500	13.00	11.00	CH33-44/48	EL296UH070XV36B	6683111
13ACX-042-230	TXV	41,500	14.00	11.50	CH33-48	EL180UH090E60C	5736818
13ACX-042-230	TXV	41,500	14.00	11.50	CH33-48	EL180UH110E60C	5738607
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	EL180UH090E60C	5736819
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	EL180UH110E60C	5738609
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-49	EL195UH090XE48C	5561026
13ACX-042-230	TXV	43,000	14.00	11.50	CH33-49	EL195UH110XE60C	5561027
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-49	EL296UH090XE48C	5649135
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH090XV48C	5561028
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH090XV60C	5561029
13ACX-042-230	TXV	43,000	14.00	11.50	CH33-49	EL296UH110XE60C	5649136

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH110XV48C	5561030
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH110XV60C	5561031
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	SL280UH090V60C	5561124
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	SLP98UH090XV48C	5561034
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-49	SLP98UH110XV60C	5561035
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL180UH090E60C	5736822
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL180UH110E60C	5738611
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL195UH090XE48C	5561037
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL195UH110XE60C	5561038
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL296UH090XE48C	5649137
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH090XV48C	5561039
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL296UH090XV60C	5561040
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH110XE60C	5649138
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH110XV48C	5561041
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH110XV60C	5561042
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	SL280UH090V60C	5561125
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	SL280UH110V60C	5561126
13ACX-042-230	TXV	42,000	14.00	11.50	CH33-50/60C	SLP98UH090XV48C	5561045
13ACX-042-230	TXV	42,500	14.00	11.50	CH33-50/60C	SLP98UH110XV60C	5561046
13ACX-042-230	TXV	40,500	13.00	11.00	CH35-36B		7164407
13ACX-042-230	TXV	41,500	14.25	12.00	CH35-36B	EL180UH090E48B	7164400
13ACX-042-230	TXV	41,500	14.25	12.00	CH35-36B	EL180UH090XE48B	7164401
13ACX-042-230	TXV	40,500	13.00	11.00	CH35-36B	EL296UH070XV36B	7164402
13ACX-042-230	TXV	41,000	14.00	11.50	CH35-36B	SL280UH090V48B	7164403
13ACX-042-230	TXV	41,000	14.00	11.50	CH35-36B	SL280UH090XV48B	7164404
13ACX-042-230	TXV	40,500	13.00	11.00	CH35-36B	SLP98UH070XV36B	7164405
13ACX-042-230	TXV	41,000	13.00	11.00	CH35-36C		7164408
13ACX-042-230	TXV	41,500	14.25	12.00	CH35-36C	EL180UH090E60C	7164415
13ACX-042-230	TXV	41,500	14.25	12.00	CH35-36C	EL180UH110E60C	7164416
13ACX-042-230	TXV	41,500	14.25	12.00	CH35-36C	EL180UH110XE60C	7164417
13ACX-042-230	TXV	41,000	14.00	11.50	CH35-36C	EL195UH090XE48C	7164409
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	EL195UH110XE60C	7164411
13ACX-042-230	TXV	41,000	14.00	11.50	CH35-36C	EL296UH090XE48C	7164410
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	EL296UH090XV36C	7164413
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	EL296UH090XV48C	7164414
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	EL296UH110XE60C	7164412
13ACX-042-230	TXV	42,000	14.25	12.00	CH35-36C	SL280UH090V60C	7164418
13ACX-042-230	TXV	42,000	14.25	12.00	CH35-36C	SL280UH090XV60C	7164419
13ACX-042-230	TXV	41,500	14.25	11.50	CH35-36C	SL280UH110V60C	7164420
13ACX-042-230	TXV	41,500	14.25	11.50	CH35-36C	SL280UH110XV60C	7164421
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH090XV36C	7164422
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH090XV48C	7164423
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH090XV60C	7164424
13ACX-042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH110XV60C	7164425
13ACX-042-230	TXV	42,000	13.00	11.50	CH35-42B		7164435
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-42B	EL180UH090E48B	7164426
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-42B	EL180UH090XE48B	7164427
13ACX-042-230	TXV	42,000	14.25	12.00	CH35-42B	EL296UH070XV36B	7164428
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-42B	SL280UH090V48B	7164429

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-42B	SL280UH090XV48B	7164430
13ACX-042-230	TXV	42,000	14.25	12.00	CH35-42B	SLP98UH070XV36B	7164431
13ACX-042-230	TXV	42,000	13.00	11.50	CH35-42C		7164436
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-42C	EL180UH090E60C	7164432
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL180UH110E60C	7164433
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL180UH110XE60C	7164434
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL195UH090XE48C	7164437
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL195UH110XE60C	7164438
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH090XE48C	7164442
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH090XV36C	7164439
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-42C	EL296UH090XV48C	7164440
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-42C	EL296UH090XV60C	7164441
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH110XE60C	7164444
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH110XV60C	7164443
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH090V60C	7164445
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH090XV60C	7164446
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH110V60C	7164447
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH110XV60C	7164448
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	SLP98UH090XV36C	7164449
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-42C	SLP98UH090XV48C	7164450
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-42C	SLP98UH090XV60C	7164451
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-42C	SLP98UH110XV60C	7164452
13ACX-042-230	TXV	42,000	13.00	11.50	CH35-48B		7164455
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48B	EL180UH090E48B	7164453
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48B	EL180UH090XE48B	7164454
13ACX-042-230	TXV	42,000	14.00	11.50	CH35-48B	EL296UH070XV36B	7164456
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48B	SL280UH090V48B	7164457
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48B	SL280UH090XV48B	7164458
13ACX-042-230	TXV	42,000	14.00	11.50	CH35-48B	SLP98UH070XV36B	7164459
13ACX-042-230	TXV	42,000	13.00	11.50	CH35-48C		7164465
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL180UH090E60C	7164460
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL180UH110E60C	7164462
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL180UH110XE60C	7164464
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL195UH090XE48C	7164466
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL195UH110XE60C	7164467
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XE48C	7164471
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XV36C	7164468
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XV48C	7164469
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XV60C	7164470
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH110XE60C	7164473
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH110XV60C	7164472
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH090V60C	7164474
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH090XV60C	7164475
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH110V60C	7164476
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH110XV60C	7164477
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH090XV36C	7164478
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH090XV48C	7164479
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH090XV60C	7164480
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH110XV60C	7164481

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-042-230	TXV	42,000	13.00	11.50	CH35-51C		7164482
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-51C	EL180UH090E60C	7164491
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-51C	EL180UH110E60C	7164492
13ACX-042-230	TXV	42,000	15.00	12.50	CH35-51C	EL180UH110XE60C	7164493
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	EL195UH090XE48C	7164483
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	EL195UH110XE60C	7164484
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH090XE48C	7164488
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH090XV36C	7164485
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-51C	EL296UH090XV48C	7164486
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-51C	EL296UH090XV60C	7164487
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH110XE60C	7164490
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH110XV60C	7164489
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH090V60C	7164494
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH090XV60C	7164495
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH110V60C	7164496
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH110XV60C	7164497
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	SLP98UH090XV36C	7164498
13ACX-042-230	TXV	42,000	14.50	12.50	CH35-51C	SLP98UH090XV48C	7164499
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	SLP98UH090XV60C	7164500
13ACX-042-230	TXV	42,000	14.50	12.20	CH35-51C	SLP98UH110XV60C	7164501
13ACX-042-230	TXV	40,500	13.00	11.00	CR33-48	EL195DF070XE48B	5561047
13ACX-042-230	TXV	41,000	13.00	11.00	CR33-48	EL195DF090XE48C	5562181
13ACX-042-230	TXV	40,500	13.00	11.00	CR33-48	EL296DF070XE48B	5649139
13ACX-042-230	TXV	40,500	13.00	11.00	CR33-48	EL296DF070XV48B	5561048
13ACX-042-230	TXV	41,000	13.00	11.00	CR33-48	EL296DF090XE48C	5649146
13ACX-042-230	TXV	41,500	13.00	11.00	CR33-48	EL296DF090XV60C	5561049
13ACX-042-230	TXV	41,500	13.00	11.00	CR33-48	EL296DF110XV60C	5561050
13ACX-042-230	TXV	41,500	13.00	11.00	CR33-50/60		5561051
13ACX-042-230	TXV	42,000	14.00	11.50	CR33-50/60	EL180DF110E60C	5733565
13ACX-042-230	TXV	42,000	14.00	11.50	CR33-50/60	EL296DF110XV60C	5561052
13ACX-042-230	TXV	42,000	14.00	11.50	CR33-50/60	SL280DF090V60C	5561127
13ACX-042-230	TXV	42,000	14.00	11.50	CR33-50/60	SL280DF110V60C	5561128
13ACX-042-230	TXV	41,000	13.00	10.50	CR33-60		5561054
13ACX-042-230	TXV	41,500	13.00	11.00	CX34-38B	EL296UH045XV36B	5561055
13ACX-042-230	TXV	41,500	13.00	11.00	CX34-43		5561058
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH090E48B	5735715
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH090E60C	5736824
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH090XE48B	5737583
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH110E60C	5738613
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH110XE60C	5739462
13ACX-042-230	TXV	41,500	14.00	11.50	CX34-43	EL195UH090XE48C	5561059
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL195UH110XE60C	5561060
13ACX-042-230	TXV	41,500	14.00	11.50	CX34-43	EL296UH090XE48C	5649140
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH090XV48C	5561061
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH090XV60C	5561062
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH110XE60C	5649141
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH110XV48C	5561063
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH110XV60C	5561064
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	SL280UH090V60C	5561129

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	SL280UH090XV60C	5562182
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	SL280UH110XV60C	5561130
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	SLO185B124/141V60	7109965
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	SLO185UF124/141V60	7109955
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	SLP98UH090XV48C	5561068
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-43	SLP98UH110XV60C	5561069
13ACX-042-230	TXV	41,000	13.00	10.50	CX34-44/48		5562183
13ACX-042-230	TXV	41,500	14.00	11.50	CX34-44/48	EL180UH090E60C	5736826
13ACX-042-230	TXV	42,000	13.00	11.00	CX34-49		5561071
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL180UH090E60C	5736827
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL180UH110E60C	5738616
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL180UH110XE60C	5739464
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-49	EL195UH090XE48C	5561072
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL195UH110XE60C	5561073
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-49	EL296UH090XE48C	5649142
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH090XV48C	5561074
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-49	EL296UH090XV60C	5561075
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH110XE60C	5649143
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH110XV48C	5561076
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH110XV60C	5561077
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH090V60C	5561131
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH090XV60C	5561133
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH110V60C	5561132
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH110XV60C	5562184
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SLO185B124/141V60	7109966
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SLO185UF124/141V60	7109956
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-49	SLP98UH090XV36C	5561081
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-49	SLP98UH090XV48C	5561082
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SLP98UH090XV60C	5561083
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-49	SLP98UH110XV60C	5561084
13ACX-042-230	TXV	41,000	13.00	10.50	CX34-50/60C		5561085
13ACX-042-230	TXV	42,000	14.00	11.50	CX34-50/60C	EL180UH090E60C	5736829
13ACX-042-230	TXV	41,500	14.00	11.50	CX34-50/60C	EL180UH110E60C	5738618
13ACX-042-230	TXV	41,500	14.00	11.50	CX34-50/60C	EL180UH110XE60C	5739466
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-60D	SLO185B124/141V60	7109968
13ACX-042-230	TXV	42,500	14.00	11.50	CX34-60D	SLO185UF124/141V60	7109958
13ACX-042-230	TXV	42,500	13.00	11.00	CX34-62C		5561089
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	EL180UH090E60C	5736831
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	EL180UH110E60C	5738619
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	EL180UH110XE60C	5739467
13ACX-042-230	TXV	43,000	14.00	12.00	CX34-62C	EL195UH090XE48C	5561090
13ACX-042-230	TXV	43,500	14.00	12.00	CX34-62C	EL195UH110XE60C	5561091
13ACX-042-230	TXV	43,000	14.00	12.00	CX34-62C	EL296UH090XE48C	5649144
13ACX-042-230	TXV	43,000	14.00	12.00	CX34-62C	EL296UH090XV48C	5561092
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	EL296UH090XV60C	5561093
13ACX-042-230	TXV	43,500	14.00	12.00	CX34-62C	EL296UH110XE60C	5649145
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	EL296UH110XV48C	5561094
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	EL296UH110XV60C	5561095
13ACX-042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH090V60C	5561098

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH090XV60C	5561101
13ACX-042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH110V60C	5561099
13ACX-042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH110XV60C	5561102
13ACX-042-230	TXV	43,500	14.50	12.00	CX34-62C	SLO185B124/141V60	7109967
13ACX-042-230	TXV	43,500	14.50	12.00	CX34-62C	SLO185UF124/141V60	7109957
13ACX-042-230	TXV	43,000	14.00	11.50	CX34-62C	SLP98UH090XV36C	5561103
13ACX-042-230	TXV	43,000	14.00	12.00	CX34-62C	SLP98UH090XV48C	5561104
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	SLP98UH090XV60C	5561105
13ACX-042-230	TXV	43,000	14.50	12.00	CX34-62C	SLP98UH110XV60C	5561106
13ACX-042-230	TXV	42,500	14.50	11.50	CX34-62D	SLO185B124/141V60	7109969
13ACX-042-230	TXV	42,500	14.50	11.50	CX34-62D	SLO185UF124/141V60	7109959
13ACX-048-230	RFC	48,500	13.00	11.00	C33-43		5615568
13ACX-048-230	RFC	49,000	13.00	11.00	C33-49		5615569
13ACX-048-230	RFC	50,000	13.00	11.00	C33-62C		5615583
13ACX-048-230	RFC	49,000	13.00	11.00	C33-62D		5615600
13ACX-048-230	RFC	49,000	13.00	11.00	CH23-68		5615620
13ACX-048-230	RFC	48,500	13.00	11.00	CH33-43		5615686
13ACX-048-230	RFC	49,000	13.00	11.00	CH33-49		5615687
13ACX-048-230	RFC	49,000	13.00	11.00	CH33-50/60C		5615627
13ACX-048-230	RFC	48,500	13.00	11.00	CH33-60D		5615628
13ACX-048-230	RFC	49,000	13.00	11.00	CH33-62D		5615629
13ACX-048-230	TXV	48,000	13.00	11.00	C33-38B	EL180UH090E48B	5735801
13ACX-048-230	TXV	48,000	13.00	11.00	C33-38B	EL180UH090XE48B	5737660
13ACX-048-230	TXV	48,000	13.00	11.00	C33-38B	SL280UH090V48B	5615685
13ACX-048-230	TXV	48,000	13.00	11.00	C33-38B	SL280UH090XV48B	5615567
13ACX-048-230	TXV	48,500	13.00	11.00	C33-43		5615671
13ACX-048-230	TXV	49,000	13.00	11.00	C33-49		5615672
13ACX-048-230	TXV	49,000	14.00	11.70	C33-49	EL180UH090E60C	5736898
13ACX-048-230	TXV	49,000	14.00	11.70	C33-49	EL180UH110E60C	5738683
13ACX-048-230	TXV	49,000	14.00	11.70	C33-49	EL180UH110XE60C	5739527
13ACX-048-230	TXV	49,000	14.00	11.70	C33-49	EL195UH110XE60C	5615570
13ACX-048-230	TXV	49,000	14.00	11.70	C33-49	EL296UH110XE60C	5649346
13ACX-048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH090V60C	5615576
13ACX-048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH090XV60C	5615574
13ACX-048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH110V60C	5615577
13ACX-048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH110XV60C	5615575
13ACX-048-230	TXV	47,500	13.00	11.00	C33-50/60C		5615578
13ACX-048-230	TXV	49,000	13.00	11.00	C33-60D		5615579
13ACX-048-230	TXV	49,000	13.00	11.00	C33-60D		5615688
13ACX-048-230	TXV	49,500	14.00	11.70	C33-60D	EL180UH135E60D	5746086
13ACX-048-230	TXV	49,000	14.00	11.70	C33-60D	SL280UH135V60D	5615581
13ACX-048-230	TXV	49,000	14.00	11.70	C33-60D	SLP98UH135XV60D	5615582
13ACX-048-230	TXV	50,000	13.00	11.70	C33-62C		5615673
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL180UH090E60C	5736899
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL180UH110E60C	5738686
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL180UH110XE60C	5739530
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL195UH090XE48C	5615584
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL195UH110XE60C	5615585
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH090XE48C	5649344

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH090XV48C	5615586
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH090XV60C	5615587
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH110XE60C	5649345
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH110XV48C	5615588
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH110XV60C	5615589
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH090V60C	5615595
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH090XV60C	5615592
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH110V60C	5615596
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH110XV60C	5615593
13ACX-048-230	TXV	49,500	14.00	11.70	C33-62C	SLP98UH090XV48C	5615597
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	SLP98UH090XV60C	5615598
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62C	SLP98UH110XV60C	5615599
13ACX-048-230	TXV	49,000	13.00	11.70	C33-62D		5615674
13ACX-048-230	TXV	49,500	14.00	11.70	C33-62D	EL180UH135E60D	5746087
13ACX-048-230	TXV	50,000	14.00	11.70	C33-62D	EL296UH135XV60D	5615602
13ACX-048-230	TXV	49,500	14.00	11.70	C33-62D	SL280UH135V60D	5615603
13ACX-048-230	TXV	49,000	14.00	11.70	C33-62D	SLP98UH135XV60D	5615604
13ACX-048-230	TXV	49,500	13.00	11.00	CBX25UH-048		5732781
13ACX-048-230	TXV	48,000	14.00	12.20	CBX25UHV-048		6970122
13ACX-048-230	TXV	49,500	13.00	11.00	CBX27UH-048		5615606
13ACX-048-230	TXV	49,500	13.00	11.00	CBX27UH-060		5615607
13ACX-048-230	TXV	49,000	13.00	11.00	CBX32M-048		5615608
13ACX-048-230	TXV	49,500	13.00	11.00	CBX32M-060		5615609
13ACX-048-230	TXV	49,000	13.00	11.00	CBX32MV-048		5615610
13ACX-048-230	TXV	49,500	13.00	11.00	CBX32MV-060		5615611
13ACX-048-230	TXV	49,000	13.00	11.00	CBX40UHV-048		5615612
13ACX-048-230	TXV	49,500	13.00	11.00	CBX40UHV-060		5615613
13ACX-048-230	TXV	47,000	13.00	11.00	CH23-51	EL180UH090E60C	5736901
13ACX-048-230	TXV	47,000	13.00	11.00	CH23-51	EL180UH110E60C	5738688
13ACX-048-230	TXV	47,000	13.00	11.00	CH23-51	EL296UH110XV48C	5615614
13ACX-048-230	TXV	48,000	13.00	11.00	CH23-65	EL180UH090E60C	5736903
13ACX-048-230	TXV	48,000	13.00	11.00	CH23-65	EL180UH110E60C	5738690
13ACX-048-230	TXV	47,500	13.00	11.00	CH23-65	EL296UH110XV48C	5615617
13ACX-048-230	TXV	49,000	13.00	11.00	CH23-68		5615675
13ACX-048-230	TXV	50,000	14.00	11.70	CH23-68	EL180UH135E60D	5746088
13ACX-048-230	TXV	48,500	13.00	11.00	CH33-43		5615676
13ACX-048-230	TXV	48,000	13.00	11.00	CH33-44/48B	EL180UH090E48B	5735803
13ACX-048-230	TXV	48,000	13.00	11.00	CH33-48C		5615623
13ACX-048-230	TXV	49,000	13.00	11.00	CH33-49		5615677
13ACX-048-230	TXV	49,000	14.00	11.70	CH33-49	EL180UH090E60C	5736905
13ACX-048-230	TXV	49,000	14.00	11.70	CH33-49	EL180UH110E60C	5738692
13ACX-048-230	TXV	49,000	14.00	11.70	CH33-49	EL180UH110XE60C	5739531
13ACX-048-230	TXV	49,000	13.00	11.00	CH33-50/60C		5615678
13ACX-048-230	TXV	48,500	13.00	11.00	CH33-60D		5615679
13ACX-048-230	TXV	49,000	13.00	11.00	CH33-62D		5615680
13ACX-048-230	TXV	49,500	14.00	11.70	CH33-62D	EL180UH135E60D	5745971
13ACX-048-230	TXV	49,000	14.00	11.70	CH33-62D	SL280UH135V60D	5615631
13ACX-048-230	TXV	48,500	14.00	11.70	CH33-62D	SLP98UH135XV60D	5615632
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-42B		7164509

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-42C		7164510
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	EL195UH090XE48C	7164511
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-42C	EL195UH110XE60C	7164512
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH090XV48C	7164514
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH090XV60C	7164513
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH110XV48C	7164515
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH110XV60C	7164516
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-42C	SL280UH090V60C	7164519
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-42C	SL280UH110V60C	7164520
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	SLP98UH090XV48C	7164521
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	SLP98UH090XV60C	7164522
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-42C	SLP98UH110XV60C	7164523
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-48B		7165317
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-48B	EL180UH090E48B	7164524
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-48B	EL180UH090E60C	7165319
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-48B	EL180UH110E60C	7165320
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-48C		7164525
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-48C	EL180UH090E60C	7164517
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-48C	EL180UH110E60C	7164518
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-48C	EL180UH110XE60C	7164529
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-48C	EL195UH090XE48C	7164526
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-48C	EL195UH110XE60C	7164527
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-48C	EL296UH090XV48C	7164528
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-48C	SL280UH090V60C	7164530
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-48C	SL280UH090XV60C	7164531
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-48C	SL280UH110V60C	7164532
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-48C	SL280UH110XV60C	7164533
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-48C	SLP98UH090XV48C	7164534
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-48C	SLP98UH090XV60C	7164535
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-48C	SLP98UH110XV60C	7164536
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-51C		7164537
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	EL180UH090E60C	7164544
13ACX-048-230	TXV	48,000	14.00	12.00	CH35-51C	EL180UH110E60C	7164545
13ACX-048-230	TXV	48,000	14.00	12.00	CH35-51C	EL180UH110XE60C	7164546
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	EL195UH090XE48C	7164538
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	EL195UH110XE60C	7164539
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-51C	EL296UH090XV48C	7164541
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-51C	EL296UH090XV60C	7164540
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	EL296UH110XV48C	7164543
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-51C	EL296UH110XV60C	7164542
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH090V60C	7164547
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH090XV60C	7164548
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH110V60C	7164549
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH110XV60C	7164550
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-51C	SLP98UH090XV48C	7164551
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-51C	SLP98UH090XV60C	7164552
13ACX-048-230	TXV	48,000	13.00	11.50	CH35-51C	SLP98UH110XV60C	7164553
13ACX-048-230	TXV	48,000	13.00	11.00	CH35-60D		7164554
13ACX-048-230	TXV	48,000	14.00	11.70	CH35-60D	EL180UH135E60D	7164557

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-60D	EL195UH135XE60D	7164555
13ACX-048-230	TXV	48,000	13.00	11.70	CH35-60D	EL296UH135XV60D	7164556
13ACX-048-230	TXV	48,000	14.00	11.70	CH35-60D	SL280UH135V60D	7164558
13ACX-048-230	TXV	48,000	14.00	11.70	CH35-60D	SLP98UH135XV60D	7164559
13ACX-048-230	TXV	48,000	13.00	11.00	CR33-50/60		5615633
13ACX-048-230	TXV	48,000	13.00	11.00	CR33-60		5615634
13ACX-048-230	TXV	48,500	13.00	11.00	CX34-43		5615635
13ACX-048-230	TXV	49,000	13.00	11.00	CX34-49		5615636
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-49	EL180UH090E60C	5736909
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-49	EL180UH110E60C	5738694
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-49	EL180UH110XE60C	5739533
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-49	EL195UH110XE60C	5615637
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-49	EL296UH110XE60C	5649349
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH090V60C	5615643
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH090XV60C	5615641
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH110V60C	5615644
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH110XV60C	5615642
13ACX-048-230	TXV	47,500	13.00	11.00	CX34-50/60C		5615645
13ACX-048-230	TXV	49,000	13.00	11.00	CX34-60D		5615646
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-60D	EL180UH135E60D	5746089
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-60D	SL280UH135V60D	5615648
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-60D	SLP98UH135XV60D	5615649
13ACX-048-230	TXV	50,000	13.00	11.00	CX34-62C		5615650
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL180UH090E60C	5736907
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL180UH110E60C	5738695
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL180UH110XE60C	5739535
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL195UH090XE48C	5615651
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL195UH110XE60C	5615652
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH090XE48C	5649347
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH090XV48C	5615653
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH090XV60C	5615654
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH110XE60C	5649348
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH110XV48C	5615655
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH110XV60C	5615656
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH090V60C	5615662
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH090XV60C	5615659
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH110V60C	5615663
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH110XV60C	5615660
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-62C	SLP98UH090XV48C	5615664
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	SLP98UH090XV60C	5615665
13ACX-048-230	TXV	50,000	14.00	11.70	CX34-62C	SLP98UH110XV60C	5615666
13ACX-048-230	TXV	49,000	13.00	11.00	CX34-62D		5615667
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-62D	EL180UH135E60D	5746090
13ACX-048-230	TXV	49,500	14.00	11.70	CX34-62D	SL280UH135V60D	5615669
13ACX-048-230	TXV	49,000	14.00	11.70	CX34-62D	SLP98UH135XV60D	5615670
13ACX-060-230	RFC	57,500	13.00	11.00	C33-49		5615689
13ACX-060-230	RFC	57,500	13.00	11.00	C33-60D		5615690
13ACX-060-230	RFC	59,000	13.00	11.00	C33-62C		5615691
13ACX-060-230	RFC	58,000	13.00	11.00	C33-62D		5615692

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS (LIMITED AVAILABILITY)

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACX-060-230	TXV	57,500	13.00	11.00	C33-49		5615707
13ACX-060-230	TXV	57,500	13.00	11.00	C33-60D		5615708
13ACX-060-230	TXV	59,000	13.00	11.00	C33-62C		5615709
13ACX-060-230	TXV	58,000	13.00	11.00	C33-62D		5615710
13ACX-060-230	TXV	58,500	13.00	11.00	CBX25UH-060		5732782
13ACX-060-230	TXV	58,500	13.50	11.50	CBX25UHV-060		6970123
13ACX-060-230	TXV	57,500	13.00	11.00	CBX27UH-060		5615694
13ACX-060-230	TXV	56,000	13.00	11.00	CBX32M-048		5615695
13ACX-060-230	TXV	57,000	13.00	11.00	CBX32M-060		5615696
13ACX-060-230	TXV	57,000	13.00	11.00	CBX32MV-048		5615697
13ACX-060-230	TXV	57,500	13.00	11.00	CBX32MV-060		5615698
13ACX-060-230	TXV	57,000	13.00	11.00	CBX32MV-068		5615699
13ACX-060-230	TXV	57,000	13.00	11.00	CBX40UHV-048		5615700
13ACX-060-230	TXV	57,500	13.00	11.00	CBX40UHV-060		5615701
13ACX-060-230	TXV	58,000	13.00	11.00	CH23-68		5615711
13ACX-060-230	TXV	58,000	13.00	11.00	CH23-68		5615715
13ACX-060-230	TXV	57,500	13.00	11.00	CH33-50/60C		5615702
13ACX-060-230	TXV	57,500	13.00	11.00	CH33-50/60C		5615712
13ACX-060-230	TXV	57,000	13.00	11.00	CH33-60D		5615713
13ACX-060-230	TXV	57,000	13.00	11.00	CH33-60D		5615716
13ACX-060-230	TXV	57,000	13.00	11.00	CH33-62D		5615714
13ACX-060-230	TXV	57,000	13.00	11.00	CH33-62D		5615717
13ACX-060-230	TXV	57,000	13.00	11.00	CH33-62D		5615718
13ACX-060-230	TXV	58,000	13.00	11.00	CH35-51C		7164560
13ACX-060-230	TXV	57,500	13.00	11.00	CH35-60D		7164561
13ACX-060-230	TXV	56,000	13.00	11.00	CR33-60D		5615719
13ACX-060-230	TXV	57,500	13.00	11.00	CX34-49		5615703
13ACX-060-230	TXV	57,500	13.00	11.00	CX34-60D		5615704
13ACX-060-230	TXV	59,000	13.00	11.00	CX34-62C		5615705
13ACX-060-230	TXV	58,000	13.00	11.00	CX34-62D		5615706

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN018-230	RFC	18,600	13.00	11.00	C33-19		7617247
13ACXN018-230	RFC	18,800	13.00	11.00	C33-25		7617249
13ACXN018-230	RFC	18,400	13.00	11.00	C33-30		7617250
13ACXN018-230	RFC	19,000	13.00	11.00	C33-31		7617251
13ACXN018-230	RFC	18,500	13.00	11.00	CH33-19		7617260
13ACXN018-230	RFC	18,400	13.00	11.00	CH33-24/30		7617261
13ACXN018-230	RFC	18,900	13.00	11.50	CH33-25		7617254
13ACXN018-230	RFC	18,300	13.00	11.00	CR33-18		7617255
13ACXN018-230	RFC	18,000	13.00	11.00	CR33-24		7617256
13ACXN018-230	RFC	19,000	14.00	11.50	CR33-30/36		7617257
13ACXN018-230	TXV	18,600	13.00	11.00	C33-19		7617571
13ACXN018-230	TXV	19,200	15.00	12.50	C33-19	EL180UH045E36A	7620417
13ACXN018-230	TXV	19,200	15.00	12.50	C33-19	EL180UH045XE36A	7620316
13ACXN018-230	TXV	18,100	13.00	11.00	C33-24		7617248
13ACXN018-230	TXV	18,500	14.50	12.00	C33-24A	EL180UH045E36A	7620418
13ACXN018-230	TXV	18,800	14.50	12.00	C33-24A	EL180UH045XE36A	7620317
13ACXN018-230	TXV	18,800	13.00	11.00	C33-25		7617572
13ACXN018-230	TXV	19,400	15.00	13.00	C33-25A	EL180UH045E36A	7620419
13ACXN018-230	TXV	19,400	15.00	13.00	C33-25A	EL180UH045XE36A	7620318
13ACXN018-230	TXV	19,000	15.00	12.50	C33-30A	EL180UH045E36A	7620420
13ACXN018-230	TXV	19,000	15.00	12.50	C33-30A	EL180UH045XE36A	7620319
13ACXN018-230	TXV	19,000	13.00	11.00	C33-31		7617781
13ACXN018-230	TXV	19,500	15.00	13.00	C33-31A	EL180UH045E36A	7620421
13ACXN018-230	TXV	19,500	15.00	13.00	C33-31A	EL180UH045XE36A	7620320
13ACXN018-230	TXV	18,800	13.00	11.00	C35-24A		8266923
13ACXN018-230	TXV	19,400	15.00	13.00	C35-24A	EL180UH045E36A	8266925
13ACXN018-230	TXV	19,400	15.00	13.00	C35-24A	EL180UH045XE36A	8266928
13ACXN018-230	TXV	19,000	13.00	11.00	C35-30A		8266955
13ACXN018-230	TXV	19,500	15.00	13.00	C35-30A	EL180UH045E36A	8266958
13ACXN018-230	TXV	19,500	15.00	13.00	C35-30A	EL180UH045XE36A	8266963
13ACXN018-230	TXV	18,600	13.00	11.00	CBX25UH-018		7619775
13ACXN018-230	TXV	18,900	14.50	12.50	CBX25UHV-018		7622689
13ACXN018-230	TXV	19,300	15.00	13.00	CBX27UH-018		7617252
13ACXN018-230	TXV	19,300	15.00	13.00	CBX27UH-024		7617253
13ACXN018-230	TXV	18,800	13.00	11.00	CBX32M-018/024		7617258
13ACXN018-230	TXV	19,100	14.00	12.00	CBX32M-030		7617259
13ACXN018-230	TXV	18,500	13.00	11.00	CH33-19		7617573
13ACXN018-230	TXV	19,000	14.50	12.50	CH33-19	EL180UH045E36A	7620424
13ACXN018-230	TXV	19,000	15.00	12.50	CH33-19	EL180UH045XE36A	7620323
13ACXN018-230	TXV	18,400	13.00	11.00	CH33-24/30		7617574
13ACXN018-230	TXV	19,000	15.00	12.50	CH33-24/30	EL180UH045E36A	7620498
13ACXN018-230	TXV	19,000	15.00	12.50	CH33-24/30	EL180UH045XE36A	7620321
13ACXN018-230	TXV	19,400	15.00	12.50	CH33-25A	EL180UH045E36A	7620422
13ACXN018-230	TXV	19,400	15.00	12.50	CH33-25A	EL180UH045XE36A	7620322
13ACXN018-230	TXV	18,900	13.00	11.00	CH33-25B		7617575
13ACXN018-230	TXV	18,000	13.00	11.50	CH35-18A		7622853
13ACXN018-230	TXV	18,500	15.00	12.50	CH35-18A	EL180UH045E36A	7622854
13ACXN018-230	TXV	18,500	14.50	12.50	CH35-18A	EL180UH045XE36A	7622856
13ACXN018-230	TXV	18,500	15.00	12.50	CH35-18A	EL195UH045XE36B	7622858

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN018-230	TXV	18,500	15.00	12.50	CH35-18A	EL296UH045XE36B	7622860
13ACXN018-230	TXV	18,000	13.00	11.50	CH35-24A		7622861
13ACXN018-230	TXV	18,500	15.10	12.50	CH35-24A	EL180UH045E36A	7622863
13ACXN018-230	TXV	18,500	15.10	12.50	CH35-24A	EL180UH045XE36A	7622865
13ACXN018-230	TXV	18,000	13.00	11.50	CH35-24B		7622867
13ACXN018-230	TXV	18,500	15.10	12.50	CH35-24B	EL195UH045E36B	7622869
13ACXN018-230	TXV	18,500	15.10	12.50	CH35-24B	EL296UH045XE36B	7622870
13ACXN018-230	TXV	18,300	13.00	11.00	CR33-18		7617576
13ACXN018-230	TXV	18,800	15.00	12.50	CR33-18	EL180DF045E36A	7620031
13ACXN018-230	TXV	18,000	13.00	11.00	CR33-24		7617777
13ACXN018-230	TXV	18,500	14.50	12.00	CR33-24	EL180DF045E36A	7620033
13ACXN018-230	TXV	19,000	13.00	11.00	CR33-30/36		7617782
13ACXN018-230	TXV	19,600	15.00	13.00	CR33-30/36	EL180DF045E36A	7620035
13ACXN018-230	TXV	18,100	13.00	11.00	CX34-18/24		7617263
13ACXN018-230	TXV	18,500	14.50	12.00	CX34-18/24	EL180UH045E36A	7620423
13ACXN018-230	TXV	18,500	14.50	12.00	CX34-18/24	EL180UH045XE36A	7620324
13ACXN018-230	TXV	18,600	13.00	11.00	CX34-19		7617262
13ACXN018-230	TXV	19,200	15.00	12.50	CX34-19	EL180UH045E36A	7620499
13ACXN018-230	TXV	19,200	15.00	12.50	CX34-19	EL180UH045XE36A	7620325
13ACXN018-230	TXV	18,800	13.00	11.00	CX34-25		7617264
13ACXN018-230	TXV	19,400	15.00	13.00	CX34-25	EL180UH045E36A	7620500
13ACXN018-230	TXV	19,400	15.00	13.00	CX34-25	EL180UH045XE36A	7620326
13ACXN018-230	TXV	18,400	13.00	11.00	CX34-30		7617569
13ACXN018-230	TXV	19,000	15.00	12.50	CX34-30	EL180UH045E36A	7620501
13ACXN018-230	TXV	19,000	15.00	12.50	CX34-30	EL180UH045XE36A	7620344
13ACXN018-230	TXV	19,000	13.00	11.00	CX34-30A		8269459
13ACXN018-230	TXV	19,500	15.00	13.00	CX34-30A	EL180UH045E36A	8269461
13ACXN018-230	TXV	19,500	15.00	13.00	CX34-30A	EL180UH045XE36A	8269460
13ACXN018-230	TXV	19,000	13.00	11.00	CX34-31		7617570
13ACXN018-230	TXV	19,500	15.00	13.00	CX34-31	EL180UH045E36A	7620533
13ACXN018-230	TXV	19,500	15.00	13.00	CX34-31	EL180UH045XE36A	7620346
13ACXN018-230	TXV	18,100	13.00	11.00	CX35-18/24A		8266542
13ACXN018-230	TXV	18,500	14.50	12.00	CX35-18/24A	EL180UH045E36A	8266543
13ACXN018-230	TXV	18,500	14.50	12.00	CX35-18/24A	EL180UH045XE36A	8266547
13ACXN018-230	TXV	18,800	13.00	11.00	CX35-24A		8269458
13ACXN018-230	TXV	19,400	15.00	13.00	CX35-24A	EL180UH045E36A	8266582
13ACXN018-230	TXV	19,400	15.00	13.00	CX35-24A	EL180UH045XE36A	8266586
13ACXN018-230	TXV	18,800	13.00	11.00	CX35-24B		8266581
13ACXN018-230	TXV	19,000	13.00	11.00	CX35-30A		8266613
13ACXN018-230	TXV	19,500	15.00	13.00	CX35-30A	EL180UH045E36A	8266615
13ACXN018-230	TXV	19,500	15.00	13.00	CX35-30A	EL180UH045XE36A	8266620
13ACXN024-230	RFC	23,400	13.00	11.00	C33-19		7617652
13ACXN024-230	RFC	23,600	13.50	11.00	C33-25		7617638
13ACXN024-230	RFC	23,200	13.00	11.00	C33-30		7617598
13ACXN024-230	RFC	24,000	13.50	11.50	C33-31		7617609
13ACXN024-230	RFC	23,600	13.50	11.00	C33-36		7617577
13ACXN024-230	RFC	24,200	14.00	11.50	C33-38		7617620
13ACXN024-230	RFC	23,400	13.00	11.00	CH33-19		7617642
13ACXN024-230	RFC	23,800	13.50	11.00	CH33-25		7617655

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	RFC	24,200	14.00	11.50	CH33-31		7617664
13ACXN024-230	RFC	23,600	13.50	11.00	CH33-36		7617673
13ACXN024-230	RFC	22,800	13.00	10.50	CR33-24		7617684
13ACXN024-230	RFC	24,000	13.50	11.50	CR33-30/36		7617689
13ACXN024-230	TXV	23,400	13.00	11.00	C33-19		7617764
13ACXN024-230	TXV	24,000	15.00	12.00	C33-19	EL180UH045E36A	7620222
13ACXN024-230	TXV	24,000	15.00	12.00	C33-19	EL180UH045XE36A	7620354
13ACXN024-230	TXV	24,000	15.10	12.50	C33-19	SL280UH070V36A	7617653
13ACXN024-230	TXV	24,000	15.10	12.50	C33-19	SL280UH070XV36A	7617654
13ACXN024-230	TXV	23,200	14.00	11.50	C33-24A	EL180UH045E36A	7620227
13ACXN024-230	TXV	23,200	14.00	11.50	C33-24A	EL180UH045XE36A	7619825
13ACXN024-230	TXV	23,400	14.00	12.00	C33-24A	SL280UH070V36A	7617701
13ACXN024-230	TXV	23,400	14.00	12.00	C33-24A	SL280UH070XV36A	7617702
13ACXN024-230	TXV	23,000	14.00	12.00	C33-24B	EL180UH070E36B	7619812
13ACXN024-230	TXV	23,000	14.00	12.00	C33-24B	EL180UH070XE36B	7620395
13ACXN024-230	TXV	23,000	14.00	12.00	C33-24B	EL195UH045XE36B	7617703
13ACXN024-230	TXV	23,400	14.00	12.00	C33-24B	EL195UH070XE36B	7617704
13ACXN024-230	TXV	23,000	14.00	12.00	C33-24B	EL296UH045XE36B	7619200
13ACXN024-230	TXV	23,400	14.00	12.00	C33-24B	EL296UH070XE36B	7619201
13ACXN024-230	TXV	23,400	14.00	12.00	C33-24B	EL296UH070XV36B	7617705
13ACXN024-230	TXV	23,400	14.25	12.00	C33-24B	SL280UH090V36B	7617634
13ACXN024-230	TXV	23,400	14.00	12.00	C33-24B	SLP98UH070XV36B	7617635
13ACXN024-230	TXV	23,400	14.50	12.00	C33-24C	EL296UH090XV36C	7617636
13ACXN024-230	TXV	23,200	14.50	12.00	C33-24C	SLP98UH090XV36C	7617637
13ACXN024-230	TXV	23,600	13.50	11.00	C33-25		7617765
13ACXN024-230	TXV	24,400	15.50	12.50	C33-25A	EL180UH045E36A	7620219
13ACXN024-230	TXV	24,400	15.50	12.50	C33-25A	EL180UH045XE36A	7620351
13ACXN024-230	TXV	24,200	15.00	12.50	C33-25A	SL280UH070V36A	7617639
13ACXN024-230	TXV	24,200	15.00	12.50	C33-25A	SL280UH070XV36A	7617647
13ACXN024-230	TXV	24,200	15.50	12.50	C33-25B	EL180UH070E36B	7620228
13ACXN024-230	TXV	24,200	15.50	12.50	C33-25B	EL180UH070XE36B	7620379
13ACXN024-230	TXV	24,000	15.00	12.50	C33-25B	EL195UH045XE36B	7617648
13ACXN024-230	TXV	24,200	15.00	12.50	C33-25B	EL195UH070XE36B	7617649
13ACXN024-230	TXV	24,000	15.00	12.50	C33-25B	EL296UH045XE36B	7619188
13ACXN024-230	TXV	24,200	15.50	12.50	C33-25B	EL296UH045XV36B	7617650
13ACXN024-230	TXV	24,200	15.00	12.50	C33-25B	EL296UH070XE36B	7619189
13ACXN024-230	TXV	24,200	15.50	12.50	C33-25B	EL296UH070XV36B	7617651
13ACXN024-230	TXV	24,400	15.10	12.50	C33-25B	SL280UH090V36B	7617596
13ACXN024-230	TXV	24,200	15.50	12.50	C33-25B	SLP98UH070XV36B	7617597
13ACXN024-230	TXV	23,200	13.00	11.00	C33-30		7617766
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30A	EL180UH045E36A	7620560
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30A	EL180UH045XE36A	7620348
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30A	SL280UH070V36A	7617599
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30A	SL280UH070XV36A	7617600
13ACXN024-230	TXV	23,600	14.50	12.00	C33-30B	EL180UH070E36B	7620212
13ACXN024-230	TXV	23,600	14.50	12.00	C33-30B	EL180UH070XE36B	7620380
13ACXN024-230	TXV	23,200	14.00	12.00	C33-30B	EL195UH045XE36B	7617603
13ACXN024-230	TXV	23,600	14.50	12.00	C33-30B	EL195UH070XE36B	7617604
13ACXN024-230	TXV	23,200	14.00	12.00	C33-30B	EL296UH045XE36B	7619180

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30B	EL296UH045XV36B	7617605
13ACXN024-230	TXV	23,600	14.50	12.00	C33-30B	EL296UH070XE36B	7619181
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30B	EL296UH070XV36B	7617606
13ACXN024-230	TXV	23,800	14.50	12.20	C33-30B	SL280UH090V36B	7617601
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30B	SLP98UH070XV36B	7617602
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30C	EL296UH090XV36C	7617607
13ACXN024-230	TXV	23,800	14.50	12.00	C33-30C	SLP98UH090XV36C	7617608
13ACXN024-230	TXV	24,000	13.50	11.50	C33-31		7617767
13ACXN024-230	TXV	24,800	15.10	13.00	C33-31A	SL280UH070V36A	7617612
13ACXN024-230	TXV	24,800	15.10	13.00	C33-31A	SL280UH070XV36A	7617613
13ACXN024-230	TXV	24,400	15.50	12.50	C33-31B	EL180UH070E36B	7620213
13ACXN024-230	TXV	24,400	15.50	12.50	C33-31B	EL180UH070XE36B	7620377
13ACXN024-230	TXV	24,200	15.00	12.50	C33-31B	EL195UH045XE36B	7617615
13ACXN024-230	TXV	24,400	15.50	12.50	C33-31B	EL195UH070XE36B	7617616
13ACXN024-230	TXV	24,200	15.00	12.50	C33-31B	EL296UH045XE36B	7619182
13ACXN024-230	TXV	24,600	15.50	13.00	C33-31B	EL296UH045XV36B	7617610
13ACXN024-230	TXV	24,400	15.50	12.50	C33-31B	EL296UH070XE36B	7619183
13ACXN024-230	TXV	24,600	15.50	13.00	C33-31B	EL296UH070XV36B	7617611
13ACXN024-230	TXV	24,600	15.50	12.50	C33-31B	SLP98UH070XV36B	7617614
13ACXN024-230	TXV	23,600	13.50	11.00	C33-36		7617768
13ACXN024-230	TXV	24,400	15.00	12.50	C33-36A	EL180UH045E36A	7620558
13ACXN024-230	TXV	24,400	15.00	12.50	C33-36A	EL180UH045XE36A	7620347
13ACXN024-230	TXV	24,400	15.10	12.50	C33-36A	SL280UH070V36A	7617581
13ACXN024-230	TXV	24,400	15.10	12.50	C33-36A	SL280UH070XV36A	7617582
13ACXN024-230	TXV	24,200	15.50	12.50	C33-36B	EL180UH070E36B	7620214
13ACXN024-230	TXV	24,200	15.50	12.50	C33-36B	EL180UH070XE36B	7620381
13ACXN024-230	TXV	23,800	15.00	12.00	C33-36B	EL195UH045XE36B	7617583
13ACXN024-230	TXV	24,200	15.00	12.50	C33-36B	EL195UH070XE36B	7617584
13ACXN024-230	TXV	23,800	15.00	12.00	C33-36B	EL296UH045XE36B	7619178
13ACXN024-230	TXV	24,200	15.00	12.50	C33-36B	EL296UH045XV36B	7617700
13ACXN024-230	TXV	24,200	15.00	12.50	C33-36B	EL296UH070XE36B	7619179
13ACXN024-230	TXV	24,200	15.50	12.50	C33-36B	EL296UH070XV36B	7617618
13ACXN024-230	TXV	24,400	15.10	12.50	C33-36B	SL280UH090V36B	7617578
13ACXN024-230	TXV	24,200	15.50	12.50	C33-36B	SLP98UH070XV36B	7617579
13ACXN024-230	TXV	24,200	15.00	12.50	C33-36C	EL296UH090XV36C	7617619
13ACXN024-230	TXV	24,200	15.50	12.50	C33-36C	SLP98UH090XV36C	7617580
13ACXN024-230	TXV	24,200	14.00	11.50	C33-38		7617769
13ACXN024-230	TXV	24,400	15.50	12.50	C33-38A	EL180UH045E36A	7620217
13ACXN024-230	TXV	24,400	15.50	12.50	C33-38A	EL180UH045XE36A	7620349
13ACXN024-230	TXV	25,000	15.50	12.50	C33-38A	SL280UH070V36A	7617621
13ACXN024-230	TXV	25,000	15.50	12.50	C33-38A	SL280UH070XV36A	7617622
13ACXN024-230	TXV	24,800	15.50	12.50	C33-38B	EL180UH070E36B	7620216
13ACXN024-230	TXV	24,800	15.50	12.50	C33-38B	EL180UH070XE36B	7620378
13ACXN024-230	TXV	24,600	15.50	12.50	C33-38B	EL195UH045XE36B	7617623
13ACXN024-230	TXV	24,600	15.50	13.00	C33-38B	EL195UH070XE36B	7617624
13ACXN024-230	TXV	24,600	15.50	12.50	C33-38B	EL296UH045XE36B	7619184
13ACXN024-230	TXV	24,800	15.50	12.50	C33-38B	EL296UH045XV36B	7617632
13ACXN024-230	TXV	24,600	15.50	13.00	C33-38B	EL296UH070XE36B	7619185
13ACXN024-230	TXV	24,800	15.50	12.50	C33-38B	EL296UH070XV36B	7617633

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	25,000	15.50	12.50	C33-38B	SL280UH090V36B	7617585
13ACXN024-230	TXV	24,800	15.50	12.50	C33-38B	SLP98UH070XV36B	7617586
13ACXN024-230	TXV	23,600	13.50	11.00	C35-24A		8266922
13ACXN024-230	TXV	24,400	15.50	12.50	C35-24A	EL180UH045E36A	8266927
13ACXN024-230	TXV	24,400	15.50	12.50	C35-24A	EL180UH045XE36A	8266930
13ACXN024-230	TXV	24,200	15.00	12.50	C35-24A	SL280UH070V36A	8266931
13ACXN024-230	TXV	24,200	15.00	12.50	C35-24A	SL280UH070XV36A	8266932
13ACXN024-230	TXV	23,600	13.50	11.00	C35-24B		8269462
13ACXN024-230	TXV	24,200	15.50	12.50	C35-24B	EL180UH070E36B	8266935
13ACXN024-230	TXV	24,200	15.50	12.50	C35-24B	EL180UH070XE36B	8266936
13ACXN024-230	TXV	24,000	15.00	12.50	C35-24B	EL195UH045XE36B	8266943
13ACXN024-230	TXV	24,200	15.00	12.50	C35-24B	EL195UH070XE36B	8266944
13ACXN024-230	TXV	24,000	15.00	12.50	C35-24B	EL296UH045XE36B	8266939
13ACXN024-230	TXV	24,200	15.50	12.50	C35-24B	EL296UH045XV36B	8266945
13ACXN024-230	TXV	24,200	15.00	12.50	C35-24B	EL296UH070XE36B	8266940
13ACXN024-230	TXV	24,200	15.50	12.50	C35-24B	EL296UH070XV36B	8266946
13ACXN024-230	TXV	24,400	15.10	12.50	C35-24B	SL280UH090V36B	8266941
13ACXN024-230	TXV	24,200	15.50	12.50	C35-24B	SLP98UH070XV36B	8266942
13ACXN024-230	TXV	23,600	13.50	11.00	C35-30/36A		8267005
13ACXN024-230	TXV	24,400	15.00	12.50	C35-30/36A	EL180UH045E36A	8267008
13ACXN024-230	TXV	24,400	15.00	12.50	C35-30/36A	EL180UH045XE36A	8267010
13ACXN024-230	TXV	24,400	15.10	12.50	C35-30/36A	SL280UH070V36A	8267011
13ACXN024-230	TXV	24,400	15.10	12.50	C35-30/36A	SL280UH070XV36A	8267012
13ACXN024-230	TXV	23,600	13.50	11.00	C35-30/36B		8269464
13ACXN024-230	TXV	24,200	15.50	12.50	C35-30/36B	EL180UH070E36B	8267018
13ACXN024-230	TXV	24,200	15.50	12.50	C35-30/36B	EL180UH070XE36B	8267020
13ACXN024-230	TXV	23,800	15.00	12.00	C35-30/36B	EL195UH045XE36B	8267027
13ACXN024-230	TXV	24,200	15.00	12.50	C35-30/36B	EL195UH070XE36B	8267028
13ACXN024-230	TXV	23,800	15.00	12.00	C35-30/36B	EL296UH045XE36B	8267023
13ACXN024-230	TXV	24,200	15.00	12.50	C35-30/36B	EL296UH045XV36B	8267030
13ACXN024-230	TXV	24,200	15.00	12.50	C35-30/36B	EL296UH070XE36B	8267024
13ACXN024-230	TXV	24,200	15.50	12.50	C35-30/36B	EL296UH070XV36B	8267029
13ACXN024-230	TXV	24,400	15.10	12.50	C35-30/36B	SL280UH090V36B	8267025
13ACXN024-230	TXV	24,200	15.50	12.50	C35-30/36B	SLP98UH070XV36B	8267026
13ACXN024-230	TXV	23,600	13.50	11.00	C35-30/36C		8269465
13ACXN024-230	TXV	24,200	15.00	12.50	C35-30/36C	EL296UH090XV36C	8267041
13ACXN024-230	TXV	24,200	15.50	12.50	C35-30/36C	SLP98UH090XV36C	8267040
13ACXN024-230	TXV	24,000	13.50	11.50	C35-30A		8266956
13ACXN024-230	TXV	24,800	15.10	13.00	C35-30A	SL280UH070V36A	8266966
13ACXN024-230	TXV	24,800	15.10	13.00	C35-30A	SL280UH070XV36A	8266967
13ACXN024-230	TXV	24,000	13.50	11.50	C35-30B		8269463
13ACXN024-230	TXV	24,400	15.50	12.50	C35-30B	EL180UH070E36B	8266976
13ACXN024-230	TXV	24,400	15.50	12.50	C35-30B	EL180UH070XE36B	8266978
13ACXN024-230	TXV	24,200	15.00	12.50	C35-30B	EL195UH045XE36B	8266995
13ACXN024-230	TXV	24,400	15.50	12.50	C35-30B	EL195UH070XE36B	8266996
13ACXN024-230	TXV	24,200	15.00	12.50	C35-30B	EL296UH045XE36B	8266986
13ACXN024-230	TXV	24,600	15.50	13.00	C35-30B	EL296UH045XV36B	8266992
13ACXN024-230	TXV	24,400	15.50	12.50	C35-30B	EL296UH070XE36B	8266987
13ACXN024-230	TXV	24,600	15.50	13.00	C35-30B	EL296UH070XV36B	8266993

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	24,600	15.50	12.50	C35-30B	SLP98UH070XV36B	8266994
13ACXN024-230	TXV	24,400	15.50	12.50	C35-36A	EL180UH045E36A	8267049
13ACXN024-230	TXV	24,400	15.50	12.50	C35-36A	EL180UH045XE36A	8267052
13ACXN024-230	TXV	25,000	15.50	12.50	C35-36A	SL280UH070V36A	8267055
13ACXN024-230	TXV	25,000	15.50	12.50	C35-36A	SL280UH070XV36A	8267056
13ACXN024-230	TXV	24,800	15.50	12.50	C35-36B	EL180UH070E36B	8267068
13ACXN024-230	TXV	24,800	15.50	12.50	C35-36B	EL180UH070XE36B	8267071
13ACXN024-230	TXV	24,600	15.50	12.50	C35-36B	EL195UH045XE36B	8267086
13ACXN024-230	TXV	24,600	15.50	13.00	C35-36B	EL195UH070XE36B	8267087
13ACXN024-230	TXV	24,600	15.50	12.50	C35-36B	EL296UH045XE36B	8267081
13ACXN024-230	TXV	24,800	15.50	12.50	C35-36B	EL296UH045XV36B	8267088
13ACXN024-230	TXV	24,600	15.50	13.00	C35-36B	EL296UH070XE36B	8267082
13ACXN024-230	TXV	24,800	15.50	12.50	C35-36B	EL296UH070XV36B	8267089
13ACXN024-230	TXV	25,000	15.50	12.50	C35-36B	SL280UH090V36B	8267084
13ACXN024-230	TXV	24,800	15.50	12.50	C35-36B	SLP98UH070XV36B	8267085
13ACXN024-230	TXV	23,600	13.00	11.00	CBX25UH-024		7619776
13ACXN024-230	TXV	23,800	13.00	11.00	CBX25UH-030		7620877
13ACXN024-230	TXV	24,000	15.00	12.50	CBX25UHV-024		7622691
13ACXN024-230	TXV	24,400	15.50	12.50	CBX27UH-024		7617587
13ACXN024-230	TXV	24,600	15.50	12.50	CBX27UH-030		7617588
13ACXN024-230	TXV	23,600	13.50	11.50	CBX32M-018/024		7617589
13ACXN024-230	TXV	24,200	14.50	12.00	CBX32M-030		7617590
13ACXN024-230	TXV	24,600	14.50	12.00	CBX32M-036		7617591
13ACXN024-230	TXV	23,800	14.00	11.50	CBX32MV-018/024		7617592
13ACXN024-230	TXV	24,000	14.50	12.00	CBX32MV-024/030		7617593
13ACXN024-230	TXV	24,600	15.00	12.50	CBX32MV-036		7617594
13ACXN024-230	TXV	24,400	15.00	12.00	CBX40UHV-024		7617595
13ACXN024-230	TXV	24,200	15.00	12.00	CBX40UHV-030		7617617
13ACXN024-230	TXV	24,600	15.00	12.50	CBX40UHV-036		7617625
13ACXN024-230	TXV	23,600	13.50	11.00	CH23-41		7617770
13ACXN024-230	TXV	24,200	15.50	12.50	CH23-41	EL180UH045E36A	7620218
13ACXN024-230	TXV	24,200	15.50	12.50	CH23-41	EL180UH045XE36A	7620350
13ACXN024-230	TXV	24,600	15.50	13.00	CH23-41	EL180UH070E36B	7620215
13ACXN024-230	TXV	24,600	15.50	13.00	CH23-41	EL180UH070XE36B	7620391
13ACXN024-230	TXV	24,000	15.00	12.50	CH23-41	EL195UH045XE36B	7617626
13ACXN024-230	TXV	24,200	15.50	12.50	CH23-41	EL195UH070XE36B	7617627
13ACXN024-230	TXV	24,000	15.00	12.50	CH23-41	EL296UH045XE36B	7619186
13ACXN024-230	TXV	24,200	15.00	12.50	CH23-41	EL296UH045XV36B	7617628
13ACXN024-230	TXV	24,200	15.50	12.50	CH23-41	EL296UH070XE36B	7619187
13ACXN024-230	TXV	24,200	15.50	12.50	CH23-41	EL296UH070XV36B	7617629
13ACXN024-230	TXV	24,400	15.10	12.50	CH23-41	SL280UH070V36A	7617630
13ACXN024-230	TXV	24,400	15.10	12.50	CH23-41	SL280UH070XV36A	7617631
13ACXN024-230	TXV	24,400	15.10	12.50	CH23-41	SL280UH090V36B	7617640
13ACXN024-230	TXV	24,200	15.50	12.50	CH23-41	SLP98UH070XV36B	7617641
13ACXN024-230	TXV	23,400	13.00	11.00	CH33-19		7617771
13ACXN024-230	TXV	24,000	15.00	12.00	CH33-19	EL180UH045E36A	7620220
13ACXN024-230	TXV	24,000	15.00	12.00	CH33-19	EL180UH045XE36A	7620352
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-19	SL280UH070V36A	7617643
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-19	SL280UH070XV36A	7617644

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	23,800	14.50	12.00	CH33-24/30	EL180UH045E36A	7620221
13ACXN024-230	TXV	23,800	14.50	12.00	CH33-24/30	EL180UH045XE36A	7620353
13ACXN024-230	TXV	23,800	14.50	12.00	CH33-24/30	SL280UH070V36A	7617645
13ACXN024-230	TXV	23,800	14.50	12.00	CH33-24/30	SL280UH070XV36A	7617646
13ACXN024-230	TXV	23,800	13.50	11.00	CH33-25		7617772
13ACXN024-230	TXV	24,200	15.50	12.50	CH33-25	EL296UH045XV36B	7617660
13ACXN024-230	TXV	24,400	15.00	12.50	CH33-25A	EL180UH045E36A	7620223
13ACXN024-230	TXV	24,400	15.00	12.50	CH33-25A	EL180UH045XE36A	7620355
13ACXN024-230	TXV	24,400	15.10	12.50	CH33-25A	SL280UH070V36A	7617656
13ACXN024-230	TXV	24,400	15.10	12.50	CH33-25A	SL280UH070XV36A	7617657
13ACXN024-230	TXV	24,400	15.50	12.50	CH33-25B	EL180UH070E36B	7620229
13ACXN024-230	TXV	24,400	15.50	12.50	CH33-25B	EL180UH070XE36B	7620392
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-25B	EL195UH045XE36B	7617658
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-25B	EL195UH070XE36B	7617659
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-25B	EL296UH045XE36B	7619190
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-25B	EL296UH070XE36B	7619191
13ACXN024-230	TXV	24,200	15.50	12.50	CH33-25B	EL296UH070XV36B	7617661
13ACXN024-230	TXV	24,400	15.10	12.50	CH33-25B	SL280UH090V36B	7617662
13ACXN024-230	TXV	24,200	15.50	12.50	CH33-25B	SLP98UH070XV36B	7617663
13ACXN024-230	TXV	24,200	14.00	11.50	CH33-31		7617773
13ACXN024-230	TXV	24,800	15.50	12.50	CH33-31A	EL180UH045E36A	7620224
13ACXN024-230	TXV	24,800	15.50	12.50	CH33-31A	EL180UH045XE36A	7620610
13ACXN024-230	TXV	24,800	15.10	12.50	CH33-31A	SL280UH070V36A	7617665
13ACXN024-230	TXV	24,800	15.10	12.50	CH33-31A	SL280UH070XV36A	7617666
13ACXN024-230	TXV	24,800	15.50	12.50	CH33-31B	EL180UH070E36B	7620230
13ACXN024-230	TXV	24,800	15.50	12.50	CH33-31B	EL180UH070XE36B	7620393
13ACXN024-230	TXV	24,600	15.50	12.50	CH33-31B	EL195UH045XE36B	7617667
13ACXN024-230	TXV	24,600	15.50	13.00	CH33-31B	EL195UH070XE36B	7617668
13ACXN024-230	TXV	24,600	15.50	12.50	CH33-31B	EL296UH045XE36B	7619192
13ACXN024-230	TXV	24,800	15.50	12.50	CH33-31B	EL296UH045XV36B	7617669
13ACXN024-230	TXV	24,600	15.50	13.00	CH33-31B	EL296UH070XE36B	7619193
13ACXN024-230	TXV	24,800	15.50	12.50	CH33-31B	EL296UH070XV36B	7617670
13ACXN024-230	TXV	25,000	15.50	12.50	CH33-31B	SL280UH090V36B	7617671
13ACXN024-230	TXV	24,800	15.50	12.50	CH33-31B	SLP98UH070XV36B	7617672
13ACXN024-230	TXV	23,600	13.50	11.00	CH33-36		7617774
13ACXN024-230	TXV	24,400	15.50	13.00	CH33-36	EL296UH090XV36C	7617683
13ACXN024-230	TXV	24,400	15.50	13.00	CH33-36	SLP98UH090XV36C	7617682
13ACXN024-230	TXV	24,200	15.00	12.50	CH33-36A	EL180UH045E36A	7620225
13ACXN024-230	TXV	24,200	15.00	12.50	CH33-36A	EL180UH045XE36A	7620611
13ACXN024-230	TXV	24,200	15.00	12.20	CH33-36A	SL280UH070V36A	7617674
13ACXN024-230	TXV	24,200	15.00	12.20	CH33-36A	SL280UH070XV36A	7617675
13ACXN024-230	TXV	24,200	15.50	12.50	CH33-36B	EL180UH070E36B	7619811
13ACXN024-230	TXV	24,200	15.50	12.50	CH33-36B	EL180UH070XE36B	7620394
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-36B	EL195UH045XE36B	7617676
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-36B	EL195UH070XE36B	7617677
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-36B	EL296UH045XE36B	7619194
13ACXN024-230	TXV	24,200	15.00	12.50	CH33-36B	EL296UH045XV36B	7617678
13ACXN024-230	TXV	24,000	15.00	12.50	CH33-36B	EL296UH070XE36B	7619195
13ACXN024-230	TXV	24,200	15.50	12.50	CH33-36B	EL296UH070XV36B	7617679

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	24,400	15.10	12.50	CH33-36B	SL280UH090V36B	7617680
13ACXN024-230	TXV	24,200	15.50	12.50	CH33-36B	SLP98UH070XV36B	7617681
13ACXN024-230	TXV	23,400	13.00	11.00	CH35-18A		7622872
13ACXN024-230	TXV	24,000	15.00	12.50	CH35-18A	EL180UH045E36A	7622874
13ACXN024-230	TXV	24,000	15.00	12.50	CH35-18A	EL180UH045XE36A	7622876
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-18A	SL280UH070V36A	7622877
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-18A	SL280UH070XV36A	7622879
13ACXN024-230	TXV	23,800	13.00	11.00	CH35-24A		7622881
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24A	EL180UH045E36A	7622885
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24A	EL180UH045XE36A	7622886
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24A	SL280UH070V36A	7622888
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24A	SL280UH070XV36A	7622890
13ACXN024-230	TXV	23,800	13.00	11.00	CH35-24B		7622883
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-24B	EL180UH070E36B	7622892
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-24B	EL180UH070XE36B	7622893
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24B	EL195UH045XE36B	7622895
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24B	EL195UH070XE36B	7622897
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24B	EL296UH045XE36B	7622900
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-24B	EL296UH045XV36B	7622899
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24B	EL296UH070XE36B	7622904
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-24B	EL296UH070XV36B	7622902
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-24B	SL280UH090V36B	7622906
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-24B	SLP98UH070XV36B	7622907
13ACXN024-230	TXV	24,000	13.00	11.00	CH35-30A		7624478
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30A	EL180UH045E36A	7622909
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30A	EL180UH045XE36A	7622911
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-30A	SL280UH070V36A	7622913
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-30A	SL280UH070XV36A	7622914
13ACXN024-230	TXV	24,000	13.00	11.00	CH35-30B		7624480
13ACXN024-230	TXV	24,000	16.00	13.00	CH35-30B	EL180UH070E36B	7622916
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30B	EL180UH070XE36B	7622918
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30B	EL195UH045XE36B	7622919
13ACXN024-230	TXV	24,000	15.50	13.00	CH35-30B	EL195UH070XE36B	7622921
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30B	EL296UH045XE36B	7622924
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30B	EL296UH045XV36B	7622923
13ACXN024-230	TXV	24,000	15.50	13.00	CH35-30B	EL296UH070XE36B	7622927
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30B	EL296UH070XV36B	7622926
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30B	SL280UH090V36B	7622929
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-30B	SLP98UH070XV36B	7622931
13ACXN024-230	TXV	23,600	13.00	11.00	CH35-36A		7622933
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36A	EL180UH045E36A	7622938
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36A	EL180UH045XE36A	7622939
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36A	SL280UH070V36A	7622941
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36A	SL280UH070XV36A	7622943
13ACXN024-230	TXV	23,600	13.00	11.00	CH35-36B		7622934
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-36B	EL180UH070E36B	7622944
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-36B	EL180UH070XE36B	7622946
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36B	EL195UH045XE36B	7622947
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36B	EL195UH070XE36B	7622949

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36B	EL296UH045XE36B	7622952
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36B	EL296UH045XV36B	7622951
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36B	EL296UH070XE36B	7622956
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-36B	EL296UH070XV36B	7622954
13ACXN024-230	TXV	24,000	15.10	12.50	CH35-36B	SL280UH090V36B	7622957
13ACXN024-230	TXV	24,000	15.50	12.50	CH35-36B	SLP98UH070XV36B	7622959
13ACXN024-230	TXV	24,000	15.50	13.00	CH35-36B	SLP98UH070XV36C	7623486
13ACXN024-230	TXV	23,800	13.00	11.00	CH35-36C		7622936
13ACXN024-230	TXV	24,000	15.50	13.00	CH35-36C	EL296UH090XV36C	7622960
13ACXN024-230	TXV	22,800	13.00	10.50	CR33-24		7617775
13ACXN024-230	TXV	23,200	14.00	11.50	CR33-24	EL180DF045E36A	7620041
13ACXN024-230	TXV	22,800	14.00	11.50	CR33-24	EL180DF070E36B	7620082
13ACXN024-230	TXV	22,800	14.00	11.50	CR33-24	EL195DF045XE36B	7617686
13ACXN024-230	TXV	22,800	14.00	11.50	CR33-24	EL195DF070XE48B	7617687
13ACXN024-230	TXV	22,800	14.00	11.50	CR33-24	EL296DF045XE36B	7619196
13ACXN024-230	TXV	23,400	14.00	12.00	CR33-24	EL296DF045XV36B	7625412
13ACXN024-230	TXV	22,800	14.00	11.50	CR33-24	EL296DF070XE48B	7619197
13ACXN024-230	TXV	23,200	14.25	11.70	CR33-24	SL280DF070V36A	7617685
13ACXN024-230	TXV	23,400	14.50	12.00	CR33-24	SLP98DF070XV36B	7617688
13ACXN024-230	TXV	24,000	13.50	11.50	CR33-30/36		7617776
13ACXN024-230	TXV	24,200	15.50	12.50	CR33-30/36	EL180DF045E36A	7620043
13ACXN024-230	TXV	24,600	15.50	13.00	CR33-30/36	EL180DF070E36B	7620084
13ACXN024-230	TXV	24,200	15.00	12.50	CR33-30/36	EL195DF045XE36B	7617691
13ACXN024-230	TXV	24,400	15.50	12.50	CR33-30/36	EL195DF070XE48B	7617692
13ACXN024-230	TXV	24,200	15.00	12.50	CR33-30/36	EL296DF045XE36B	7619198
13ACXN024-230	TXV	24,600	15.50	12.50	CR33-30/36	EL296DF045XV36B	7625413
13ACXN024-230	TXV	24,400	15.50	12.50	CR33-30/36	EL296DF070XE48B	7619199
13ACXN024-230	TXV	24,600	15.00	12.50	CR33-30/36	EL296DF070XV48B	7625406
13ACXN024-230	TXV	24,400	15.00	12.50	CR33-30/36	SL280DF070V36A	7617690
13ACXN024-230	TXV	24,800	15.10	12.50	CR33-30/36	SL280DF090V48B	7617693
13ACXN024-230	TXV	24,600	15.50	12.50	CR33-30/36	SLP98DF070XV36B	7617694
13ACXN024-230	TXV	24,600	15.50	13.00	CR33-30/36	SLP98DF090XV36C	7617695
13ACXN024-230	TXV	23,200	14.00	11.50	CX34-18/24	EL180UH045E36A	7620226
13ACXN024-230	TXV	23,200	14.00	11.50	CX34-18/24	EL180UH045XE36A	7620613
13ACXN024-230	TXV	23,400	14.50	12.00	CX34-18/24	EL296UH090XV36C	7617697
13ACXN024-230	TXV	23,400	14.00	12.00	CX34-18/24	SL280UH070V36A	7617699
13ACXN024-230	TXV	23,400	14.00	12.00	CX34-18/24	SL280UH070XV36A	7617706
13ACXN024-230	TXV	23,200	14.50	12.00	CX34-18/24	SLP98UH090XV36C	7617709
13ACXN024-230	TXV	23,000	14.00	12.00	CX34-18/24B	EL180UH070E36B	7619813
13ACXN024-230	TXV	23,000	14.00	12.00	CX34-18/24B	EL180UH070XE36B	7620396
13ACXN024-230	TXV	23,000	14.00	12.00	CX34-18/24B	EL195UH045XE36B	7617710
13ACXN024-230	TXV	23,400	14.00	12.00	CX34-18/24B	EL195UH070XE36B	7617711
13ACXN024-230	TXV	23,000	14.00	12.00	CX34-18/24B	EL296UH045XE36B	7619202
13ACXN024-230	TXV	23,200	14.00	12.00	CX34-18/24B	EL296UH045XV36B	7617696
13ACXN024-230	TXV	23,400	14.00	12.00	CX34-18/24B	EL296UH070XE36B	7619203
13ACXN024-230	TXV	23,400	14.00	12.00	CX34-18/24B	EL296UH070XV36B	7617698
13ACXN024-230	TXV	23,400	14.25	12.00	CX34-18/24B	SL280UH090V36B	7617707
13ACXN024-230	TXV	23,400	14.00	12.00	CX34-18/24B	SLP98UH070XV36B	7617708
13ACXN024-230	TXV	23,400	13.00	11.00	CX34-19		7617712

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	24,000	15.00	12.00	CX34-19	EL180UH045E36A	7620257
13ACXN024-230	TXV	24,000	15.00	12.00	CX34-19	EL180UH045XE36A	7620614
13ACXN024-230	TXV	24,000	15.10	12.50	CX34-19	SL280UH070V36A	7617713
13ACXN024-230	TXV	24,000	15.10	12.50	CX34-19	SL280UH070XV36A	7617714
13ACXN024-230	TXV	23,600	13.50	11.00	CX34-25		7617715
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-25	EL180UH045E36A	7620258
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-25	EL180UH045XE36A	7620616
13ACXN024-230	TXV	24,400	15.10	12.50	CX34-25	SL280UH070V36A	7617716
13ACXN024-230	TXV	24,200	15.10	12.50	CX34-25	SL280UH070XV36A	7617717
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-25B	EL180UH070E36B	7619814
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-25B	EL180UH070XE36B	7620397
13ACXN024-230	TXV	24,000	15.00	12.50	CX34-25B	EL195UH045XE36B	7617718
13ACXN024-230	TXV	24,200	15.00	12.50	CX34-25B	EL195UH070XE36B	7617719
13ACXN024-230	TXV	24,000	15.00	12.50	CX34-25B	EL296UH045XE36B	7619204
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-25B	EL296UH045XV36B	7617720
13ACXN024-230	TXV	24,200	15.00	12.50	CX34-25B	EL296UH070XE36B	7619205
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-25B	EL296UH070XV36B	7617721
13ACXN024-230	TXV	24,400	15.10	12.50	CX34-25B	SL280UH090V36B	7617722
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-25B	SLP98UH070XV36B	7617723
13ACXN024-230	TXV	23,200	13.00	11.00	CX34-30		7617724
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30	EL180UH045E36A	7620259
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30	EL180UH045XE36A	7620617
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30	EL296UH090XV36C	7617734
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30	SL280UH070V36A	7617727
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30	SL280UH070XV36A	7617728
13ACXN024-230	TXV	23,800	14.50	12.50	CX34-30	SLP98UH090XV36C	7617731
13ACXN024-230	TXV	23,600	14.50	12.00	CX34-30B	EL180UH070E36B	7619815
13ACXN024-230	TXV	23,600	14.50	12.00	CX34-30B	EL180UH070XE36B	7620409
13ACXN024-230	TXV	23,200	14.00	12.00	CX34-30B	EL195UH045XE36B	7617732
13ACXN024-230	TXV	23,600	14.50	12.00	CX34-30B	EL195UH070XE36B	7617733
13ACXN024-230	TXV	23,200	14.00	12.00	CX34-30B	EL296UH045XE36B	7619107
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30B	EL296UH045XV36B	7617725
13ACXN024-230	TXV	23,600	14.50	12.00	CX34-30B	EL296UH070XE36B	7619108
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30B	EL296UH070XV36B	7617726
13ACXN024-230	TXV	23,800	14.50	12.20	CX34-30B	SL280UH090V36B	7617729
13ACXN024-230	TXV	23,800	14.50	12.00	CX34-30B	SLP98UH070XV36B	7617730
13ACXN024-230	TXV	24,000	13.50	11.50	CX34-31		7617735
13ACXN024-230	TXV	24,800	15.10	13.00	CX34-31	SL280UH070V36A	7617738
13ACXN024-230	TXV	24,800	15.10	13.00	CX34-31	SL280UH070XV36A	7617739
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-31B	EL180UH070E36B	7620231
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-31B	EL180UH070XE36B	7620410
13ACXN024-230	TXV	24,200	15.00	12.50	CX34-31B	EL195UH045XE36B	7617742
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-31B	EL195UH070XE36B	7617743
13ACXN024-230	TXV	24,200	15.00	12.50	CX34-31B	EL296UH045XE36B	7619109
13ACXN024-230	TXV	24,600	15.50	13.00	CX34-31B	EL296UH045XV36B	7617736
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-31B	EL296UH070XE36B	7619110
13ACXN024-230	TXV	24,600	15.50	13.00	CX34-31B	EL296UH070XV36B	7617737
13ACXN024-230	TXV	24,800	15.10	13.00	CX34-31B	SL280UH090V36B	7617740
13ACXN024-230	TXV	24,600	15.50	12.50	CX34-31B	SLP98UH070XV36B	7617741

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	23,600	13.50	11.00	CX34-36		7617744
13ACXN024-230	TXV	23,800	15.00	12.50	CX34-36	EL180UH045E36A	7620260
13ACXN024-230	TXV	23,800	15.00	12.50	CX34-36	EL180UH045XE36A	7620619
13ACXN024-230	TXV	24,200	15.00	12.50	CX34-36	EL296UH090XV36C	7617754
13ACXN024-230	TXV	24,400	15.10	12.50	CX34-36	SL280UH070V36A	7617745
13ACXN024-230	TXV	24,400	15.10	12.50	CX34-36	SL280UH070XV36A	7617746
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-36	SLP98UH090XV36C	7617753
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-36B	EL180UH070E36B	7620232
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-36B	EL180UH070XE36B	7620411
13ACXN024-230	TXV	24,000	15.00	12.50	CX34-36B	EL195UH045XE36B	7617747
13ACXN024-230	TXV	24,000	15.00	12.50	CX34-36B	EL195UH070XE36B	7617748
13ACXN024-230	TXV	24,000	15.00	12.50	CX34-36B	EL296UH045XE36B	7619111
13ACXN024-230	TXV	24,200	15.00	12.50	CX34-36B	EL296UH045XV36B	7617749
13ACXN024-230	TXV	24,000	15.00	12.50	CX34-36B	EL296UH070XE36B	7619112
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-36B	EL296UH070XV36B	7617750
13ACXN024-230	TXV	24,400	15.10	12.50	CX34-36B	SL280UH090V36B	7617751
13ACXN024-230	TXV	24,200	15.50	12.50	CX34-36B	SLP98UH070XV36B	7617752
13ACXN024-230	TXV	24,200	14.00	11.50	CX34-38		7617755
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-38	EL180UH045E36A	7619824
13ACXN024-230	TXV	24,400	15.50	12.50	CX34-38	EL180UH045XE36A	7620621
13ACXN024-230	TXV	25,000	15.50	12.50	CX34-38	SL280UH070V36A	7617756
13ACXN024-230	TXV	25,000	15.50	12.50	CX34-38	SL280UH070XV36A	7617757
13ACXN024-230	TXV	24,800	15.50	12.50	CX34-38B	EL180UH070E36B	7620233
13ACXN024-230	TXV	24,800	15.50	12.50	CX34-38B	EL180UH070XE36B	7620412
13ACXN024-230	TXV	24,600	15.50	12.50	CX34-38B	EL195UH045XE36B	7617758
13ACXN024-230	TXV	24,600	15.50	13.00	CX34-38B	EL195UH070XE36B	7617759
13ACXN024-230	TXV	24,600	15.50	12.50	CX34-38B	EL296UH045XE36B	7619113
13ACXN024-230	TXV	24,800	15.50	12.50	CX34-38B	EL296UH045XV36B	7617760
13ACXN024-230	TXV	24,600	15.50	13.00	CX34-38B	EL296UH070XE36B	7619114
13ACXN024-230	TXV	24,800	15.50	12.50	CX34-38B	EL296UH070XV36B	7617761
13ACXN024-230	TXV	25,000	15.50	12.50	CX34-38B	SL280UH090V36B	7617762
13ACXN024-230	TXV	24,800	15.50	12.50	CX34-38B	SLP98UH070XV36B	7617763
13ACXN024-230	TXV	23,200	14.00	11.50	CX35-18/24A	EL180UH045E36A	8266546
13ACXN024-230	TXV	23,200	14.00	11.50	CX35-18/24A	EL180UH045XE36A	8266545
13ACXN024-230	TXV	23,400	14.50	12.00	CX35-18/24A	EL296UH090XV36C	8266551
13ACXN024-230	TXV	23,400	14.00	12.00	CX35-18/24A	SL280UH070V36A	8266552
13ACXN024-230	TXV	23,400	14.00	12.00	CX35-18/24A	SL280UH070XV36A	8266553
13ACXN024-230	TXV	23,200	14.50	12.00	CX35-18/24A	SLP98UH090XV36C	8266549
13ACXN024-230	TXV	23,000	14.00	12.00	CX35-18/24B	EL180UH070E36B	8266557
13ACXN024-230	TXV	23,000	14.00	12.00	CX35-18/24B	EL180UH070XE36B	8266556
13ACXN024-230	TXV	23,000	14.00	12.00	CX35-18/24B	EL195UH045XE36B	8266568
13ACXN024-230	TXV	23,400	14.00	12.00	CX35-18/24B	EL195UH070XE36B	8266569
13ACXN024-230	TXV	23,000	14.00	12.00	CX35-18/24B	EL296UH045XE36B	8266564
13ACXN024-230	TXV	23,200	14.00	12.00	CX35-18/24B	EL296UH045XV36B	8266570
13ACXN024-230	TXV	23,400	14.00	12.00	CX35-18/24B	EL296UH070XE36B	8266565
13ACXN024-230	TXV	23,400	14.00	12.00	CX35-18/24B	EL296UH070XV36B	8266571
13ACXN024-230	TXV	23,400	14.25	12.00	CX35-18/24B	SL280UH090V36B	8266566
13ACXN024-230	TXV	23,400	14.00	12.00	CX35-18/24B	SLP98UH070XV36B	8266567
13ACXN024-230	TXV	23,600	13.50	11.00	CX35-24A		8266579

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-24A	EL180UH045E36A	8266585
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-24A	EL180UH045XE36A	8266584
13ACXN024-230	TXV	24,400	15.10	12.50	CX35-24A	SL280UH070V36A	8266588
13ACXN024-230	TXV	24,200	15.10	12.50	CX35-24A	SL280UH070XV36A	8266589
13ACXN024-230	TXV	23,600	13.50	11.00	CX35-24B		8269466
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-24B	EL180UH070E36B	8266593
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-24B	EL180UH070XE36B	8266592
13ACXN024-230	TXV	24,000	15.00	12.50	CX35-24B	EL195UH045XE36B	8266598
13ACXN024-230	TXV	24,200	15.00	12.50	CX35-24B	EL195UH070XE36B	8266599
13ACXN024-230	TXV	24,000	15.00	12.50	CX35-24B	EL296UH045XE36B	8266596
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-24B	EL296UH045XV36B	8266600
13ACXN024-230	TXV	24,200	15.00	12.50	CX35-24B	EL296UH070XE36B	8266597
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-24B	EL296UH070XV36B	8266601
13ACXN024-230	TXV	24,400	15.10	12.50	CX35-24B	SL280UH090V36B	8266602
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-24B	SLP98UH070XV36B	8266603
13ACXN024-230	TXV	23,600	13.50	11.00	CX35-30/36A		8266661
13ACXN024-230	TXV	23,800	15.00	12.50	CX35-30/36A	EL180UH045E36A	8266665
13ACXN024-230	TXV	23,800	15.00	12.50	CX35-30/36A	EL180UH045XE36A	8266664
13ACXN024-230	TXV	24,400	15.10	12.50	CX35-30/36A	SL280UH070V36A	8266668
13ACXN024-230	TXV	24,400	15.10	12.50	CX35-30/36A	SL280UH070XV36A	8266669
13ACXN024-230	TXV	23,600	13.50	11.00	CX35-30/36B		8269468
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-30/36B	EL180UH070E36B	8266678
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-30/36B	EL180UH070XE36B	8266675
13ACXN024-230	TXV	24,000	15.00	12.50	CX35-30/36B	EL195UH045XE36B	8266684
13ACXN024-230	TXV	24,000	15.00	12.50	CX35-30/36B	EL195UH070XE36B	8266685
13ACXN024-230	TXV	24,000	15.00	12.50	CX35-30/36B	EL296UH045XE36B	8266680
13ACXN024-230	TXV	24,200	15.00	12.50	CX35-30/36B	EL296UH045XV36B	8266686
13ACXN024-230	TXV	24,000	15.00	12.50	CX35-30/36B	EL296UH070XE36B	8266681
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-30/36B	EL296UH070XV36B	8266687
13ACXN024-230	TXV	24,400	15.10	12.50	CX35-30/36B	SL280UH090V36B	8266688
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-30/36B	SLP98UH070XV36B	8266689
13ACXN024-230	TXV	23,600	13.50	11.00	CX35-30/36C		8269469
13ACXN024-230	TXV	24,200	15.00	12.50	CX35-30/36C	EL296UH090XV36C	8266671
13ACXN024-230	TXV	24,200	15.50	12.50	CX35-30/36C	SLP98UH090XV36C	8266670
13ACXN024-230	TXV	24,000	13.50	11.50	CX35-30A		8266612
13ACXN024-230	TXV	24,800	15.10	13.00	CX35-30A	SL280UH070V36A	8266623
13ACXN024-230	TXV	24,800	15.10	13.00	CX35-30A	SL280UH070XV36A	8266624
13ACXN024-230	TXV	24,000	13.50	11.50	CX35-30B		8269467
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-30B	EL180UH070E36B	8266634
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-30B	EL180UH070XE36B	8266627
13ACXN024-230	TXV	24,200	15.00	12.50	CX35-30B	EL195UH045XE36B	8266651
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-30B	EL195UH070XE36B	8266652
13ACXN024-230	TXV	24,200	15.00	12.50	CX35-30B	EL296UH045XE36B	8266643
13ACXN024-230	TXV	24,600	15.50	13.00	CX35-30B	EL296UH045XV36B	8266647
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-30B	EL296UH070XE36B	8266644
13ACXN024-230	TXV	24,600	15.50	13.00	CX35-30B	EL296UH070XV36B	8266648
13ACXN024-230	TXV	24,800	15.10	13.00	CX35-30B	SL280UH090V36B	8266649
13ACXN024-230	TXV	24,600	15.50	12.50	CX35-30B	SLP98UH070XV36B	8266650
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-36A	EL180UH045E36A	8266705

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN024-230	TXV	24,400	15.50	12.50	CX35-36A	EL180UH045XE36A	8266704
13ACXN024-230	TXV	25,000	15.50	12.50	CX35-36A	SL280UH070V36A	8266709
13ACXN024-230	TXV	25,000	15.50	12.50	CX35-36A	SL280UH070XV36A	8266710
13ACXN024-230	TXV	24,800	15.50	12.50	CX35-36B	EL180UH070E36B	8266721
13ACXN024-230	TXV	24,800	15.50	12.50	CX35-36B	EL180UH070XE36B	8266714
13ACXN024-230	TXV	24,600	15.50	12.50	CX35-36B	EL195UH045XE36B	8266734
13ACXN024-230	TXV	24,600	15.50	13.00	CX35-36B	EL195UH070XE36B	8266735
13ACXN024-230	TXV	24,600	15.50	12.50	CX35-36B	EL296UH045XE36B	8266730
13ACXN024-230	TXV	24,800	15.50	12.50	CX35-36B	EL296UH045XV36B	8266736
13ACXN024-230	TXV	24,600	15.50	13.00	CX35-36B	EL296UH070XE36B	8266731
13ACXN024-230	TXV	24,800	15.50	12.50	CX35-36B	EL296UH070XV36B	8266737
13ACXN024-230	TXV	25,000	15.50	12.50	CX35-36B	SL280UH090V36B	8266738
13ACXN024-230	TXV	24,800	15.50	12.50	CX35-36B	SLP98UH070XV36B	8266739
13ACXN030-230	RFC	28,400	13.00	11.00	C33-19		7617314
13ACXN030-230	RFC	28,800	13.00	11.00	C33-25		7617326
13ACXN030-230	RFC	28,200	13.00	11.00	C33-30		7617343
13ACXN030-230	RFC	29,200	13.00	11.00	C33-31		7617372
13ACXN030-230	RFC	28,600	13.00	11.00	C33-36		7617390
13ACXN030-230	RFC	29,400	13.50	11.50	C33-38		7617431
13ACXN030-230	RFC	28,600	13.00	11.00	C33-42		7617440
13ACXN030-230	RFC	29,600	13.00	11.00	C33-43		7617275
13ACXN030-230	RFC	28,800	13.00	11.00	C35-24B		8269470
13ACXN030-230	RFC	28,600	13.00	11.00	C35-30/36B		8269471
13ACXN030-230	RFC	29,400	13.50	11.50	C35-36B		8269472
13ACXN030-230	RFC	28,800	13.00	11.00	CH23-41		7617778
13ACXN030-230	RFC	28,200	13.00	11.00	CH33-19		7617779
13ACXN030-230	RFC	29,000	13.00	11.00	CH33-25		7617308
13ACXN030-230	RFC	29,400	13.00	11.00	CH33-31		7617333
13ACXN030-230	RFC	28,600	13.00	11.00	CH33-36		7617353
13ACXN030-230	RFC	29,200	13.50	11.00	CH33-42B		7617380
13ACXN030-230	RFC	29,600	13.50	11.50	CH33-43		7617396
13ACXN030-230	RFC	29,600	13.50	11.50	CH33-48		7617408
13ACXN030-230	RFC	29,000	13.50	11.00	CR33-30/36		7617458
13ACXN030-230	RFC	29,800	15.00	12.50	CX34-31	SL280UH070V36A	8269475
13ACXN030-230	RFC	28,000	13.50	11.50	CX35-18/24A	SLP98UH090XV36C	8269473
13ACXN030-230	RFC	28,800	13.50	11.00	CX35-24A		8269474
13ACXN030-230	RFC	29,000	14.50	12.00	CX35-30/36A	EL195UH090XE48C	8269479
13ACXN030-230	RFC	29,000	14.50	12.00	CX35-30/36A	EL296UH090XE48C	8269476
13ACXN030-230	RFC	29,200	15.00	12.50	CX35-30/36A	EL296UH090XV36C	8269477
13ACXN030-230	RFC	29,200	15.00	12.50	CX35-30/36A	SLP98UH090XV36C	8269478
13ACXN030-230	RFC	29,600	13.50	11.50	CX35-48B		8269480
13ACXN030-230	TXV	28,400	13.00	11.00	C33-19		7617561
13ACXN030-230	TXV	28,800	14.00	12.00	C33-19	EL180UH045E36A	7620506
13ACXN030-230	TXV	28,800	14.00	12.00	C33-19	EL180UH045XE36A	7620331
13ACXN030-230	TXV	28,800	14.50	12.00	C33-19	SL280UH070V36A	7617315
13ACXN030-230	TXV	28,800	14.50	12.00	C33-19	SL280UH070XV36A	7617316
13ACXN030-230	TXV	27,800	13.50	11.50	C33-24A	EL180UH045E36A	7620503
13ACXN030-230	TXV	27,800	13.50	11.50	C33-24A	EL180UH045XE36A	7620328
13ACXN030-230	TXV	28,000	13.50	11.50	C33-24A	SL280UH070V36A	7617296

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	28,000	13.50	11.50	C33-24A	SL280UH070XV36A	7617297
13ACXN030-230	TXV	28,200	13.50	11.50	C33-24B	EL180UH070E36B	7620098
13ACXN030-230	TXV	28,200	13.50	11.50	C33-24B	EL180UH070XE36B	7620384
13ACXN030-230	TXV	27,800	13.50	11.50	C33-24B	EL180UH090E48B	7620313
13ACXN030-230	TXV	27,800	13.50	11.50	C33-24B	EL180UH090XE48B	7619862
13ACXN030-230	TXV	27,800	13.50	11.50	C33-24B	EL195UH045XE36B	7617303
13ACXN030-230	TXV	28,000	13.50	11.50	C33-24B	EL195UH070XE36B	7617304
13ACXN030-230	TXV	27,800	13.50	11.50	C33-24B	EL296UH045XE36B	7619127
13ACXN030-230	TXV	27,800	13.50	11.00	C33-24B	EL296UH045XV36B	7617312
13ACXN030-230	TXV	28,000	13.50	11.50	C33-24B	EL296UH070XE36B	7619128
13ACXN030-230	TXV	27,800	13.50	11.50	C33-24B	EL296UH070XV36B	7617313
13ACXN030-230	TXV	28,200	13.50	11.50	C33-24B	SL280UH090V36B	7617298
13ACXN030-230	TXV	28,400	13.00	11.00	C33-24B	SL280UH090V48B	7617299
13ACXN030-230	TXV	28,400	13.00	11.00	C33-24B	SL280UH090XV48B	7617300
13ACXN030-230	TXV	28,000	13.50	11.50	C33-24B	SLP98UH070XV36B	7617301
13ACXN030-230	TXV	28,000	13.50	11.50	C33-24C	SLP98UH090XV36C	7617302
13ACXN030-230	TXV	28,800	13.00	11.00	C33-25		7617562
13ACXN030-230	TXV	29,200	14.50	12.00	C33-25A	EL180UH045E36A	7620507
13ACXN030-230	TXV	29,200	14.50	12.00	C33-25A	EL180UH045XE36A	7620332
13ACXN030-230	TXV	29,400	14.50	12.00	C33-25A	SL280UH070V36A	7617324
13ACXN030-230	TXV	29,400	14.50	12.00	C33-25A	SL280UH070XV36A	7617325
13ACXN030-230	TXV	29,200	14.50	12.00	C33-25B	EL195UH045XE36B	7617327
13ACXN030-230	TXV	29,400	14.50	12.00	C33-25B	EL195UH070XE36B	7617328
13ACXN030-230	TXV	29,200	14.50	12.00	C33-25B	EL296UH045XE36B	7619131
13ACXN030-230	TXV	29,200	14.50	12.00	C33-25B	EL296UH045XV36B	7617329
13ACXN030-230	TXV	29,400	14.50	12.00	C33-25B	EL296UH070XE36B	7619132
13ACXN030-230	TXV	29,200	14.50	12.00	C33-25B	EL296UH070XV36B	7617331
13ACXN030-230	TXV	29,400	14.50	12.00	C33-25B	SL280UH090V36B	7617330
13ACXN030-230	TXV	29,600	14.50	12.00	C33-25B	SL280UH090V48B	7617332
13ACXN030-230	TXV	29,600	14.50	12.00	C33-25B	SL280UH090XV48B	7617341
13ACXN030-230	TXV	29,200	14.50	12.00	C33-25B	SLP98UH070XV36B	7617342
13ACXN030-230	TXV	28,200	13.00	11.00	C33-30		7617563
13ACXN030-230	TXV	28,400	14.00	11.50	C33-30A	EL180UH045E36A	7620523
13ACXN030-230	TXV	28,400	14.00	11.50	C33-30A	EL180UH045XE36A	7620334
13ACXN030-230	TXV	28,800	14.00	12.00	C33-30A	SL280UH070V36A	7617346
13ACXN030-230	TXV	28,800	14.00	12.00	C33-30A	SL280UH070XV36A	7617347
13ACXN030-230	TXV	28,400	14.00	12.00	C33-30B	EL180UH070E36B	7620155
13ACXN030-230	TXV	28,400	14.00	12.00	C33-30B	EL180UH070XE36B	7620388
13ACXN030-230	TXV	28,400	14.00	12.00	C33-30B	EL180UH090E48B	7620362
13ACXN030-230	TXV	28,400	14.00	12.00	C33-30B	EL180UH090XE48B	7619866
13ACXN030-230	TXV	28,400	13.50	11.50	C33-30B	EL195UH045XE36B	7617359
13ACXN030-230	TXV	28,600	13.50	11.50	C33-30B	EL195UH070XE36B	7617360
13ACXN030-230	TXV	28,400	13.50	11.50	C33-30B	EL296UH045XE36B	7619135
13ACXN030-230	TXV	28,600	14.00	11.50	C33-30B	EL296UH045XV36B	7617344
13ACXN030-230	TXV	28,600	13.50	11.50	C33-30B	EL296UH070XE36B	7619136
13ACXN030-230	TXV	28,600	14.00	12.00	C33-30B	EL296UH070XV36B	7617345
13ACXN030-230	TXV	28,800	14.00	12.00	C33-30B	SL280UH090V36B	7617348
13ACXN030-230	TXV	29,000	14.00	11.70	C33-30B	SL280UH090V48B	7617349
13ACXN030-230	TXV	29,000	14.00	11.70	C33-30B	SL280UH090XV48B	7617356

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	28,600	14.00	11.50	C33-30B	SLP98UH070XV36B	7617357
13ACXN030-230	TXV	28,800	14.00	12.00	C33-30C	EL195UH090XE48C	7617361
13ACXN030-230	TXV	28,800	14.00	12.00	C33-30C	EL296UH090XE48C	7619137
13ACXN030-230	TXV	28,600	14.00	12.00	C33-30C	SLP98UH090XV36C	7617358
13ACXN030-230	TXV	29,200	13.00	11.00	C33-31		7617564
13ACXN030-230	TXV	29,800	14.50	12.00	C33-31A	EL180UH045E36A	7621840
13ACXN030-230	TXV	29,800	14.50	12.00	C33-31A	EL180UH045XE36A	7621841
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31A	SL280UH070V36A	7617370
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31A	SL280UH070XV36A	7617371
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31B	EL180UH070E36B	7620159
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31B	EL180UH070XE36B	7620389
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31B	EL180UH090E48B	7620365
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31B	EL180UH090XE48B	7619870
13ACXN030-230	TXV	29,800	14.50	12.00	C33-31B	EL195UH045XE36B	7617373
13ACXN030-230	TXV	30,000	14.50	12.00	C33-31B	EL195UH070XE36B	7617374
13ACXN030-230	TXV	29,800	14.50	12.00	C33-31B	EL296UH045XE36B	7619140
13ACXN030-230	TXV	29,600	14.50	12.00	C33-31B	EL296UH045XV36B	7617375
13ACXN030-230	TXV	30,000	14.50	12.00	C33-31B	EL296UH070XE36B	7619141
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31B	EL296UH070XV36B	7617376
13ACXN030-230	TXV	30,000	15.00	12.50	C33-31B	SL280UH090V36B	7617386
13ACXN030-230	TXV	30,000	15.00	12.50	C33-31B	SL280UH090V48B	7617387
13ACXN030-230	TXV	30,000	15.00	12.50	C33-31B	SL280UH090XV48B	7617388
13ACXN030-230	TXV	29,800	15.00	12.50	C33-31B	SLP98UH070XV36B	7617389
13ACXN030-230	TXV	28,600	13.00	11.00	C33-36		7617565
13ACXN030-230	TXV	29,200	14.50	12.00	C33-36A	EL180UH045E36A	7620525
13ACXN030-230	TXV	29,200	14.50	12.00	C33-36A	EL180UH045XE36A	7620336
13ACXN030-230	TXV	29,200	14.50	12.00	C33-36A	SL280UH070V36A	7617391
13ACXN030-230	TXV	29,200	14.50	12.00	C33-36A	SL280UH070XV36A	7617392
13ACXN030-230	TXV	29,200	15.00	12.50	C33-36B	EL180UH070E36B	7620164
13ACXN030-230	TXV	29,200	15.00	12.50	C33-36B	EL180UH070XE36B	7620457
13ACXN030-230	TXV	29,400	15.00	12.50	C33-36B	EL180UH090E48B	7620367
13ACXN030-230	TXV	29,400	15.00	12.50	C33-36B	EL180UH090XE48B	7619876
13ACXN030-230	TXV	29,200	14.50	12.00	C33-36B	EL195UH045XE36B	7617418
13ACXN030-230	TXV	29,400	14.50	12.00	C33-36B	EL195UH070XE36B	7617419
13ACXN030-230	TXV	29,200	14.50	12.00	C33-36B	EL296UH045XE36B	7619149
13ACXN030-230	TXV	29,000	14.50	12.00	C33-36B	EL296UH045XV36B	7617420
13ACXN030-230	TXV	29,400	14.50	12.00	C33-36B	EL296UH070XE36B	7619150
13ACXN030-230	TXV	29,000	14.50	12.00	C33-36B	EL296UH070XV36B	7617421
13ACXN030-230	TXV	29,400	15.00	12.50	C33-36B	SL280UH090V36B	7617422
13ACXN030-230	TXV	29,600	14.50	12.20	C33-36B	SL280UH090V48B	7617423
13ACXN030-230	TXV	29,600	14.50	12.20	C33-36B	SL280UH090XV48B	7617424
13ACXN030-230	TXV	29,200	14.50	12.00	C33-36B	SLP98UH070XV36B	7617425
13ACXN030-230	TXV	29,000	14.50	12.00	C33-36C	EL195UH090XE48C	7617427
13ACXN030-230	TXV	29,000	14.50	12.00	C33-36C	EL296UH090XE48C	7619151
13ACXN030-230	TXV	29,200	15.00	12.50	C33-36C	EL296UH090XV36C	7617428
13ACXN030-230	TXV	29,200	15.00	12.50	C33-36C	SLP98UH090XV36C	7617426
13ACXN030-230	TXV	29,400	13.50	11.50	C33-38		7617566
13ACXN030-230	TXV	30,000	15.00	12.50	C33-38A	EL180UH045E36A	7620526
13ACXN030-230	TXV	30,000	15.00	12.50	C33-38A	EL180UH045XE36A	7620337

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	30,000	15.00	12.50	C33-38A	SL280UH070V36A	7617429
13ACXN030-230	TXV	30,000	15.00	12.50	C33-38A	SL280UH070XV36A	7617430
13ACXN030-230	TXV	30,000	15.00	12.50	C33-38B	EL180UH070E36B	7620166
13ACXN030-230	TXV	30,000	15.00	12.50	C33-38B	EL180UH070XE36B	7620357
13ACXN030-230	TXV	30,200	15.50	12.50	C33-38B	EL180UH090E48B	7620368
13ACXN030-230	TXV	30,200	15.50	12.50	C33-38B	EL180UH090XE48B	7619878
13ACXN030-230	TXV	30,000	15.00	12.00	C33-38B	EL195UH045XE36B	7617432
13ACXN030-230	TXV	30,200	15.00	12.00	C33-38B	EL195UH070XE36B	7617433
13ACXN030-230	TXV	30,000	15.00	12.00	C33-38B	EL296UH045XE36B	7619152
13ACXN030-230	TXV	29,800	15.00	12.00	C33-38B	EL296UH045XV36B	7617434
13ACXN030-230	TXV	30,200	15.00	12.00	C33-38B	EL296UH070XE36B	7619153
13ACXN030-230	TXV	29,800	15.00	12.50	C33-38B	EL296UH070XV36B	7617435
13ACXN030-230	TXV	30,200	15.50	12.50	C33-38B	SL280UH090V36B	7617436
13ACXN030-230	TXV	30,200	15.00	12.50	C33-38B	SL280UH090V48B	7617437
13ACXN030-230	TXV	30,200	15.00	12.50	C33-38B	SL280UH090XV48B	7617438
13ACXN030-230	TXV	30,000	15.00	12.50	C33-38B	SLP98UH070XV36B	7617439
13ACXN030-230	TXV	28,600	13.00	11.00	C33-42		7617567
13ACXN030-230	TXV	29,200	15.00	12.50	C33-42	EL180UH070E36B	7620168
13ACXN030-230	TXV	29,200	15.00	12.50	C33-42	EL180UH070XE36B	7620358
13ACXN030-230	TXV	29,400	15.00	12.50	C33-42	EL180UH090E48B	7620369
13ACXN030-230	TXV	29,400	15.00	12.50	C33-42	EL180UH090XE48B	7619880
13ACXN030-230	TXV	29,200	14.50	12.00	C33-42	EL195UH045XE36B	7617441
13ACXN030-230	TXV	29,400	14.50	12.00	C33-42	EL195UH070XE36B	7617442
13ACXN030-230	TXV	29,200	14.50	12.00	C33-42	EL296UH045XE36B	7619154
13ACXN030-230	TXV	29,000	14.50	12.00	C33-42	EL296UH045XV36B	7617443
13ACXN030-230	TXV	29,400	14.50	12.00	C33-42	EL296UH070XE36B	7619155
13ACXN030-230	TXV	29,000	14.50	12.00	C33-42	EL296UH070XV36B	7617444
13ACXN030-230	TXV	29,400	15.00	12.50	C33-42	SL280UH090V36B	7617445
13ACXN030-230	TXV	29,600	14.50	12.20	C33-42	SL280UH090V48B	7617456
13ACXN030-230	TXV	29,600	14.50	12.20	C33-42	SL280UH090XV48B	7617265
13ACXN030-230	TXV	29,200	14.50	12.00	C33-42	SLP98UH070XV36B	7617266
13ACXN030-230	TXV	29,600	13.00	11.00	C33-43		7617568
13ACXN030-230	TXV	30,200	15.50	12.50	C33-43	EL296UH090XE48C	7619123
13ACXN030-230	TXV	30,200	15.50	12.50	C33-43B	EL180UH070E36B	7620094
13ACXN030-230	TXV	30,200	15.50	12.50	C33-43B	EL180UH070XE36B	7620382
13ACXN030-230	TXV	30,400	15.50	12.50	C33-43B	EL180UH090E48B	7620311
13ACXN030-230	TXV	30,400	15.50	12.50	C33-43B	EL180UH090XE48B	7619859
13ACXN030-230	TXV	30,200	15.00	12.50	C33-43B	EL195UH045XE36B	7617267
13ACXN030-230	TXV	30,400	15.00	12.50	C33-43B	EL195UH070XE36B	7617268
13ACXN030-230	TXV	30,200	15.00	12.50	C33-43B	EL296UH045XE36B	7619121
13ACXN030-230	TXV	30,000	15.00	12.50	C33-43B	EL296UH045XV36B	7617269
13ACXN030-230	TXV	30,400	15.00	12.50	C33-43B	EL296UH070XE36B	7619122
13ACXN030-230	TXV	30,000	15.00	12.50	C33-43B	EL296UH070XV36B	7617270
13ACXN030-230	TXV	30,200	15.50	12.50	C33-43B	SL280UH090V36B	7617271
13ACXN030-230	TXV	30,400	15.00	12.50	C33-43B	SL280UH090V48B	7617272
13ACXN030-230	TXV	30,400	15.00	12.50	C33-43B	SL280UH090XV48B	7617273
13ACXN030-230	TXV	30,200	15.00	12.50	C33-43B	SLP98UH070XV36B	7617274
13ACXN030-230	TXV	30,200	15.50	12.50	C33-43C	EL195UH090XE48C	7617276
13ACXN030-230	TXV	30,200	15.50	12.50	C33-43C	EL296UH090XV36C	7617277

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	30,200	15.50	12.50	C33-43C	SLP98UH090XV36C	7617278
13ACXN030-230	TXV	28,800	13.00	11.00	C35-24A		8266924
13ACXN030-230	TXV	29,200	14.50	12.00	C35-24A	EL180UH045E36A	8266926
13ACXN030-230	TXV	29,200	14.50	12.00	C35-24A	EL180UH045XE36A	8266929
13ACXN030-230	TXV	29,400	14.50	12.00	C35-24A	SL280UH070V36A	8266933
13ACXN030-230	TXV	29,400	14.50	12.00	C35-24A	SL280UH070XV36A	8266934
13ACXN030-230	TXV	29,200	14.50	12.00	C35-24B	EL195UH045XE36B	8266947
13ACXN030-230	TXV	29,400	14.50	12.00	C35-24B	EL195UH070XE36B	8266948
13ACXN030-230	TXV	29,200	14.50	12.00	C35-24B	EL296UH045XE36B	8266937
13ACXN030-230	TXV	29,200	14.50	12.00	C35-24B	EL296UH045XV36B	8266949
13ACXN030-230	TXV	29,400	14.50	12.00	C35-24B	EL296UH070XE36B	8266938
13ACXN030-230	TXV	29,200	14.50	12.00	C35-24B	EL296UH070XV36B	8266951
13ACXN030-230	TXV	29,400	14.50	12.00	C35-24B	SL280UH090V36B	8266950
13ACXN030-230	TXV	29,600	14.50	12.00	C35-24B	SL280UH090V48B	8266952
13ACXN030-230	TXV	29,600	14.50	12.00	C35-24B	SL280UH090XV48B	8266953
13ACXN030-230	TXV	29,200	14.50	12.00	C35-24B	SLP98UH070XV36B	8266954
13ACXN030-230	TXV	28,600	13.00	11.00	C35-30/36A		8267006
13ACXN030-230	TXV	29,200	14.50	12.00	C35-30/36A	EL180UH045E36A	8267007
13ACXN030-230	TXV	29,200	14.50	12.00	C35-30/36A	EL180UH045XE36A	8267009
13ACXN030-230	TXV	29,200	14.50	12.00	C35-30/36A	SL280UH070V36A	8267013
13ACXN030-230	TXV	29,200	14.50	12.00	C35-30/36A	SL280UH070XV36A	8267014
13ACXN030-230	TXV	29,200	15.00	12.50	C35-30/36B	EL180UH070E36B	8267017
13ACXN030-230	TXV	29,200	15.00	12.50	C35-30/36B	EL180UH070XE36B	8267015
13ACXN030-230	TXV	29,400	15.00	12.50	C35-30/36B	EL180UH090E48B	8267019
13ACXN030-230	TXV	29,400	15.00	12.50	C35-30/36B	EL180UH090XE48B	8267016
13ACXN030-230	TXV	29,200	14.50	12.00	C35-30/36B	EL195UH045XE36B	8267031
13ACXN030-230	TXV	29,400	14.50	12.00	C35-30/36B	EL195UH070XE36B	8267032
13ACXN030-230	TXV	29,200	14.50	12.00	C35-30/36B	EL296UH045XE36B	8267021
13ACXN030-230	TXV	29,000	14.50	12.00	C35-30/36B	EL296UH045XV36B	8267033
13ACXN030-230	TXV	29,400	14.50	12.00	C35-30/36B	EL296UH070XE36B	8267022
13ACXN030-230	TXV	29,000	14.50	12.00	C35-30/36B	EL296UH070XV36B	8267034
13ACXN030-230	TXV	29,400	15.00	12.50	C35-30/36B	SL280UH090V36B	8267035
13ACXN030-230	TXV	29,600	14.50	12.20	C35-30/36B	SL280UH090V48B	8267036
13ACXN030-230	TXV	29,600	14.50	12.20	C35-30/36B	SL280UH090XV48B	8267037
13ACXN030-230	TXV	29,200	14.50	12.00	C35-30/36B	SLP98UH070XV36B	8267038
13ACXN030-230	TXV	29,000	14.50	12.00	C35-30/36C	EL195UH090XE48C	8267043
13ACXN030-230	TXV	29,000	14.50	12.00	C35-30/36C	EL296UH090XE48C	8267039
13ACXN030-230	TXV	29,200	15.00	12.50	C35-30/36C	EL296UH090XV36C	8267044
13ACXN030-230	TXV	29,200	15.00	12.50	C35-30/36C	SLP98UH090XV36C	8267042
13ACXN030-230	TXV	29,200	13.00	11.00	C35-30A		8266957
13ACXN030-230	TXV	29,800	14.50	12.00	C35-30A	EL180UH045E36A	8266959
13ACXN030-230	TXV	29,800	14.50	12.00	C35-30A	EL180UH045XE36A	8266960
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30A	SL280UH070V36A	8266968
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30A	SL280UH070XV36A	8266969
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30B	EL180UH070E36B	8266975
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30B	EL180UH070XE36B	8266979
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30B	EL180UH090E48B	8266977
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30B	EL180UH090XE48B	8266973
13ACXN030-230	TXV	29,800	14.50	12.00	C35-30B	EL195UH045XE36B	8266997

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	30,000	14.50	12.00	C35-30B	EL195UH070XE36B	8266998
13ACXN030-230	TXV	29,800	14.50	12.00	C35-30B	EL296UH045XE36B	8266984
13ACXN030-230	TXV	29,600	14.50	12.00	C35-30B	EL296UH045XV36B	8266999
13ACXN030-230	TXV	30,000	14.50	12.00	C35-30B	EL296UH070XE36B	8266985
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30B	EL296UH070XV36B	8267000
13ACXN030-230	TXV	30,000	15.00	12.50	C35-30B	SL280UH090V36B	8267001
13ACXN030-230	TXV	30,000	15.00	12.50	C35-30B	SL280UH090V48B	8267002
13ACXN030-230	TXV	30,000	15.00	12.50	C35-30B	SL280UH090XV48B	8267003
13ACXN030-230	TXV	29,800	15.00	12.50	C35-30B	SLP98UH070XV36B	8267004
13ACXN030-230	TXV	29,400	13.50	11.50	C35-36A		8267046
13ACXN030-230	TXV	30,000	15.00	12.50	C35-36A	EL180UH045E36A	8267047
13ACXN030-230	TXV	30,000	15.00	12.50	C35-36A	EL180UH045XE36A	8267051
13ACXN030-230	TXV	30,000	15.00	12.50	C35-36A	SL280UH070V36A	8267057
13ACXN030-230	TXV	30,000	15.00	12.50	C35-36A	SL280UH070XV36A	8267058
13ACXN030-230	TXV	30,000	15.00	12.50	C35-36B	EL180UH070E36B	8267067
13ACXN030-230	TXV	30,000	15.00	12.50	C35-36B	EL180UH070XE36B	8267069
13ACXN030-230	TXV	30,200	15.50	12.50	C35-36B	EL180UH090E48B	8267070
13ACXN030-230	TXV	30,200	15.50	12.50	C35-36B	EL180UH090XE48B	8267064
13ACXN030-230	TXV	30,000	15.00	12.00	C35-36B	EL195UH045XE36B	8267090
13ACXN030-230	TXV	30,200	15.00	12.00	C35-36B	EL195UH070XE36B	8267091
13ACXN030-230	TXV	30,000	15.00	12.00	C35-36B	EL296UH045XE36B	8267079
13ACXN030-230	TXV	29,800	15.00	12.00	C35-36B	EL296UH045XV36B	8267092
13ACXN030-230	TXV	30,200	15.00	12.00	C35-36B	EL296UH070XE36B	8267080
13ACXN030-230	TXV	29,800	15.00	12.50	C35-36B	EL296UH070XV36B	8267093
13ACXN030-230	TXV	30,200	15.50	12.50	C35-36B	SL280UH090V36B	8267094
13ACXN030-230	TXV	30,200	15.00	12.50	C35-36B	SL280UH090V48B	8267095
13ACXN030-230	TXV	30,200	15.00	12.50	C35-36B	SL280UH090XV48B	8267096
13ACXN030-230	TXV	30,000	15.00	12.50	C35-36B	SLP98UH070XV36B	8267097
13ACXN030-230	TXV	29,600	13.00	11.00	C35-48B		8267102
13ACXN030-230	TXV	30,200	15.50	12.50	C35-48B	EL180UH070E36B	8267145
13ACXN030-230	TXV	30,200	15.50	12.50	C35-48B	EL180UH070XE36B	8267148
13ACXN030-230	TXV	30,400	15.50	12.50	C35-48B	EL180UH090E48B	8267147
13ACXN030-230	TXV	30,400	15.50	12.50	C35-48B	EL180UH090XE48B	8267143
13ACXN030-230	TXV	30,200	15.00	12.50	C35-48B	EL195UH045XE36B	8267158
13ACXN030-230	TXV	30,400	15.00	12.50	C35-48B	EL195UH070XE36B	8267159
13ACXN030-230	TXV	30,200	15.00	12.50	C35-48B	EL296UH045XE36B	8267156
13ACXN030-230	TXV	30,000	15.00	12.50	C35-48B	EL296UH045XV36B	8267160
13ACXN030-230	TXV	30,400	15.00	12.50	C35-48B	EL296UH070XE36B	8267157
13ACXN030-230	TXV	30,000	15.00	12.50	C35-48B	EL296UH070XV36B	8267161
13ACXN030-230	TXV	30,200	15.50	12.50	C35-48B	SL280UH090V36B	8267162
13ACXN030-230	TXV	30,400	15.00	12.50	C35-48B	SL280UH090V48B	8267163
13ACXN030-230	TXV	30,400	15.00	12.50	C35-48B	SL280UH090XV48B	8267164
13ACXN030-230	TXV	30,200	15.00	12.50	C35-48B	SLP98UH070XV36B	8267165
13ACXN030-230	TXV	30,200	15.50	12.50	C35-48C	EL195UH090XE48C	8267166
13ACXN030-230	TXV	30,200	15.50	12.50	C35-48C	EL296UH090XE48C	8267126
13ACXN030-230	TXV	30,200	15.50	12.50	C35-48C	EL296UH090XV36C	8267167
13ACXN030-230	TXV	30,200	15.50	12.50	C35-48C	SLP98UH090XV36C	8267168
13ACXN030-230	TXV	28,800	13.00	11.00	CBX25UH-030		7619777
13ACXN030-230	TXV	29,200	13.50	11.50	CBX25UH-036		7622710

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,400	14.50	12.20	CBX25UHV-030		7622692
13ACXN030-230	TXV	29,600	15.00	12.50	CBX27UH-030		7617279
13ACXN030-230	TXV	29,800	15.00	12.50	CBX27UH-036		7617280
13ACXN030-230	TXV	28,200	13.00	11.00	CBX32M-018/024		7617283
13ACXN030-230	TXV	29,400	14.00	12.00	CBX32M-030		7617281
13ACXN030-230	TXV	29,200	14.00	11.50	CBX32M-036		7617282
13ACXN030-230	TXV	29,200	14.00	11.50	CBX32MV-024/030		7617284
13ACXN030-230	TXV	29,600	14.50	12.00	CBX32MV-036		7617285
13ACXN030-230	TXV	29,400	14.50	12.00	CBX40UHV-030		7617286
13ACXN030-230	TXV	29,600	14.50	12.00	CBX40UHV-036		7617287
13ACXN030-230	TXV	28,800	13.00	11.00	CH23-41		7617446
13ACXN030-230	TXV	29,600	14.50	12.00	CH23-41	EL180UH045E36A	7620502
13ACXN030-230	TXV	29,600	14.50	12.00	CH23-41	EL180UH045XE36A	7620327
13ACXN030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH070E36B	7620096
13ACXN030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH070XE36B	7620383
13ACXN030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH090E48B	7620312
13ACXN030-230	TXV	29,800	15.00	12.50	CH23-41	EL180UH090XE48B	7619861
13ACXN030-230	TXV	29,600	14.50	12.00	CH23-41	EL195UH045XE36B	7617288
13ACXN030-230	TXV	29,600	14.50	12.00	CH23-41	EL195UH070XE36B	7617289
13ACXN030-230	TXV	29,400	15.00	12.50	CH23-41	EL195UH090XE48C	7617290
13ACXN030-230	TXV	29,600	14.50	12.00	CH23-41	EL296UH045XE36B	7619124
13ACXN030-230	TXV	29,400	14.50	12.50	CH23-41	EL296UH045XV36B	7617291
13ACXN030-230	TXV	29,600	14.50	12.00	CH23-41	EL296UH070XE36B	7619125
13ACXN030-230	TXV	29,400	15.00	12.50	CH23-41	EL296UH070XV36B	7617292
13ACXN030-230	TXV	29,400	15.00	12.50	CH23-41	EL296UH090XE48C	7619126
13ACXN030-230	TXV	29,600	15.00	12.50	CH23-41	SL280UH070V36A	7617293
13ACXN030-230	TXV	29,600	15.00	12.50	CH23-41	SL280UH070XV36A	7617294
13ACXN030-230	TXV	29,600	15.00	12.50	CH23-41	SL280UH090V36B	7617295
13ACXN030-230	TXV	29,400	15.00	12.50	CH23-41	SLP98UH070XV36B	7617305
13ACXN030-230	TXV	28,200	13.00	11.00	CH33-19		7617447
13ACXN030-230	TXV	28,600	14.00	11.50	CH33-19	EL180UH045E36A	7620504
13ACXN030-230	TXV	28,600	14.00	11.50	CH33-19	EL180UH045XE36A	7620329
13ACXN030-230	TXV	28,800	14.00	12.00	CH33-19	SL280UH070V36A	7617306
13ACXN030-230	TXV	28,800	14.00	12.00	CH33-19	SL280UH070XV36A	7617307
13ACXN030-230	TXV	29,000	13.00	11.00	CH33-25		7617448
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-25A	EL180UH045E36A	7620505
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-25A	EL180UH045XE36A	7620330
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-25A	SL280UH070V36A	7617309
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-25A	SL280UH070XV36A	7617311
13ACXN030-230	TXV	29,200	15.00	12.50	CH33-25B	EL180UH070E36B	7620151
13ACXN030-230	TXV	29,200	15.00	12.50	CH33-25B	EL180UH070XE36B	7620385
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-25B	EL180UH090E48B	7620314
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-25B	EL180UH090XE48B	7619864
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-25B	EL195UH045XE36B	7617310
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-25B	EL195UH070XE36B	7617317
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-25B	EL296UH045XE36B	7619129
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-25B	EL296UH045XV36B	7617318
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-25B	EL296UH070XE36B	7619130
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-25B	EL296UH070XV36B	7617319

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-25B	SL280UH090V36B	7617320
13ACXN030-230	TXV	29,600	14.50	12.20	CH33-25B	SL280UH090V48B	7617321
13ACXN030-230	TXV	29,600	14.50	12.20	CH33-25B	SL280UH090XV48B	7617322
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-25B	SLP98UH070XV36B	7617323
13ACXN030-230	TXV	29,400	13.00	11.00	CH33-31		7617449
13ACXN030-230	TXV	29,800	14.50	12.00	CH33-31A	EL180UH045E36A	7620508
13ACXN030-230	TXV	29,800	14.50	12.00	CH33-31A	EL180UH045XE36A	7620333
13ACXN030-230	TXV	29,800	15.00	12.00	CH33-31A	SL280UH070V36A	7617334
13ACXN030-230	TXV	29,800	15.00	12.00	CH33-31A	SL280UH070XV36A	7617335
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-31B	EL180UH070E36B	7620153
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-31B	EL180UH070XE36B	7620386
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-31B	EL180UH090E48B	7620315
13ACXN030-230	TXV	30,000	14.50	12.00	CH33-31B	EL195UH045XE36B	7617337
13ACXN030-230	TXV	30,200	15.00	12.50	CH33-31B	EL195UH070XE36B	7617338
13ACXN030-230	TXV	30,000	14.50	12.00	CH33-31B	EL296UH045XE36B	7619133
13ACXN030-230	TXV	29,800	15.00	12.00	CH33-31B	EL296UH045XV36B	7617339
13ACXN030-230	TXV	30,200	15.00	12.50	CH33-31B	EL296UH070XE36B	7619134
13ACXN030-230	TXV	29,800	15.00	12.50	CH33-31B	EL296UH070XV36B	7617340
13ACXN030-230	TXV	30,200	15.50	12.50	CH33-31B	SL280UH090V36B	7617350
13ACXN030-230	TXV	30,200	15.00	12.50	CH33-31B	SL280UH090V48B	7617351
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-31B	SL280UH090XV48B	7617336
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-31B	SLP98UH070XV36B	7617352
13ACXN030-230	TXV	28,600	13.00	11.00	CH33-36		7617450
13ACXN030-230	TXV	29,000	14.50	12.00	CH33-36A	EL180UH045E36A	7620524
13ACXN030-230	TXV	29,000	14.50	12.00	CH33-36A	EL180UH045XE36A	7620335
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-36A	SL280UH070V36A	7617354
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-36A	SL280UH070XV36A	7617355
13ACXN030-230	TXV	29,200	14.50	12.50	CH33-36B	EL180UH070E36B	7620157
13ACXN030-230	TXV	29,200	14.50	12.50	CH33-36B	EL180UH070XE36B	7620387
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-36B	EL180UH090E48B	7620363
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-36B	EL180UH090XE48B	7619868
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-36B	EL195UH045XE36B	7617363
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-36B	EL195UH070XE36B	7617364
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-36B	EL296UH045XE36B	7619138
13ACXN030-230	TXV	29,000	14.50	12.00	CH33-36B	EL296UH045XV36B	7617365
13ACXN030-230	TXV	29,400	14.50	12.00	CH33-36B	EL296UH070XE36B	7619139
13ACXN030-230	TXV	29,000	14.50	12.00	CH33-36B	EL296UH070XV36B	7617366
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-36B	SL280UH090V36B	7617367
13ACXN030-230	TXV	29,600	14.50	12.20	CH33-36B	SL280UH090V48B	7617368
13ACXN030-230	TXV	29,600	14.50	12.20	CH33-36B	SL280UH090XV48B	7617362
13ACXN030-230	TXV	29,200	14.50	12.00	CH33-36B	SLP98UH070XV36B	7617369
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-36C	EL195UH090XE48C	7617377
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-36C	EL296UH090XE48C	7619142
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-36C	EL296UH090XV36C	7617379
13ACXN030-230	TXV	29,400	15.00	12.50	CH33-36C	SLP98UH090XV36C	7617378
13ACXN030-230	TXV	29,200	13.50	11.00	CH33-42		7617451
13ACXN030-230	TXV	29,800	15.00	12.50	CH33-42B	EL180UH070E36B	7620161
13ACXN030-230	TXV	29,800	15.00	12.50	CH33-42B	EL180UH070XE36B	7620390
13ACXN030-230	TXV	29,800	15.00	12.50	CH33-42B	EL180UH090E48B	7620364

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,800	15.00	12.50	CH33-42B	EL180UH090XE48B	7619872
13ACXN030-230	TXV	29,800	14.50	12.00	CH33-42B	EL195UH045XE36B	7617381
13ACXN030-230	TXV	29,800	14.50	12.00	CH33-42B	EL195UH070XE36B	7617382
13ACXN030-230	TXV	29,800	14.50	12.00	CH33-42B	EL296UH045XE36B	7619143
13ACXN030-230	TXV	29,600	14.50	12.00	CH33-42B	EL296UH045XV36B	7617383
13ACXN030-230	TXV	29,800	14.50	12.00	CH33-42B	EL296UH070XE36B	7619144
13ACXN030-230	TXV	29,600	15.00	12.50	CH33-42B	EL296UH070XV36B	7617384
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-42B	SL280UH090V36B	7617385
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-42B	SL280UH090V48B	7617393
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-42B	SL280UH090XV48B	7617394
13ACXN030-230	TXV	29,800	15.00	12.50	CH33-42B	SLP98UH070XV36B	7617395
13ACXN030-230	TXV	29,600	13.50	11.50	CH33-43		7617452
13ACXN030-230	TXV	30,400	15.50	12.50	CH33-43B	EL180UH070E36B	7620163
13ACXN030-230	TXV	30,400	15.50	12.50	CH33-43B	EL180UH070XE36B	7620456
13ACXN030-230	TXV	30,600	15.50	12.50	CH33-43B	EL180UH090E48B	7620366
13ACXN030-230	TXV	30,600	15.50	12.50	CH33-43B	EL180UH090XE48B	7619874
13ACXN030-230	TXV	30,400	15.00	12.50	CH33-43B	EL195UH045XE36B	7617397
13ACXN030-230	TXV	30,600	15.00	12.50	CH33-43B	EL195UH070XE36B	7617398
13ACXN030-230	TXV	30,400	15.00	12.50	CH33-43B	EL296UH045XE36B	7619145
13ACXN030-230	TXV	30,200	15.00	12.50	CH33-43B	EL296UH045XV36B	7617399
13ACXN030-230	TXV	30,600	15.00	12.50	CH33-43B	EL296UH070XE36B	7619146
13ACXN030-230	TXV	30,200	15.50	12.50	CH33-43B	EL296UH070XV36B	7617400
13ACXN030-230	TXV	30,600	15.50	13.00	CH33-43B	SL280UH090V36B	7617401
13ACXN030-230	TXV	30,800	15.50	12.50	CH33-43B	SL280UH090V48B	7617402
13ACXN030-230	TXV	30,600	15.10	12.50	CH33-43B	SL280UH090XV48B	7617403
13ACXN030-230	TXV	30,400	15.00	12.50	CH33-43B	SLP98UH070XV36B	7617404
13ACXN030-230	TXV	30,200	15.00	12.50	CH33-43C	EL195UH090XE48C	7617405
13ACXN030-230	TXV	30,200	15.00	12.50	CH33-43C	EL296UH090XE48C	7619147
13ACXN030-230	TXV	30,200	15.50	12.50	CH33-43C	EL296UH090XV36C	7617406
13ACXN030-230	TXV	30,200	15.50	12.50	CH33-43C	SLP98UH090XV36C	7617407
13ACXN030-230	TXV	29,600	13.50	11.50	CH33-48		7617453
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-48	EL296UH090XV36C	7617409
13ACXN030-230	TXV	30,000	15.00	12.50	CH33-48	SLP98UH090XV36C	7617410
13ACXN030-230	TXV	28,400	13.00	11.00	CH35-18A		7622962
13ACXN030-230	TXV	28,800	14.25	12.00	CH35-18A	EL180UH045E36A	7622964
13ACXN030-230	TXV	28,800	14.25	12.00	CH35-18A	EL180UH045XE36A	7622966
13ACXN030-230	TXV	29,000	14.25	12.00	CH35-18A	SL280UH070V36A	7622967
13ACXN030-230	TXV	29,000	14.25	12.00	CH35-18A	SL280UH070XV36A	7622969
13ACXN030-230	TXV	29,000	13.00	11.00	CH35-24A		7622971
13ACXN030-230	TXV	29,400	14.50	12.20	CH35-24A	EL180UH045E36A	7622974
13ACXN030-230	TXV	29,400	14.50	12.20	CH35-24A	EL180UH045XE36A	7622976
13ACXN030-230	TXV	29,600	14.50	12.20	CH35-24A	SL280UH070V36A	7622977
13ACXN030-230	TXV	29,600	14.50	12.20	CH35-24A	SL280UH070XV36A	7622979
13ACXN030-230	TXV	28,800	13.00	11.00	CH35-24B		7622972
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH070E36B	7622990
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH070XE36B	7622992
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH090E48B	7622993
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-24B	EL180UH090XE48B	7622995
13ACXN030-230	TXV	29,400	14.50	12.20	CH35-24B	EL195UH045XE36B	7622980

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,600	14.50	12.20	CH35-24B	EL195UH070XE36B	7622982
13ACXN030-230	TXV	29,400	14.50	12.20	CH35-24B	EL296UH045XE36B	7622984
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-24B	EL296UH045XV36B	7622987
13ACXN030-230	TXV	29,600	14.50	12.20	CH35-24B	EL296UH070XE36B	7622985
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-24B	EL296UH070XV36B	7622989
13ACXN030-230	TXV	29,600	15.00	12.50	CH35-24B	SL280UH090V36B	7622997
13ACXN030-230	TXV	29,800	14.50	12.20	CH35-24B	SL280UH090V48B	7623488
13ACXN030-230	TXV	29,800	14.50	12.20	CH35-24B	SL280UH090XV48B	7623489
13ACXN030-230	TXV	29,400	14.50	12.20	CH35-24B	SLP98UH070XV36B	7622998
13ACXN030-230	TXV	29,400	13.00	11.50	CH35-30A		7623000
13ACXN030-230	TXV	29,800	14.50	12.20	CH35-30A	EL180UH045E36A	7623003
13ACXN030-230	TXV	30,000	15.00	12.50	CH35-30A	SL280UH070V36A	7623007
13ACXN030-230	TXV	30,000	15.00	12.50	CH35-30A	SL280UH070XV36A	7623008
13ACXN030-230	TXV	29,600	13.00	11.50	CH35-30B		7623002
13ACXN030-230	TXV	29,800	14.50	12.20	CH35-30B	EL180UH045XE36A	7623005
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH070E36B	7623020
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH070XE36B	7623021
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH090E48B	7623023
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	EL180UH090XE48B	7623025
13ACXN030-230	TXV	30,000	15.00	12.20	CH35-30B	EL195UH045XE36B	7623010
13ACXN030-230	TXV	30,000	15.00	12.20	CH35-30B	EL195UH070XE36B	7623012
13ACXN030-230	TXV	30,000	15.00	12.20	CH35-30B	EL296UH045XE36B	7623013
13ACXN030-230	TXV	29,800	15.00	12.20	CH35-30B	EL296UH045XV36B	7623016
13ACXN030-230	TXV	30,000	15.00	12.20	CH35-30B	EL296UH070XE36B	7623015
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	EL296UH070XV36B	7623018
13ACXN030-230	TXV	30,000	15.50	12.50	CH35-30B	SL280UH090V36B	7623026
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	SL280UH090V48B	7623491
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	SL280UH090XV48B	7623492
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-30B	SLP98UH070XV36B	7623028
13ACXN030-230	TXV	28,800	13.00	11.00	CH35-36A		7623030
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-36A	EL180UH045E36A	7623035
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-36A	EL180UH045XE36A	7623036
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-36A	SL280UH070V36A	7623038
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-36A	SL280UH070XV36A	7623040
13ACXN030-230	TXV	28,800	13.00	11.00	CH35-36B		7623031
13ACXN030-230	TXV	29,200	15.00	12.50	CH35-36B	EL180UH070E36B	7623051
13ACXN030-230	TXV	29,200	15.00	12.50	CH35-36B	EL180UH070XE36B	7623053
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-36B	EL180UH090E48B	7623054
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-36B	EL180UH090XE48B	7623056
13ACXN030-230	TXV	29,200	14.50	12.00	CH35-36B	EL195UH045XE36B	7623041
13ACXN030-230	TXV	29,400	14.50	12.00	CH35-36B	EL195UH070XE36B	7623043
13ACXN030-230	TXV	29,200	14.50	12.00	CH35-36B	EL296UH045XE36B	7623045
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-36B	EL296UH045XV36B	7623048
13ACXN030-230	TXV	29,400	14.50	12.00	CH35-36B	EL296UH070XE36B	7623046
13ACXN030-230	TXV	29,200	14.50	12.20	CH35-36B	EL296UH070XV36B	7623049
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-36B	SL280UH090V36B	7623058
13ACXN030-230	TXV	29,600	14.50	12.20	CH35-36B	SL280UH090V48B	7623494
13ACXN030-230	TXV	29,600	14.50	12.20	CH35-36B	SL280UH090XV48B	7623496
13ACXN030-230	TXV	29,400	14.50	12.20	CH35-36B	SLP98UH070XV36B	7623059

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,000	13.00	11.00	CH35-36C		7623033
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-36C	EL195UH090XE48C	7623061
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-36C	EL296UH090XE48C	7623062
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-36C	EL296UH090XV36C	7623064
13ACXN030-230	TXV	29,400	15.00	12.50	CH35-36C	SLP98UH090XV36C	7623066
13ACXN030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH070E36B	7623077
13ACXN030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH070XE36B	7623079
13ACXN030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH090E48B	7623080
13ACXN030-230	TXV	30,000	15.50	12.50	CH35-42B	EL180UH090XE48B	7623082
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	EL195UH045XE36B	7623067
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	EL195UH070XE36B	7623069
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH045XE36B	7623074
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH045XV36B	7623071
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH070XE36B	7623075
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	EL296UH070XV36B	7623072
13ACXN030-230	TXV	30,000	15.50	13.00	CH35-42B	SL280UH090V36B	7623083
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	SL280UH090V48B	7623497
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	SL280UH090XV48B	7623499
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42B	SLP98UH070XV36B	7623085
13ACXN030-230	TXV	29,600	13.00	11.50	CH35-42C		7623501
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42C	EL195UH090XE48C	7623088
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-42C	EL296UH090XE48C	7623090
13ACXN030-230	TXV	30,000	15.50	12.50	CH35-42C	EL296UH090XV36C	7623092
13ACXN030-230	TXV	30,000	15.50	12.50	CH35-42C	SLP98UH090XV36C	7623093
13ACXN030-230	TXV	29,600	13.00	11.50	CH35-48B		7623095
13ACXN030-230	TXV	29,800	13.00	11.50	CH35-48C		7623087
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-48C	EL296UH090XV36C	7623097
13ACXN030-230	TXV	30,000	15.10	12.50	CH35-48C	SLP98UH090XV36C	7623098
13ACXN030-230	TXV	27,400	13.00	10.50	CR33-24		7617454
13ACXN030-230	TXV	28,000	13.50	11.50	CR33-24	EL180DF045E36A	7620037
13ACXN030-230	TXV	28,200	13.50	11.50	CR33-24	EL180DF070E36B	7620078
13ACXN030-230	TXV	27,800	13.50	11.50	CR33-24	EL195DF045XE36B	7617413
13ACXN030-230	TXV	28,000	13.50	11.50	CR33-24	EL195DF070XE48B	7621853
13ACXN030-230	TXV	27,800	13.50	11.50	CR33-24	EL296DF045XE36B	7619148
13ACXN030-230	TXV	28,200	14.00	11.50	CR33-24	EL296DF045XV36B	7617417
13ACXN030-230	TXV	28,000	13.50	11.50	CR33-24	EL296DF070XE48B	7620852
13ACXN030-230	TXV	28,200	14.00	11.50	CR33-24	SL280DF070V36A	7617411
13ACXN030-230	TXV	27,600	13.00	11.00	CR33-24	SL280DF090V48B	7617457
13ACXN030-230	TXV	29,000	13.50	11.00	CR33-30/36		7617455
13ACXN030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL180DF045E36A	7620039
13ACXN030-230	TXV	29,600	15.00	12.50	CR33-30/36	EL180DF070E36B	7620080
13ACXN030-230	TXV	29,400	14.50	12.00	CR33-30/36	EL180DF090E48B	7620145
13ACXN030-230	TXV	29,400	14.50	12.00	CR33-30/36	EL195DF045XE36B	7617460
13ACXN030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL195DF070XE48B	7621854
13ACXN030-230	TXV	29,400	15.00	12.00	CR33-30/36	EL195DF090XE48C	7617463
13ACXN030-230	TXV	29,400	14.50	12.00	CR33-30/36	EL296DF045XE36B	7619156
13ACXN030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF045XV36B	7625411
13ACXN030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF070XE48B	7620853
13ACXN030-230	TXV	29,600	14.50	12.00	CR33-30/36	EL296DF070XV48B	7625405

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,400	15.00	12.00	CR33-30/36	EL296DF090XE48C	7619157
13ACXN030-230	TXV	29,600	14.50	12.00	CR33-30/36	SL280DF070V36A	7617459
13ACXN030-230	TXV	29,200	14.50	12.20	CR33-30/36	SL280DF090V48B	7617461
13ACXN030-230	TXV	29,400	14.50	12.00	CR33-30/36	SLP98DF070XV36B	7617462
13ACXN030-230	TXV	29,600	15.00	12.50	CR33-30/36	SLP98DF090XV36C	7617464
13ACXN030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL180UH045E36A	7620527
13ACXN030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL180UH045XE36A	7620338
13ACXN030-230	TXV	27,800	13.50	11.50	CX34-18/24	EL296UH090XV36C	7617783
13ACXN030-230	TXV	28,000	13.50	11.50	CX34-18/24A	SL280UH070V36A	7617465
13ACXN030-230	TXV	28,000	13.50	11.50	CX34-18/24A	SL280UH070XV36A	7617466
13ACXN030-230	TXV	28,200	13.50	11.50	CX34-18/24B	EL180UH070E36B	7620170
13ACXN030-230	TXV	28,200	13.50	11.50	CX34-18/24B	EL180UH070XE36B	7620359
13ACXN030-230	TXV	27,800	13.50	11.50	CX34-18/24B	EL180UH090E48B	7620370
13ACXN030-230	TXV	27,800	13.50	11.50	CX34-18/24B	EL180UH090XE48B	7619882
13ACXN030-230	TXV	27,800	13.50	11.50	CX34-18/24B	EL195UH045XE36B	7617472
13ACXN030-230	TXV	28,000	13.50	11.50	CX34-18/24B	EL195UH070XE36B	7617473
13ACXN030-230	TXV	27,800	13.50	11.50	CX34-18/24B	EL296UH045XE36B	7619158
13ACXN030-230	TXV	28,000	13.50	11.50	CX34-18/24B	EL296UH070XE36B	7619159
13ACXN030-230	TXV	27,800	13.50	11.00	CX34-18/24B	EL296UH070XV36B	7617474
13ACXN030-230	TXV	28,200	13.50	11.50	CX34-18/24B	SL280UH090V36B	7617467
13ACXN030-230	TXV	28,400	13.00	11.00	CX34-18/24B	SL280UH090V48B	7617468
13ACXN030-230	TXV	28,400	13.00	11.00	CX34-18/24B	SL280UH090XV48B	7617469
13ACXN030-230	TXV	28,000	13.50	11.50	CX34-18/24B	SLP98UH070XV36B	7617470
13ACXN030-230	TXV	28,000	13.50	11.50	CX34-18/24C	SLP98UH090XV36C	7617471
13ACXN030-230	TXV	28,400	13.00	11.00	CX34-19		7617414
13ACXN030-230	TXV	28,800	14.00	12.00	CX34-19	EL180UH045E36A	7620528
13ACXN030-230	TXV	28,800	14.00	12.00	CX34-19	EL180UH045XE36A	7620339
13ACXN030-230	TXV	28,800	14.50	12.00	CX34-19	SL280UH070V36A	7617475
13ACXN030-230	TXV	28,800	14.50	12.00	CX34-19	SL280UH070XV36A	7617476
13ACXN030-230	TXV	28,800	13.50	11.00	CX34-25		7617415
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-25	EL180UH045E36A	7620529
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-25	EL180UH045XE36A	7620340
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-25	SL280UH070V36A	7617477
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-25	SL280UH070XV36A	7617478
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-25B	EL195UH045XE36B	7617479
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-25B	EL195UH070XE36B	7617480
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-25B	EL296UH045XE36B	7619160
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-25B	EL296UH045XV36B	7617481
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-25B	EL296UH070XE36B	7619161
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-25B	EL296UH070XV36B	7617482
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-25B	SL280UH090V36B	7617483
13ACXN030-230	TXV	29,600	14.50	12.00	CX34-25B	SL280UH090V48B	7617484
13ACXN030-230	TXV	29,600	14.50	12.00	CX34-25B	SL280UH090XV48B	7617485
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-25B	SLP98UH070XV36B	7617486
13ACXN030-230	TXV	28,200	13.00	11.00	CX34-30		7617416
13ACXN030-230	TXV	28,400	14.00	11.50	CX34-30	EL180UH045E36A	7620530
13ACXN030-230	TXV	28,400	14.00	11.50	CX34-30	EL180UH045XE36A	7620341
13ACXN030-230	TXV	28,800	14.00	12.00	CX34-30	EL296UH090XE48C	7619164
13ACXN030-230	TXV	28,600	14.00	12.00	CX34-30	SLP98UH090XV36C	7617495

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	28,800	14.00	12.00	CX34-30A	SL280UH070V36A	7617489
13ACXN030-230	TXV	28,800	14.00	12.00	CX34-30A	SL280UH070XV36A	7617490
13ACXN030-230	TXV	28,400	14.00	12.00	CX34-30B	EL180UH070E36B	7620204
13ACXN030-230	TXV	28,400	14.00	12.00	CX34-30B	EL180UH070XE36B	7620360
13ACXN030-230	TXV	28,400	14.00	12.00	CX34-30B	EL180UH090E48B	7620371
13ACXN030-230	TXV	28,400	14.00	12.00	CX34-30B	EL180UH090XE48B	7619901
13ACXN030-230	TXV	28,400	13.50	11.50	CX34-30B	EL195UH045XE36B	7617496
13ACXN030-230	TXV	28,600	13.50	11.50	CX34-30B	EL195UH070XE36B	7617497
13ACXN030-230	TXV	28,400	13.50	11.50	CX34-30B	EL296UH045XE36B	7619162
13ACXN030-230	TXV	28,600	14.00	11.50	CX34-30B	EL296UH045XV36B	7617487
13ACXN030-230	TXV	28,600	13.50	11.50	CX34-30B	EL296UH070XE36B	7619163
13ACXN030-230	TXV	28,600	14.00	12.00	CX34-30B	EL296UH070XV36B	7617488
13ACXN030-230	TXV	28,800	14.00	12.00	CX34-30B	SL280UH090V36B	7617491
13ACXN030-230	TXV	29,000	14.00	11.70	CX34-30B	SL280UH090V48B	7617492
13ACXN030-230	TXV	29,000	14.00	11.70	CX34-30B	SL280UH090XV48B	7617493
13ACXN030-230	TXV	28,600	14.00	11.50	CX34-30B	SLP98UH070XV36B	7617494
13ACXN030-230	TXV	28,800	14.00	12.00	CX34-30C	EL195UH090XE48C	7617498
13ACXN030-230	TXV	28,600	14.00	12.00	CX34-30C	EL296UH090XV36C	7617499
13ACXN030-230	TXV	29,200	13.50	11.00	CX34-31		7617502
13ACXN030-230	TXV	29,800	14.50	12.00	CX34-31	EL180UH045E36A	7621846
13ACXN030-230	TXV	29,800	14.50	12.00	CX34-31	EL180UH045XE36A	7621848
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31A	SL280UH070V36A	7617500
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31A	SL280UH070XV36A	7617501
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31B	EL180UH070E36B	7620206
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31B	EL180UH070XE36B	7620361
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31B	EL180UH090E48B	7620372
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31B	EL180UH090XE48B	7619903
13ACXN030-230	TXV	29,800	14.50	12.00	CX34-31B	EL195UH045XE36B	7617503
13ACXN030-230	TXV	30,000	14.50	12.00	CX34-31B	EL195UH070XE36B	7617507
13ACXN030-230	TXV	29,800	14.50	12.00	CX34-31B	EL296UH045XE36B	7619165
13ACXN030-230	TXV	29,600	14.50	12.00	CX34-31B	EL296UH045XV36B	7617508
13ACXN030-230	TXV	30,000	14.50	12.00	CX34-31B	EL296UH070XE36B	7619166
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31B	EL296UH070XV36B	7617509
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-31B	SL280UH090V36B	7617510
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-31B	SL280UH090V48B	7617511
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-31B	SL280UH090XV48B	7617512
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-31B	SLP98UH070XV36B	7617513
13ACXN030-230	TXV	28,600	13.00	11.00	CX34-36		7617504
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-36	EL180UH045E36A	7620531
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-36	EL180UH045XE36A	7620342
13ACXN030-230	TXV	29,000	14.50	12.00	CX34-36	EL296UH090XE48C	7619169
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-36A	SL280UH070V36A	7617514
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-36A	SL280UH070XV36A	7617515
13ACXN030-230	TXV	29,200	15.00	12.50	CX34-36B	EL180UH070E36B	7620208
13ACXN030-230	TXV	29,200	15.00	12.50	CX34-36B	EL180UH070XE36B	7620373
13ACXN030-230	TXV	29,400	15.00	12.50	CX34-36B	EL180UH090E48B	7620398
13ACXN030-230	TXV	29,400	15.00	12.50	CX34-36B	EL180UH090XE48B	7619905
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-36B	EL195UH045XE36B	7617516
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-36B	EL195UH070XE36B	7617517

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-36B	EL296UH045XE36B	7619167
13ACXN030-230	TXV	29,000	14.50	12.00	CX34-36B	EL296UH045XV36B	7617518
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-36B	EL296UH070XE36B	7619168
13ACXN030-230	TXV	29,000	14.50	12.00	CX34-36B	EL296UH070XV36B	7617519
13ACXN030-230	TXV	29,400	15.00	12.50	CX34-36B	SL280UH090V36B	7617520
13ACXN030-230	TXV	29,600	14.50	12.20	CX34-36B	SL280UH090V48B	7617521
13ACXN030-230	TXV	29,600	14.50	12.20	CX34-36B	SL280UH090XV48B	7617522
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-36B	SLP98UH070XV36B	7617523
13ACXN030-230	TXV	29,000	14.50	12.00	CX34-36C	EL195UH090XE48C	7617525
13ACXN030-230	TXV	29,200	15.00	12.50	CX34-36C	EL296UH090XV36C	7617526
13ACXN030-230	TXV	29,200	15.00	12.50	CX34-36C	SLP98UH090XV36C	7617524
13ACXN030-230	TXV	29,400	13.50	11.50	CX34-38		7617505
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-38	EL180UH045E36A	7620532
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-38	EL180UH045XE36A	7620343
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-38A	SL280UH070V36A	7617527
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-38A	SL280UH070XV36A	7617528
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-38B	EL180UH070E36B	7620209
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-38B	EL180UH070XE36B	7620374
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-38B	EL180UH090E48B	7620399
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-38B	EL180UH090XE48B	7619907
13ACXN030-230	TXV	30,000	15.00	12.00	CX34-38B	EL195UH045XE36B	7617529
13ACXN030-230	TXV	30,200	15.00	12.00	CX34-38B	EL195UH070XE36B	7617530
13ACXN030-230	TXV	30,000	15.00	12.00	CX34-38B	EL296UH045XE36B	7619170
13ACXN030-230	TXV	29,800	15.00	12.00	CX34-38B	EL296UH045XV36B	7617531
13ACXN030-230	TXV	30,200	15.00	12.00	CX34-38B	EL296UH070XE36B	7619171
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-38B	EL296UH070XV36B	7617532
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-38B	SL280UH090V36B	7617533
13ACXN030-230	TXV	30,200	15.00	12.50	CX34-38B	SL280UH090V48B	7617534
13ACXN030-230	TXV	30,200	15.00	12.50	CX34-38B	SL280UH090XV48B	7617535
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-38B	SLP98UH070XV36B	7617536
13ACXN030-230	TXV	28,600	13.00	11.00	CX34-42		7617506
13ACXN030-230	TXV	29,200	15.00	12.50	CX34-42	EL180UH070E36B	7620210
13ACXN030-230	TXV	29,200	15.00	12.50	CX34-42	EL180UH070XE36B	7620375
13ACXN030-230	TXV	29,400	15.00	12.50	CX34-42	EL180UH090E48B	7620400
13ACXN030-230	TXV	29,400	15.00	12.50	CX34-42	EL180UH090XE48B	7619909
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-42	EL195UH045XE36B	7617537
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-42	EL195UH070XE36B	7617538
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-42	EL296UH045XE36B	7619172
13ACXN030-230	TXV	29,000	14.50	12.00	CX34-42	EL296UH045XV36B	7617539
13ACXN030-230	TXV	29,400	14.50	12.00	CX34-42	EL296UH070XE36B	7619173
13ACXN030-230	TXV	29,000	14.50	12.00	CX34-42	EL296UH070XV36B	7617540
13ACXN030-230	TXV	29,400	15.00	12.50	CX34-42	SL280UH090V36B	7617541
13ACXN030-230	TXV	29,600	14.50	12.20	CX34-42	SL280UH090V48B	7617542
13ACXN030-230	TXV	29,600	14.50	12.20	CX34-42	SL280UH090XV48B	7617543
13ACXN030-230	TXV	29,200	14.50	12.00	CX34-42	SLP98UH070XV36B	7617544
13ACXN030-230	TXV	29,600	13.50	11.50	CX34-43		7617553
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-43	EL296UH090XE48C	7619176
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-43B	EL180UH070E36B	7620211
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-43B	EL180UH070XE36B	7620376

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	30,400	15.50	12.50	CX34-43B	EL180UH090E48B	7620401
13ACXN030-230	TXV	30,400	15.50	12.50	CX34-43B	EL180UH090XE48B	7619911
13ACXN030-230	TXV	30,200	15.00	12.50	CX34-43B	EL195UH045XE36B	7617545
13ACXN030-230	TXV	30,400	15.00	12.50	CX34-43B	EL195UH070XE36B	7617546
13ACXN030-230	TXV	30,200	15.00	12.50	CX34-43B	EL296UH045XE36B	7619174
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-43B	EL296UH045XV36B	7617547
13ACXN030-230	TXV	30,400	15.00	12.50	CX34-43B	EL296UH070XE36B	7619175
13ACXN030-230	TXV	30,000	15.00	12.50	CX34-43B	EL296UH070XV36B	7617548
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-43B	SL280UH090V36B	7617549
13ACXN030-230	TXV	30,400	15.00	12.50	CX34-43B	SL280UH090V48B	7617550
13ACXN030-230	TXV	30,400	15.00	12.50	CX34-43B	SL280UH090XV48B	7617551
13ACXN030-230	TXV	30,200	15.00	12.50	CX34-43B	SLP98UH070XV36B	7617552
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-43C	EL195UH090XE48C	7617554
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-43C	EL296UH090XV36C	7617556
13ACXN030-230	TXV	30,200	15.50	12.50	CX34-43C	SLP98UH090XV36C	7617555
13ACXN030-230	TXV	29,200	13.50	11.00	CX34-44/48		7617557
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-44/48	EL296UH090XE48C	7619177
13ACXN030-230	TXV	29,800	15.00	12.50	CX34-44/48C	EL195UH090XE48C	7617558
13ACXN030-230	TXV	29,600	15.00	12.50	CX34-44/48C	EL296UH090XV36C	7617560
13ACXN030-230	TXV	29,600	15.00	12.50	CX34-44/48C	SLP98UH090XV36C	7617559
13ACXN030-230	TXV	27,800	13.50	11.50	CX35-18/24A	EL180UH045E36A	8266544
13ACXN030-230	TXV	27,800	13.50	11.50	CX35-18/24A	EL180UH045XE36A	8266548
13ACXN030-230	TXV	27,800	13.50	11.50	CX35-18/24A	EL296UH090XV36C	8266550
13ACXN030-230	TXV	28,000	13.50	11.50	CX35-18/24A	SL280UH070V36A	8266554
13ACXN030-230	TXV	28,000	13.50	11.50	CX35-18/24A	SL280UH070XV36A	8266555
13ACXN030-230	TXV	28,200	13.50	11.50	CX35-18/24B	EL180UH070E36B	8266559
13ACXN030-230	TXV	28,200	13.50	11.50	CX35-18/24B	EL180UH070XE36B	8266560
13ACXN030-230	TXV	27,800	13.50	11.50	CX35-18/24B	EL180UH090E48B	8266561
13ACXN030-230	TXV	27,800	13.50	11.50	CX35-18/24B	EL180UH090XE48B	8266558
13ACXN030-230	TXV	27,800	13.50	11.50	CX35-18/24B	EL195UH045XE36B	8266576
13ACXN030-230	TXV	28,000	13.50	11.50	CX35-18/24B	EL195UH070XE36B	8266577
13ACXN030-230	TXV	27,800	13.50	11.50	CX35-18/24B	EL296UH045XE36B	8266562
13ACXN030-230	TXV	28,000	13.50	11.50	CX35-18/24B	EL296UH070XE36B	8266563
13ACXN030-230	TXV	27,800	13.50	11.00	CX35-18/24B	EL296UH070XV36B	8266578
13ACXN030-230	TXV	28,200	13.50	11.50	CX35-18/24B	SL280UH090V36B	8266572
13ACXN030-230	TXV	28,400	13.00	11.00	CX35-18/24B	SL280UH090V48B	8266573
13ACXN030-230	TXV	28,400	13.00	11.00	CX35-18/24B	SL280UH090XV48B	8266574
13ACXN030-230	TXV	28,000	13.50	11.50	CX35-18/24B	SLP98UH070XV36B	8266575
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-24A	EL180UH045E36A	8266583
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-24A	EL180UH045XE36A	8266587
13ACXN030-230	TXV	29,400	14.50	12.00	CX35-24A	SL280UH070V36A	8266590
13ACXN030-230	TXV	29,400	14.50	12.00	CX35-24A	SL280UH070XV36A	8266591
13ACXN030-230	TXV	28,800	13.50	11.00	CX35-24B		8266580
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-24B	EL195UH045XE36B	8266609
13ACXN030-230	TXV	29,400	14.50	12.00	CX35-24B	EL195UH070XE36B	8266610
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-24B	EL296UH045XE36B	8266594
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-24B	EL296UH045XV36B	8266611
13ACXN030-230	TXV	29,400	14.50	12.00	CX35-24B	EL296UH070XE36B	8266595
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-24B	EL296UH070XV36B	8266604

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	29,400	14.50	12.00	CX35-24B	SL280UH090V36B	8266605
13ACXN030-230	TXV	29,600	14.50	12.00	CX35-24B	SL280UH090V48B	8266606
13ACXN030-230	TXV	29,600	14.50	12.00	CX35-24B	SL280UH090XV48B	8266607
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-24B	SLP98UH070XV36B	8266608
13ACXN030-230	TXV	28,600	13.00	11.00	CX35-30/36A		8266662
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-30/36A	EL180UH045E36A	8266663
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-30/36A	EL180UH045XE36A	8266666
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-30/36A	SL280UH070V36A	8266672
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-30/36A	SL280UH070XV36A	8266673
13ACXN030-230	TXV	29,200	15.00	12.50	CX35-30/36B	EL180UH070E36B	8266677
13ACXN030-230	TXV	29,200	15.00	12.50	CX35-30/36B	EL180UH070XE36B	8266679
13ACXN030-230	TXV	29,400	15.00	12.50	CX35-30/36B	EL180UH090E48B	8266674
13ACXN030-230	TXV	29,400	15.00	12.50	CX35-30/36B	EL180UH090XE48B	8266676
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-30/36B	EL195UH045XE36B	8266690
13ACXN030-230	TXV	29,400	14.50	12.00	CX35-30/36B	EL195UH070XE36B	8266691
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-30/36B	EL296UH045XE36B	8266682
13ACXN030-230	TXV	29,000	14.50	12.00	CX35-30/36B	EL296UH045XV36B	8266692
13ACXN030-230	TXV	29,400	14.50	12.00	CX35-30/36B	EL296UH070XE36B	8266683
13ACXN030-230	TXV	29,000	14.50	12.00	CX35-30/36B	EL296UH070XV36B	8266693
13ACXN030-230	TXV	29,400	15.00	12.50	CX35-30/36B	SL280UH090V36B	8266694
13ACXN030-230	TXV	29,600	14.50	12.20	CX35-30/36B	SL280UH090V48B	8266695
13ACXN030-230	TXV	29,600	14.50	12.20	CX35-30/36B	SL280UH090XV48B	8266696
13ACXN030-230	TXV	29,200	14.50	12.00	CX35-30/36B	SLP98UH070XV36B	8266697
13ACXN030-230	TXV	29,000	14.50	12.00	CX35-30/36C	EL195UH090XE48C	8266699
13ACXN030-230	TXV	29,000	14.50	12.00	CX35-30/36C	EL296UH090XE48C	8266667
13ACXN030-230	TXV	29,200	15.00	12.50	CX35-30/36C	EL296UH090XV36C	8266700
13ACXN030-230	TXV	29,200	15.00	12.50	CX35-30/36C	SLP98UH090XV36C	8266698
13ACXN030-230	TXV	29,200	13.50	11.00	CX35-30A		8266614
13ACXN030-230	TXV	29,800	14.50	12.00	CX35-30A	EL180UH045E36A	8266616
13ACXN030-230	TXV	29,800	14.50	12.00	CX35-30A	EL180UH045XE36A	8266617
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30A	SL280UH070V36A	8266625
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30A	SL280UH070XV36A	8266626
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30B	EL180UH070E36B	8266633
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30B	EL180UH070XE36B	8266635
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30B	EL180UH090E48B	8266636
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30B	EL180UH090XE48B	8266631
13ACXN030-230	TXV	29,800	14.50	12.00	CX35-30B	EL195UH045XE36B	8266653
13ACXN030-230	TXV	30,000	14.50	12.00	CX35-30B	EL195UH070XE36B	8266654
13ACXN030-230	TXV	29,800	14.50	12.00	CX35-30B	EL296UH045XE36B	8266645
13ACXN030-230	TXV	29,600	14.50	12.00	CX35-30B	EL296UH045XV36B	8266655
13ACXN030-230	TXV	30,000	14.50	12.00	CX35-30B	EL296UH070XE36B	8266646
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30B	EL296UH070XV36B	8266656
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-30B	SL280UH090V36B	8266657
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-30B	SL280UH090V48B	8266658
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-30B	SL280UH090XV48B	8266659
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-30B	SLP98UH070XV36B	8266660
13ACXN030-230	TXV	29,400	13.50	11.50	CX35-36A		8266702
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-36A	EL180UH045E36A	8266703
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-36A	EL180UH045XE36A	8266706

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-36A	SL280UH070V36A	8266711
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-36A	SL280UH070XV36A	8266712
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-36B	EL180UH070E36B	8266720
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-36B	EL180UH070XE36B	8266722
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-36B	EL180UH090E48B	8266713
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-36B	EL180UH090XE48B	8266718
13ACXN030-230	TXV	30,000	15.00	12.00	CX35-36B	EL195UH045XE36B	8266741
13ACXN030-230	TXV	30,200	15.00	12.00	CX35-36B	EL195UH070XE36B	8266742
13ACXN030-230	TXV	30,000	15.00	12.00	CX35-36B	EL296UH045XE36B	8266732
13ACXN030-230	TXV	29,800	15.00	12.00	CX35-36B	EL296UH045XV36B	8266743
13ACXN030-230	TXV	30,200	15.00	12.00	CX35-36B	EL296UH070XE36B	8266733
13ACXN030-230	TXV	29,800	15.00	12.50	CX35-36B	EL296UH070XV36B	8266744
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-36B	SL280UH090V36B	8266745
13ACXN030-230	TXV	30,200	15.00	12.50	CX35-36B	SL280UH090V48B	8266746
13ACXN030-230	TXV	30,200	15.00	12.50	CX35-36B	SL280UH090XV48B	8266747
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-36B	SLP98UH070XV36B	8266748
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-48B	EL180UH070E36B	8266757
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-48B	EL180UH070XE36B	8266759
13ACXN030-230	TXV	30,400	15.50	12.50	CX35-48B	EL180UH090E48B	8266754
13ACXN030-230	TXV	30,400	15.50	12.50	CX35-48B	EL180UH090XE48B	8266755
13ACXN030-230	TXV	30,200	15.00	12.50	CX35-48B	EL195UH045XE36B	8266767
13ACXN030-230	TXV	30,400	15.00	12.50	CX35-48B	EL195UH070XE36B	8266768
13ACXN030-230	TXV	30,200	15.00	12.50	CX35-48B	EL296UH045XE36B	8266765
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-48B	EL296UH045XV36B	8266769
13ACXN030-230	TXV	30,400	15.00	12.50	CX35-48B	EL296UH070XE36B	8266766
13ACXN030-230	TXV	30,000	15.00	12.50	CX35-48B	EL296UH070XV36B	8266770
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-48B	SL280UH090V36B	8266771
13ACXN030-230	TXV	30,400	15.00	12.50	CX35-48B	SL280UH090V48B	8266772
13ACXN030-230	TXV	30,400	15.00	12.50	CX35-48B	SL280UH090XV48B	8266773
13ACXN030-230	TXV	30,200	15.00	12.50	CX35-48B	SLP98UH070XV36B	8266774
13ACXN030-230	TXV	29,600	13.50	11.50	CX35-48C		8266779
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-48C	EL195UH090XE48C	8266815
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-48C	EL296UH090XE48C	8266801
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-48C	EL296UH090XV36C	8266817
13ACXN030-230	TXV	30,200	15.50	12.50	CX35-48C	SLP98UH090XV36C	8266816
13ACXN036-230	RFC	35,000	13.00	10.70	C33-38		7619361
13ACXN036-230	RFC	35,400	13.00	11.00	C33-43		7619368
13ACXN036-230	RFC	35,200	13.00	11.00	C33-50/60C		7619405
13ACXN036-230	RFC	35,800	13.00	11.00	CH33-43		7619429
13ACXN036-230	RFC	35,000	13.00	10.50	CH33-44/48B		7619448
13ACXN036-230	RFC	35,000	13.00	10.50	CR33-50/60		7619460
13ACXN036-230	TXV	35,200	13.00	11.00	C33-31A	EL180UH045E36A	7620279
13ACXN036-230	TXV	35,200	13.00	11.00	C33-31A	EL180UH045XE36A	7619956
13ACXN036-230	TXV	35,000	13.00	11.00	C33-31A	SL280UH070V36A	7619371
13ACXN036-230	TXV	35,000	13.00	11.00	C33-31A	SL280UH070XV36A	7619372
13ACXN036-230	TXV	35,000	14.00	11.00	C33-31B	EL180UH070E36B	7620688
13ACXN036-230	TXV	35,000	14.00	11.00	C33-31B	EL180UH070XE36B	7620490
13ACXN036-230	TXV	35,200	14.00	11.00	C33-31B	EL180UH090E48B	7620607
13ACXN036-230	TXV	35,200	14.00	11.00	C33-31B	EL180UH090XE48B	7620074

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	35,000	13.00	11.00	C33-31B	EL195UH045XE36B	7619373
13ACXN036-230	TXV	34,800	13.00	11.00	C33-31B	EL195UH070XE36B	7619374
13ACXN036-230	TXV	34,800	13.00	11.00	C33-31B	EL296UH045XV36B	7619375
13ACXN036-230	TXV	35,000	13.00	11.00	C33-31B	EL296UH070XV36B	7619354
13ACXN036-230	TXV	35,200	14.00	11.00	C33-31B	SL280UH090V36B	7619355
13ACXN036-230	TXV	35,200	14.00	11.00	C33-31B	SL280UH090V48B	7619356
13ACXN036-230	TXV	35,200	14.00	11.00	C33-31B	SL280UH090XV48B	7619357
13ACXN036-230	TXV	35,000	13.00	11.00	C33-31B	SLP98UH070XV36B	7619755
13ACXN036-230	TXV	35,000	13.00	10.70	C33-38		7619523
13ACXN036-230	TXV	35,600	14.00	11.00	C33-38A	EL180UH045E36A	7620281
13ACXN036-230	TXV	35,600	14.00	11.00	C33-38A	EL180UH045XE36A	7619960
13ACXN036-230	TXV	35,200	14.00	11.00	C33-38A	SL280UH070V36A	7619359
13ACXN036-230	TXV	35,200	14.00	11.00	C33-38A	SL280UH070XV36A	7619360
13ACXN036-230	TXV	35,600	14.50	12.00	C33-38B	EL180UH070E36B	7620690
13ACXN036-230	TXV	35,600	14.50	12.00	C33-38B	EL180UH070XE36B	7620491
13ACXN036-230	TXV	35,800	14.00	11.00	C33-38B	EL180UH090E48B	7620608
13ACXN036-230	TXV	35,800	14.00	11.00	C33-38B	EL180UH090XE48B	7620076
13ACXN036-230	TXV	35,400	14.00	11.00	C33-38B	EL195UH070XE36B	7619362
13ACXN036-230	TXV	35,200	14.00	11.00	C33-38B	EL296UH045XV36B	7619363
13ACXN036-230	TXV	35,400	14.00	11.00	C33-38B	EL296UH070XV36B	7619364
13ACXN036-230	TXV	35,600	14.00	11.00	C33-38B	SL280UH090V36B	7619365
13ACXN036-230	TXV	35,600	14.00	11.00	C33-38B	SL280UH090V48B	7619366
13ACXN036-230	TXV	35,600	14.00	11.00	C33-38B	SL280UH090XV48B	7619367
13ACXN036-230	TXV	35,000	13.00	11.00	C33-38B	SLP98UH070XV36B	7619358
13ACXN036-230	TXV	35,400	13.00	11.00	C33-43		7619524
13ACXN036-230	TXV	36,000	14.50	12.00	C33-43	EL180UH090E60C	7620795
13ACXN036-230	TXV	35,800	14.50	12.00	C33-43	EL180UH110E60C	7620448
13ACXN036-230	TXV	35,800	14.50	12.00	C33-43	EL180UH110XE60C	7620682
13ACXN036-230	TXV	35,800	14.00	11.00	C33-43	EL195UH090XE48C	7619380
13ACXN036-230	TXV	36,000	14.00	11.00	C33-43	EL195UH110XE60C	7619381
13ACXN036-230	TXV	35,800	14.00	11.00	C33-43	EL296UH090XE48C	7619529
13ACXN036-230	TXV	35,800	14.00	11.00	C33-43	EL296UH090XV36C	7619382
13ACXN036-230	TXV	35,800	14.00	11.00	C33-43	EL296UH090XV48C	7619383
13ACXN036-230	TXV	36,000	14.00	11.00	C33-43	EL296UH110XE60C	7619530
13ACXN036-230	TXV	36,400	14.25	11.70	C33-43	SL280UH090V60C	7619384
13ACXN036-230	TXV	36,400	14.50	12.00	C33-43	SL280UH090XV60C	7619386
13ACXN036-230	TXV	36,200	14.00	11.00	C33-43	SL280UH110V60C	7619385
13ACXN036-230	TXV	36,200	14.00	11.00	C33-43	SL280UH110XV60C	7619387
13ACXN036-230	TXV	35,800	14.00	11.00	C33-43	SLP98UH090XV36C	7619388
13ACXN036-230	TXV	35,800	14.00	11.00	C33-43	SLP98UH090XV48C	7619389
13ACXN036-230	TXV	36,200	14.50	12.00	C33-43	SLP98UH110XV60C	7619390
13ACXN036-230	TXV	35,800	14.50	12.00	C33-43B	EL180UH070E36B	7620707
13ACXN036-230	TXV	35,800	14.50	12.00	C33-43B	EL180UH070XE36B	7620492
13ACXN036-230	TXV	36,000	14.00	11.00	C33-43B	EL180UH090E48B	7620625
13ACXN036-230	TXV	36,000	14.00	11.00	C33-43B	EL180UH090XE48B	7620143
13ACXN036-230	TXV	35,600	14.00	11.00	C33-43B	EL195UH070XE36B	7619369
13ACXN036-230	TXV	35,600	14.00	11.00	C33-43B	EL296UH070XE36B	7619528
13ACXN036-230	TXV	35,600	14.00	11.00	C33-43B	EL296UH070XV36B	7619370
13ACXN036-230	TXV	35,800	14.50	12.00	C33-43B	SL280UH090V36B	7619376

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	36,000	14.50	12.00	C33-43B	SL280UH090V48B	7619377
13ACXN036-230	TXV	36,000	14.50	12.00	C33-43B	SL280UH090XV48B	7619378
13ACXN036-230	TXV	35,600	14.00	11.00	C33-43B	SLP98UH070XV36B	7619379
13ACXN036-230	TXV	34,800	13.00	10.50	C33-48		7621821
13ACXN036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH070E36B	7620709
13ACXN036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH070XE36B	7620493
13ACXN036-230	TXV	35,600	14.00	11.00	C33-48B	EL180UH090E48B	7620627
13ACXN036-230	TXV	35,600	14.00	11.00	C33-48B	EL180UH090E60C	7620798
13ACXN036-230	TXV	35,600	14.00	11.00	C33-48B	EL180UH090XE48B	7620194
13ACXN036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH110E60C	7620449
13ACXN036-230	TXV	35,200	14.00	11.00	C33-48B	EL180UH110XE60C	7620685
13ACXN036-230	TXV	35,400	14.00	11.00	C33-48B	EL195UH090XE48C	7619394
13ACXN036-230	TXV	35,600	14.00	11.00	C33-48B	EL195UH110XE60C	7619395
13ACXN036-230	TXV	35,400	14.00	11.00	C33-48B	EL296UH090XV36C	7619396
13ACXN036-230	TXV	35,200	14.00	11.00	C33-48B	EL296UH090XV48C	7619397
13ACXN036-230	TXV	35,200	14.00	11.00	C33-48B	SL280UH090V36B	7619391
13ACXN036-230	TXV	35,400	14.00	11.00	C33-48B	SL280UH090V48B	7619392
13ACXN036-230	TXV	35,800	14.00	11.00	C33-48B	SL280UH090V60C	7619398
13ACXN036-230	TXV	35,400	14.00	11.00	C33-48B	SL280UH090XV48B	7619393
13ACXN036-230	TXV	35,800	14.00	11.00	C33-48B	SL280UH090XV60C	7619400
13ACXN036-230	TXV	35,600	13.00	11.00	C33-48B	SL280UH110V60C	7619399
13ACXN036-230	TXV	35,600	13.00	11.00	C33-48B	SL280UH110XV60C	7619401
13ACXN036-230	TXV	35,400	14.00	11.00	C33-48B	SLP98UH090XV36C	7619402
13ACXN036-230	TXV	35,200	14.00	11.00	C33-48B	SLP98UH090XV48C	7619403
13ACXN036-230	TXV	35,600	14.00	11.00	C33-48B	SLP98UH110XV60C	7619404
13ACXN036-230	TXV	35,200	13.00	11.00	C33-50/60C		7619525
13ACXN036-230	TXV	36,000	14.50	12.00	C33-50/60C	EL180UH090E60C	7620800
13ACXN036-230	TXV	35,600	14.00	11.00	C33-50/60C	EL180UH110E60C	7620450
13ACXN036-230	TXV	35,600	14.00	11.00	C33-50/60C	EL180UH110XE60C	7620686
13ACXN036-230	TXV	35,800	14.00	11.00	C33-50/60C	EL195UH090XE48C	7619406
13ACXN036-230	TXV	36,000	14.00	11.00	C33-50/60C	EL195UH110XE60C	7619407
13ACXN036-230	TXV	35,800	14.00	11.00	C33-50/60C	EL296UH090XE48C	7619531
13ACXN036-230	TXV	35,800	14.00	11.00	C33-50/60C	EL296UH090XV36C	7619408
13ACXN036-230	TXV	35,600	14.00	11.00	C33-50/60C	EL296UH090XV48C	7619409
13ACXN036-230	TXV	36,000	14.00	11.00	C33-50/60C	EL296UH110XE60C	7619532
13ACXN036-230	TXV	36,200	14.25	11.70	C33-50/60C	SL280UH090V60C	7619410
13ACXN036-230	TXV	36,200	14.25	11.70	C33-50/60C	SL280UH090XV60C	7619412
13ACXN036-230	TXV	36,000	14.00	11.00	C33-50/60C	SL280UH110V60C	7619411
13ACXN036-230	TXV	36,000	14.00	11.00	C33-50/60C	SL280UH110XV60C	7619413
13ACXN036-230	TXV	35,800	14.00	11.00	C33-50/60C	SLP98UH090XV36C	7619414
13ACXN036-230	TXV	35,600	14.00	11.00	C33-50/60C	SLP98UH090XV48C	7619415
13ACXN036-230	TXV	36,000	14.00	11.00	C33-50/60C	SLP98UH110XV60C	7619416
13ACXN036-230	TXV	35,200	13.00	11.00	C35-30A	EL180UH045E36A	8266962
13ACXN036-230	TXV	35,200	13.00	11.00	C35-30A	EL180UH045XE36A	8266961
13ACXN036-230	TXV	35,000	13.00	11.00	C35-30A	SL280UH070V36A	8266964
13ACXN036-230	TXV	35,000	13.00	11.00	C35-30A	SL280UH070XV36A	8266965
13ACXN036-230	TXV	35,000	14.00	11.00	C35-30B	EL180UH070E36B	8266972
13ACXN036-230	TXV	35,000	14.00	11.00	C35-30B	EL180UH070XE36B	8266970
13ACXN036-230	TXV	35,200	14.00	11.00	C35-30B	EL180UH090E48B	8266971

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	35,200	14.00	11.00	C35-30B	EL180UH090XE48B	8266974
13ACXN036-230	TXV	35,000	13.00	11.00	C35-30B	EL195UH045XE36B	8266980
13ACXN036-230	TXV	34,800	13.00	11.00	C35-30B	EL195UH070XE36B	8266981
13ACXN036-230	TXV	34,800	13.00	11.00	C35-30B	EL296UH045XV36B	8266982
13ACXN036-230	TXV	35,000	13.00	11.00	C35-30B	EL296UH070XV36B	8266988
13ACXN036-230	TXV	35,200	14.00	11.00	C35-30B	SL280UH090V36B	8266989
13ACXN036-230	TXV	35,200	14.00	11.00	C35-30B	SL280UH090V48B	8266990
13ACXN036-230	TXV	35,200	14.00	11.00	C35-30B	SL280UH090XV48B	8266991
13ACXN036-230	TXV	35,000	13.00	11.00	C35-30B	SLP98UH070XV36B	8266983
13ACXN036-230	TXV	35,000	13.00	10.70	C35-36A		8267045
13ACXN036-230	TXV	35,600	14.00	11.00	C35-36A	EL180UH045E36A	8267050
13ACXN036-230	TXV	35,600	14.00	11.00	C35-36A	EL180UH045XE36A	8267048
13ACXN036-230	TXV	35,200	14.00	11.00	C35-36A	SL280UH070V36A	8267053
13ACXN036-230	TXV	35,200	14.00	11.00	C35-36A	SL280UH070XV36A	8267054
13ACXN036-230	TXV	35,000	13.00	10.50	C35-36B		8269490
13ACXN036-230	TXV	35,600	14.50	12.00	C35-36B	EL180UH070E36B	8267063
13ACXN036-230	TXV	35,600	14.50	12.00	C35-36B	EL180UH070XE36B	8267060
13ACXN036-230	TXV	35,800	14.00	11.00	C35-36B	EL180UH090E48B	8267062
13ACXN036-230	TXV	35,800	14.00	11.00	C35-36B	EL180UH090XE48B	8267066
13ACXN036-230	TXV	35,400	14.00	11.00	C35-36B	EL195UH070XE36B	8267072
13ACXN036-230	TXV	35,200	14.00	11.00	C35-36B	EL296UH045XV36B	8267073
13ACXN036-230	TXV	35,400	14.00	11.00	C35-36B	EL296UH070XV36B	8267074
13ACXN036-230	TXV	35,600	14.00	11.00	C35-36B	SL280UH090V36B	8267075
13ACXN036-230	TXV	35,600	14.00	11.00	C35-36B	SL280UH090V48B	8267076
13ACXN036-230	TXV	35,600	14.00	11.00	C35-36B	SL280UH090XV48B	8267077
13ACXN036-230	TXV	35,000	13.00	11.00	C35-36B	SLP98UH070XV36B	8267083
13ACXN036-230	TXV	35,400	13.00	11.00	C35-48B		8267100
13ACXN036-230	TXV	35,800	14.50	12.00	C35-48B	EL180UH070E36B	8267142
13ACXN036-230	TXV	35,800	14.50	12.00	C35-48B	EL180UH070XE36B	8267140
13ACXN036-230	TXV	36,000	14.00	11.00	C35-48B	EL180UH090E48B	8267141
13ACXN036-230	TXV	36,000	14.00	11.00	C35-48B	EL180UH090XE48B	8267146
13ACXN036-230	TXV	35,600	14.00	11.00	C35-48B	EL195UH070XE36B	8267149
13ACXN036-230	TXV	35,600	14.00	11.00	C35-48B	EL296UH070XE36B	8267155
13ACXN036-230	TXV	35,600	14.00	11.00	C35-48B	EL296UH070XV36B	8267150
13ACXN036-230	TXV	35,800	14.50	12.00	C35-48B	SL280UH090V36B	8267151
13ACXN036-230	TXV	36,000	14.50	12.00	C35-48B	SL280UH090V48B	8267152
13ACXN036-230	TXV	36,000	14.50	12.00	C35-48B	SL280UH090XV48B	8267153
13ACXN036-230	TXV	35,600	14.00	11.00	C35-48B	SLP98UH070XV36B	8267154
13ACXN036-230	TXV	35,400	13.00	11.00	C35-48C		8269491
13ACXN036-230	TXV	36,000	14.50	12.00	C35-48C	EL180UH090E60C	8267110
13ACXN036-230	TXV	35,800	14.50	12.00	C35-48C	EL180UH110E60C	8267106
13ACXN036-230	TXV	35,800	14.50	12.00	C35-48C	EL180UH110XE60C	8267108
13ACXN036-230	TXV	35,800	14.00	11.00	C35-48C	EL195UH090XE48C	8267111
13ACXN036-230	TXV	36,000	14.00	11.00	C35-48C	EL195UH110XE60C	8267112
13ACXN036-230	TXV	35,800	14.00	11.00	C35-48C	EL296UH090XE48C	8267122
13ACXN036-230	TXV	35,800	14.00	11.00	C35-48C	EL296UH090XV36C	8267113
13ACXN036-230	TXV	35,800	14.00	11.00	C35-48C	EL296UH090XV48C	8267114
13ACXN036-230	TXV	36,000	14.00	11.00	C35-48C	EL296UH110XE60C	8267123
13ACXN036-230	TXV	36,400	14.25	11.70	C35-48C	SL280UH090V60C	8267115

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	36,400	14.50	12.00	C35-48C	SL280UH090XV60C	8267117
13ACXN036-230	TXV	36,200	14.00	11.00	C35-48C	SL280UH110V60C	8267116
13ACXN036-230	TXV	36,200	14.00	11.00	C35-48C	SL280UH110XV60C	8267118
13ACXN036-230	TXV	35,800	14.00	11.00	C35-48C	SLP98UH090XV36C	8267119
13ACXN036-230	TXV	35,800	14.00	11.00	C35-48C	SLP98UH090XV48C	8267120
13ACXN036-230	TXV	36,200	14.50	12.00	C35-48C	SLP98UH110XV60C	8267121
13ACXN036-230	TXV	35,200	13.00	11.00	C35-50/60C		8267203
13ACXN036-230	TXV	36,000	14.50	12.00	C35-50/60C	EL180UH090E60C	8267210
13ACXN036-230	TXV	35,600	14.00	11.00	C35-50/60C	EL180UH110E60C	8267205
13ACXN036-230	TXV	35,600	14.00	11.00	C35-50/60C	EL180UH110XE60C	8267208
13ACXN036-230	TXV	35,800	14.00	11.00	C35-50/60C	EL195UH090XE48C	8267211
13ACXN036-230	TXV	36,000	14.00	11.00	C35-50/60C	EL195UH110XE60C	8267212
13ACXN036-230	TXV	35,800	14.00	11.00	C35-50/60C	EL296UH090XE48C	8267222
13ACXN036-230	TXV	35,800	14.00	11.00	C35-50/60C	EL296UH090XV36C	8267213
13ACXN036-230	TXV	35,600	14.00	11.00	C35-50/60C	EL296UH090XV48C	8267214
13ACXN036-230	TXV	36,000	14.00	11.00	C35-50/60C	EL296UH110XE60C	8267223
13ACXN036-230	TXV	36,200	14.25	11.70	C35-50/60C	SL280UH090V60C	8267215
13ACXN036-230	TXV	36,200	14.25	11.70	C35-50/60C	SL280UH090XV60C	8267217
13ACXN036-230	TXV	36,000	14.00	11.00	C35-50/60C	SL280UH110V60C	8267216
13ACXN036-230	TXV	36,000	14.00	11.00	C35-50/60C	SL280UH110XV60C	8267218
13ACXN036-230	TXV	35,800	14.00	11.00	C35-50/60C	SLP98UH090XV36C	8267219
13ACXN036-230	TXV	35,600	14.00	11.00	C35-50/60C	SLP98UH090XV48C	8267220
13ACXN036-230	TXV	36,000	14.00	11.00	C35-50/60C	SLP98UH110XV60C	8267221
13ACXN036-230	TXV	35,200	13.00	11.00	CBX25UH-042		7619778
13ACXN036-230	TXV	35,000	13.00	11.00	CBX25UHV-036		7622694
13ACXN036-230	TXV	36,000	14.50	12.20	CBX25UHV-042		7622696
13ACXN036-230	TXV	35,000	13.00	11.00	CBX27UH-036		7619417
13ACXN036-230	TXV	36,000	14.50	12.00	CBX27UH-042		7619418
13ACXN036-230	TXV	34,000	13.00	11.00	CBX32M-030		7619419
13ACXN036-230	TXV	34,400	13.00	11.00	CBX32M-036		7619420
13ACXN036-230	TXV	34,400	13.00	11.00	CBX32M-042		7619421
13ACXN036-230	TXV	35,400	13.00	11.00	CBX32M-048		7619422
13ACXN036-230	TXV	34,600	13.00	11.00	CBX32MV-036		7619423
13ACXN036-230	TXV	36,000	14.50	12.00	CBX32MV-048		7619424
13ACXN036-230	TXV	34,800	13.00	11.00	CBX40UHV-036		7619425
13ACXN036-230	TXV	35,600	13.00	11.00	CBX40UHV-042		7619426
13ACXN036-230	TXV	35,800	14.00	11.00	CBX40UHV-048		7619427
13ACXN036-230	TXV	34,800	14.00	11.00	CH23-41	EL180UH070E36B	7620714
13ACXN036-230	TXV	35,200	13.00	11.00	CH23-41	EL180UH090E48B	7620632
13ACXN036-230	TXV	34,800	14.00	11.00	CH23-51	EL180UH070E36B	7620715
13ACXN036-230	TXV	35,200	14.00	11.00	CH23-51	EL180UH090E48B	7620633
13ACXN036-230	TXV	34,800	13.00	11.00	CH23-51	EL296UH045XV36B	7619428
13ACXN036-230	TXV	35,800	13.00	11.00	CH33-43		7619526
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-43B	EL180UH070E36B	7620717
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-43B	EL180UH070XE36B	7620496
13ACXN036-230	TXV	36,200	14.50	12.00	CH33-43B	EL180UH090E48B	7620520
13ACXN036-230	TXV	36,200	14.50	12.00	CH33-43B	EL180UH090XE48B	7620123
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43B	EL195UH070XE36B	7619430
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43B	EL296UH070XE36B	7619533

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43B	EL296UH070XV36B	7619432
13ACXN036-230	TXV	35,800	14.00	11.00	CH33-43B	EL296UH090XV36C	7619431
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-43B	SL280UH090V36B	7619433
13ACXN036-230	TXV	36,400	14.50	12.00	CH33-43B	SL280UH090V48B	7619434
13ACXN036-230	TXV	36,400	14.50	12.00	CH33-43B	SL280UH090XV48B	7619435
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43B	SLP98UH070XV36B	7619436
13ACXN036-230	TXV	36,200	14.50	12.00	CH33-43C	EL180UH090E60C	7620801
13ACXN036-230	TXV	35,800	14.50	12.00	CH33-43C	EL180UH110E60C	7620451
13ACXN036-230	TXV	35,800	14.50	12.00	CH33-43C	EL180UH110XE60C	7620691
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43C	EL195UH090XE48C	7619437
13ACXN036-230	TXV	36,200	14.50	12.00	CH33-43C	EL195UH110XE60C	7619438
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43C	EL296UH090XE48C	7619534
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43C	EL296UH090XV36C	7619439
13ACXN036-230	TXV	35,800	14.50	12.00	CH33-43C	EL296UH090XV48C	7619440
13ACXN036-230	TXV	36,200	14.50	12.00	CH33-43C	EL296UH110XE60C	7619535
13ACXN036-230	TXV	36,400	14.25	11.70	CH33-43C	SL280UH090V60C	7619441
13ACXN036-230	TXV	36,400	14.25	11.70	CH33-43C	SL280UH090XV60C	7619443
13ACXN036-230	TXV	36,200	14.00	11.00	CH33-43C	SL280UH110V60C	7619442
13ACXN036-230	TXV	36,200	14.00	11.00	CH33-43C	SL280UH110XV60C	7619444
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-43C	SLP98UH090XV36C	7619445
13ACXN036-230	TXV	35,800	14.50	12.00	CH33-43C	SLP98UH090XV48C	7619446
13ACXN036-230	TXV	36,200	14.50	12.00	CH33-43C	SLP98UH110XV60C	7619447
13ACXN036-230	TXV	35,000	13.00	10.50	CH33-44/48		7619527
13ACXN036-230	TXV	35,400	14.00	11.00	CH33-44/48B	EL180UH070E36B	7620718
13ACXN036-230	TXV	35,400	14.00	11.00	CH33-44/48B	EL180UH070XE36B	7620497
13ACXN036-230	TXV	35,400	14.00	11.00	CH33-44/48B	EL180UH090E48B	7620521
13ACXN036-230	TXV	35,400	14.00	11.00	CH33-44/48B	EL180UH090XE48B	7620125
13ACXN036-230	TXV	35,600	14.00	11.00	CH33-44/48B	SL280UH090V36B	7619449
13ACXN036-230	TXV	35,600	14.00	11.00	CH33-44/48B	SL280UH090V48B	7619450
13ACXN036-230	TXV	35,600	14.00	11.00	CH33-44/48B	SL280UH090XV48B	7619451
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-48	EL180UH090E60C	7620803
13ACXN036-230	TXV	35,800	14.50	12.00	CH33-48	EL180UH110E60C	7620452
13ACXN036-230	TXV	35,800	14.50	12.00	CH33-48	EL180UH110XE60C	7620869
13ACXN036-230	TXV	35,800	14.00	11.00	CH33-48	EL296UH090XV36C	7619454
13ACXN036-230	TXV	35,600	14.00	11.00	CH33-48	EL296UH090XV48C	7619481
13ACXN036-230	TXV	36,200	14.25	11.70	CH33-48	SL280UH090V60C	7619482
13ACXN036-230	TXV	36,600	14.25	11.70	CH33-48	SL280UH090XV60C	7619457
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-48	SL280UH110V60C	7619483
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-48	SL280UH110XV60C	7619484
13ACXN036-230	TXV	35,800	14.00	11.00	CH33-48	SLP98UH090XV36C	7619485
13ACXN036-230	TXV	35,600	14.00	11.00	CH33-48	SLP98UH090XV48C	7619486
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-48	SLP98UH110XV60C	7619487
13ACXN036-230	TXV	35,800	14.00	11.00	CH33-48C	EL195UH090XE48C	7619452
13ACXN036-230	TXV	36,000	14.00	11.00	CH33-48C	EL195UH110XE60C	7619453
13ACXN036-230	TXV	36,400	14.00	11.00	CH33-48C	SL280UH110XV60C	7619757
13ACXN036-230	TXV	36,200	14.00	11.00	CH33-48C	SLP98UH090XV36C	7619758
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-48C	SLP98UH090XV48C	7619759
13ACXN036-230	TXV	36,400	14.50	12.00	CH33-48C	SLP98UH110XV60C	7619760
13ACXN036-230	TXV	35,600	13.00	11.00	CH33-50/60C		7619543

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	35,600	13.00	11.00	CH33-50/60C		7619756
13ACXN036-230	TXV	36,400	14.50	12.00	CH33-50/60C	EL180UH090E60C	7620797
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-50/60C	EL180UH110E60C	7620876
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-50/60C	EL180UH110XE60C	7620683
13ACXN036-230	TXV	36,200	14.00	11.00	CH33-50/60C	EL195UH090XE48C	7619488
13ACXN036-230	TXV	36,400	14.50	12.00	CH33-50/60C	EL195UH110XE60C	7619489
13ACXN036-230	TXV	36,200	14.00	12.00	CH33-50/60C	EL296UH090XV36C	7619490
13ACXN036-230	TXV	36,000	14.50	12.00	CH33-50/60C	EL296UH090XV48C	7619491
13ACXN036-230	TXV	36,600	14.25	12.00	CH33-50/60C	SL280UH090V60C	7619455
13ACXN036-230	TXV	36,400	14.00	11.00	CH33-50/60C	SL280UH110V60C	7619456
13ACXN036-230	TXV	36,000	13.00	11.00	CH35-42B		7623100
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH070E36B	7623112
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH070XE36B	7623113
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH090E48B	7623115
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42B	EL180UH090XE48B	7623116
13ACXN036-230	TXV	36,000	13.00	11.00	CH35-42B	EL195UH045XE36B	7623102
13ACXN036-230	TXV	36,000	14.00	11.50	CH35-42B	EL195UH070XE36B	7623103
13ACXN036-230	TXV	36,000	13.00	11.00	CH35-42B	EL296UH045XE36B	7623107
13ACXN036-230	TXV	35,800	14.00	11.50	CH35-42B	EL296UH045XV36B	7623105
13ACXN036-230	TXV	36,000	14.00	11.50	CH35-42B	EL296UH070XE36B	7623110
13ACXN036-230	TXV	36,000	14.00	11.50	CH35-42B	EL296UH070XV36B	7623108
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42B	SL280UH090V36B	7623118
13ACXN036-230	TXV	36,000	14.50	12.20	CH35-42B	SL280UH090V48B	7623120
13ACXN036-230	TXV	36,000	14.50	12.20	CH35-42B	SL280UH090XV48B	7623121
13ACXN036-230	TXV	36,000	14.25	11.50	CH35-42B	SLP98UH070XV36B	7623123
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42C	EL180UH090E60C	7623134
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42C	EL180UH110E60C	7623136
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42C	EL180UH110XE60C	7623138
13ACXN036-230	TXV	36,000	14.25	11.50	CH35-42C	EL195UH090XE48C	7623125
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42C	EL195UH110XE60C	7623126
13ACXN036-230	TXV	36,000	14.25	11.50	CH35-42C	EL296UH090XE48C	7623131
13ACXN036-230	TXV	36,000	14.25	11.50	CH35-42C	EL296UH090XV36C	7623128
13ACXN036-230	TXV	35,800	14.50	11.50	CH35-42C	EL296UH090XV48C	7623129
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42C	EL296UH110XE60C	7623133
13ACXN036-230	TXV	36,000	14.25	11.70	CH35-42C	SL280UH090V60C	7623139
13ACXN036-230	TXV	36,000	14.25	11.70	CH35-42C	SL280UH090XV60C	7623141
13ACXN036-230	TXV	36,000	14.00	11.50	CH35-42C	SL280UH110V60C	7623142
13ACXN036-230	TXV	36,000	14.00	11.50	CH35-42C	SL280UH110XV60C	7623144
13ACXN036-230	TXV	36,000	14.25	11.50	CH35-42C	SLP98UH090XV36C	7623146
13ACXN036-230	TXV	35,800	14.50	11.50	CH35-42C	SLP98UH090XV48C	7623147
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-42C	SLP98UH110XV60C	7623149
13ACXN036-230	TXV	35,200	13.00	11.00	CH35-48B		7623151
13ACXN036-230	TXV	35,600	14.25	11.50	CH35-48B	EL180UH070E36B	7623162
13ACXN036-230	TXV	35,600	14.25	11.50	CH35-48B	EL180UH070XE36B	7623164
13ACXN036-230	TXV	35,600	14.00	11.50	CH35-48B	EL180UH090E48B	7623165
13ACXN036-230	TXV	35,600	14.00	11.50	CH35-48B	EL180UH090XE48B	7623167
13ACXN036-230	TXV	35,400	13.00	11.00	CH35-48B	EL195UH045XE36B	7623152
13ACXN036-230	TXV	35,400	13.00	11.50	CH35-48B	EL195UH070XE36B	7623156
13ACXN036-230	TXV	35,400	13.00	11.00	CH35-48B	EL296UH045XE36B	7623154

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	35,400	13.00	11.50	CH35-48B	EL296UH045XV36B	7623159
13ACXN036-230	TXV	35,400	13.00	11.50	CH35-48B	EL296UH070XE36B	7623157
13ACXN036-230	TXV	35,400	13.00	11.50	CH35-48B	EL296UH070XV36B	7623160
13ACXN036-230	TXV	35,800	14.25	12.00	CH35-48B	SL280UH090V36B	7623169
13ACXN036-230	TXV	35,800	14.00	11.50	CH35-48B	SL280UH090V48B	7623170
13ACXN036-230	TXV	35,800	14.00	11.50	CH35-48B	SL280UH090XV48B	7623172
13ACXN036-230	TXV	35,400	13.00	11.50	CH35-48B	SLP98UH070XV36B	7623174
13ACXN036-230	TXV	35,400	13.00	11.00	CH35-48C		7623175
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-48C	EL180UH090E60C	7623187
13ACXN036-230	TXV	35,800	14.50	12.00	CH35-48C	EL180UH110E60C	7623188
13ACXN036-230	TXV	35,800	14.50	12.00	CH35-48C	EL180UH110XE60C	7623190
13ACXN036-230	TXV	35,800	14.25	11.50	CH35-48C	EL195UH090XE48C	7623177
13ACXN036-230	TXV	36,000	14.25	12.00	CH35-48C	EL195UH110XE60C	7623179
13ACXN036-230	TXV	35,800	14.25	11.50	CH35-48C	EL296UH090XE48C	7623183
13ACXN036-230	TXV	36,000	14.25	11.50	CH35-48C	EL296UH090XV36C	7623180
13ACXN036-230	TXV	35,800	14.25	12.00	CH35-48C	EL296UH090XV48C	7623182
13ACXN036-230	TXV	36,000	14.25	12.00	CH35-48C	EL296UH110XE60C	7623185
13ACXN036-230	TXV	36,000	14.50	11.70	CH35-48C	SL280UH090V60C	7623192
13ACXN036-230	TXV	36,000	14.50	11.70	CH35-48C	SL280UH090XV60C	7623193
13ACXN036-230	TXV	36,000	14.00	11.50	CH35-48C	SL280UH110V60C	7623195
13ACXN036-230	TXV	36,000	14.00	11.50	CH35-48C	SL280UH110XV60C	7623197
13ACXN036-230	TXV	36,000	14.25	11.50	CH35-48C	SLP98UH090XV36C	7623198
13ACXN036-230	TXV	35,800	14.25	12.00	CH35-48C	SLP98UH090XV48C	7623200
13ACXN036-230	TXV	36,000	14.25	12.00	CH35-48C	SLP98UH110XV60C	7623201
13ACXN036-230	TXV	35,800	13.00	11.00	CH35-51C		7623203
13ACXN036-230	TXV	36,000	14.50	12.20	CH35-51C	EL180UH090E60C	7623215
13ACXN036-230	TXV	36,000	14.50	12.20	CH35-51C	EL180UH110E60C	7623217
13ACXN036-230	TXV	36,000	14.50	12.20	CH35-51C	EL180UH110XE60C	7623218
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	EL195UH090XE48C	7623205
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	EL195UH110XE60C	7623208
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH090XE48C	7623206
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH090XV36C	7623211
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH090XV48C	7623213
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	EL296UH110XE60C	7623210
13ACXN036-230	TXV	36,000	14.50	12.20	CH35-51C	SL280UH090V60C	7623220
13ACXN036-230	TXV	36,000	14.50	12.20	CH35-51C	SL280UH090XV60C	7623222
13ACXN036-230	TXV	36,000	14.25	11.70	CH35-51C	SL280UH110V60C	7623223
13ACXN036-230	TXV	36,000	14.25	11.70	CH35-51C	SL280UH110XV60C	7623225
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	SLP98UH090XV36C	7623227
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	SLP98UH090XV48C	7623229
13ACXN036-230	TXV	36,000	14.50	12.00	CH35-51C	SLP98UH110XV60C	7623230
13ACXN036-230	TXV	35,200	14.00	11.00	CR33-48	EL180DF070E36B	7620308
13ACXN036-230	TXV	35,200	14.00	11.00	CR33-48	EL180DF090E48B	7619791
13ACXN036-230	TXV	35,600	14.00	11.00	CR33-48	EL180DF110E60C	7619796
13ACXN036-230	TXV	35,400	14.00	11.00	CR33-48	EL195DF110XE60C	7619459
13ACXN036-230	TXV	35,400	14.00	11.00	CR33-48	SL280DF110V60C	7619542
13ACXN036-230	TXV	35,200	14.00	11.00	CR33-48B	SL280DF090V48B	7619458
13ACXN036-230	TXV	36,000	14.00	11.00	CR33-50/60	EL180DF110E60C	7619797
13ACXN036-230	TXV	35,800	14.00	11.00	CR33-50/60	EL195DF090XE48C	7619461

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	35,800	14.00	11.00	CR33-50/60	EL296DF090XE48C	7619536
13ACXN036-230	TXV	35,800	14.00	11.00	CR33-50/60	EL296DF090XV60C	7619462
13ACXN036-230	TXV	35,800	14.00	11.00	CR33-50/60	SL280DF110V60C	7619463
13ACXN036-230	TXV	35,800	14.00	11.00	CR33-50/60	SLP98DF090XV48C	7619464
13ACXN036-230	TXV	35,200	13.00	11.00	CX34-31	EL180UH045E36A	7620280
13ACXN036-230	TXV	35,200	13.00	11.00	CX34-31	EL180UH045XE36A	7619958
13ACXN036-230	TXV	35,000	13.00	11.00	CX34-31	SL280UH070V36A	7619465
13ACXN036-230	TXV	35,000	13.00	11.00	CX34-31	SL280UH070XV36A	7619466
13ACXN036-230	TXV	35,000	14.00	11.00	CX34-31B	EL180UH070E36B	7620710
13ACXN036-230	TXV	35,000	14.00	11.00	CX34-31B	EL180UH070XE36B	7620494
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-31B	EL180UH090E48B	7620629
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-31B	EL180UH090XE48B	7620196
13ACXN036-230	TXV	35,000	13.00	11.00	CX34-31B	EL195UH045XE36B	7619467
13ACXN036-230	TXV	34,800	13.00	11.00	CX34-31B	EL195UH070XE36B	7619468
13ACXN036-230	TXV	34,800	13.00	11.00	CX34-31B	EL296UH045XV36B	7619469
13ACXN036-230	TXV	35,000	13.00	11.00	CX34-31B	EL296UH070XV36B	7619470
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-31B	SL280UH090V36B	7619471
13ACXN036-230	TXV	35,000	13.00	11.00	CX34-31B	SLP98UH070XV36B	7619472
13ACXN036-230	TXV	35,000	13.00	10.70	CX34-38		7619480
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-38	SL280UH070V36A	7619473
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-38	SL280UH070XV36A	7619474
13ACXN036-230	TXV	35,600	14.50	12.00	CX34-38B	EL180UH070E36B	7620712
13ACXN036-230	TXV	35,600	14.50	12.00	CX34-38B	EL180UH070XE36B	7620495
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-38B	EL180UH090E48B	7620630
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-38B	EL180UH090XE48B	7620198
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-38B	EL195UH070XE36B	7619761
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-38B	EL296UH045XV36B	7619762
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-38B	EL296UH070XV36B	7619763
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-38B	SL280UH090V36B	7619475
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-38B	SL280UH090V48B	7619476
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-38B	SL280UH090XV48B	7619477
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-38B	SLP98UH070XV36B	7619478
13ACXN036-230	TXV	35,400	13.00	11.00	CX34-43		7619479
13ACXN036-230	TXV	36,000	14.50	12.00	CX34-43	EL180UH090E60C	7625396
13ACXN036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH110E60C	7625398
13ACXN036-230	TXV	35,800	14.50	12.00	CX34-43	EL180UH110XE60C	7620871
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-43	EL195UH090XE48C	7619496
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-43	EL195UH110XE60C	7619497
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-43	EL296UH090XE48C	7619538
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-43	EL296UH090XV36C	7619498
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-43	EL296UH090XV48C	7619499
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-43	EL296UH110XE60C	7619539
13ACXN036-230	TXV	36,400	14.25	11.70	CX34-43	SL280UH090V60C	7619500
13ACXN036-230	TXV	36,400	14.25	11.70	CX34-43	SL280UH090XV60C	7619502
13ACXN036-230	TXV	36,200	14.00	11.00	CX34-43	SL280UH110V60C	7619501
13ACXN036-230	TXV	36,200	14.00	11.00	CX34-43	SL280UH110XV60C	7619503
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-43	SLP98UH090XV36C	7619504
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-43	SLP98UH090XV48C	7619505
13ACXN036-230	TXV	36,200	14.50	12.00	CX34-43	SLP98UH110XV60C	7619506

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	35,800	14.50	12.00	CX34-43B	EL180UH070E36B	7625394
13ACXN036-230	TXV	35,800	14.50	12.00	CX34-43B	EL180UH070XE36B	7625402
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-43B	EL180UH090E48B	7625404
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-43B	EL180UH090XE48B	7625400
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-43B	EL195UH070XE36B	7625391
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-43B	EL296UH070XE36B	7619537
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-43B	EL296UH070XV36B	7625392
13ACXN036-230	TXV	35,800	14.50	12.00	CX34-43B	SL280UH090V36B	7619492
13ACXN036-230	TXV	33,600	13.50	12.00	CX34-43B	SL280UH090V48B	7619493
13ACXN036-230	TXV	33,600	13.50	12.00	CX34-43B	SL280UH090XV48B	7619494
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-43B	SLP98UH070XV36B	7619495
13ACXN036-230	TXV	34,800	13.00	10.50	CX34-44/48		7619507
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH070E36B	7620720
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH070XE36B	7620509
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL180UH090E48B	7620635
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL180UH090E60C	7620805
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL180UH090XE48B	7620127
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH110E60C	7620461
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL180UH110XE60C	7620693
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-44/48	EL195UH090XE48C	7619511
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-44/48	EL195UH110XE60C	7619512
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-44/48	EL296UH090XV36C	7619513
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-44/48	EL296UH090XV48C	7619514
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-44/48	SL280UH090V36B	7619508
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-44/48	SL280UH090V48B	7619509
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-44/48	SL280UH090V60C	7619515
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-44/48	SL280UH090XV48B	7619510
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-44/48	SL280UH090XV60C	7619517
13ACXN036-230	TXV	35,600	13.00	11.00	CX34-44/48	SL280UH110V60C	7619516
13ACXN036-230	TXV	35,600	13.00	11.00	CX34-44/48	SL280UH110XV60C	7619518
13ACXN036-230	TXV	35,400	14.00	11.00	CX34-44/48	SLP98UH090XV36C	7619519
13ACXN036-230	TXV	35,200	14.00	11.00	CX34-44/48	SLP98UH090XV48C	7619520
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-44/48	SLP98UH110XV60C	7619521
13ACXN036-230	TXV	35,200	13.00	11.00	CX34-50/60C		7619522
13ACXN036-230	TXV	36,000	14.50	12.00	CX34-50/60C	EL180UH090E60C	7620828
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-50/60C	EL180UH110E60C	7620029
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-50/60C	EL180UH110XE60C	7620706
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-50/60C	EL195UH090XE48C	7619764
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-50/60C	EL195UH110XE60C	7619765
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-50/60C	EL296UH090XE48C	7619540
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-50/60C	EL296UH090XV36C	7619766
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-50/60C	EL296UH090XV48C	7619767
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-50/60C	EL296UH110XE60C	7619541
13ACXN036-230	TXV	36,200	14.25	11.70	CX34-50/60C	SL280UH090V60C	7619768
13ACXN036-230	TXV	36,200	14.25	11.70	CX34-50/60C	SL280UH090XV60C	7619770
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-50/60C	SL280UH110V60C	7619769
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-50/60C	SL280UH110XV60C	7619771
13ACXN036-230	TXV	35,800	14.00	11.00	CX34-50/60C	SLP98UH090XV36C	7619772
13ACXN036-230	TXV	35,600	14.00	11.00	CX34-50/60C	SLP98UH090XV48C	7619773

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	36,000	14.00	11.00	CX34-50/60C	SLP98UH110XV60C	7619774
13ACXN036-230	TXV	35,200	13.00	11.00	CX35-30A	EL180UH045E36A	8266619
13ACXN036-230	TXV	35,200	13.00	11.00	CX35-30A	EL180UH045XE36A	8266618
13ACXN036-230	TXV	35,000	13.00	11.00	CX35-30A	SL280UH070V36A	8266621
13ACXN036-230	TXV	35,000	13.00	11.00	CX35-30A	SL280UH070XV36A	8266622
13ACXN036-230	TXV	35,000	14.00	11.00	CX35-30B	EL180UH070E36B	8266630
13ACXN036-230	TXV	35,000	14.00	11.00	CX35-30B	EL180UH070XE36B	8266628
13ACXN036-230	TXV	35,200	14.00	11.00	CX35-30B	EL180UH090E48B	8266629
13ACXN036-230	TXV	35,200	14.00	11.00	CX35-30B	EL180UH090XE48B	8266632
13ACXN036-230	TXV	35,000	13.00	11.00	CX35-30B	EL195UH045XE36B	8266637
13ACXN036-230	TXV	34,800	13.00	11.00	CX35-30B	EL195UH070XE36B	8266638
13ACXN036-230	TXV	34,800	13.00	11.00	CX35-30B	EL296UH045XV36B	8266639
13ACXN036-230	TXV	35,000	13.00	11.00	CX35-30B	EL296UH070XV36B	8266640
13ACXN036-230	TXV	35,200	14.00	11.00	CX35-30B	SL280UH090V36B	8266641
13ACXN036-230	TXV	35,000	13.00	11.00	CX35-30B	SLP98UH070XV36B	8266642
13ACXN036-230	TXV	35,000	13.00	10.70	CX35-36A		8266701
13ACXN036-230	TXV	35,200	14.00	11.00	CX35-36A	SL280UH070V36A	8266707
13ACXN036-230	TXV	35,200	14.00	11.00	CX35-36A	SL280UH070XV36A	8266708
13ACXN036-230	TXV	35,000	13.00	10.70	CX35-36B		8269492
13ACXN036-230	TXV	35,600	14.50	12.00	CX35-36B	EL180UH070E36B	8266717
13ACXN036-230	TXV	35,600	14.50	12.00	CX35-36B	EL180UH070XE36B	8266715
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-36B	EL180UH090E48B	8266716
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-36B	EL180UH090XE48B	8266719
13ACXN036-230	TXV	35,400	14.00	11.00	CX35-36B	EL195UH070XE36B	8266727
13ACXN036-230	TXV	35,200	14.00	11.00	CX35-36B	EL296UH045XV36B	8266728
13ACXN036-230	TXV	35,400	14.00	11.00	CX35-36B	EL296UH070XV36B	8266729
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-36B	SL280UH090V36B	8266723
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-36B	SL280UH090V48B	8266724
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-36B	SL280UH090XV48B	8266725
13ACXN036-230	TXV	35,400	14.00	11.00	CX35-36B	SLP98UH070XV36B	8266726
13ACXN036-230	TXV	35,400	13.00	11.00	CX35-48B		8269493
13ACXN036-230	TXV	35,800	14.50	12.00	CX35-48B	EL180UH070E36B	8266751
13ACXN036-230	TXV	35,800	14.50	12.00	CX35-48B	EL180UH070XE36B	8266753
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-48B	EL180UH090E48B	8266775
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-48B	EL180UH090XE48B	8266752
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-48B	EL195UH070XE36B	8266749
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-48B	EL296UH070XE36B	8266764
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-48B	EL296UH070XV36B	8266750
13ACXN036-230	TXV	35,800	14.50	12.00	CX35-48B	SL280UH090V36B	8266760
13ACXN036-230	TXV	36,000	14.50	12.00	CX35-48B	SL280UH090V48B	8266761
13ACXN036-230	TXV	36,000	14.50	12.00	CX35-48B	SL280UH090XV48B	8266762
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-48B	SLP98UH070XV36B	8266763
13ACXN036-230	TXV	35,400	13.00	11.00	CX35-48C		8266776
13ACXN036-230	TXV	36,000	14.50	12.00	CX35-48C	EL180UH090E60C	8266782
13ACXN036-230	TXV	35,800	14.50	12.00	CX35-48C	EL180UH110E60C	8266783
13ACXN036-230	TXV	35,800	14.50	12.00	CX35-48C	EL180UH110XE60C	8266787
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-48C	EL195UH090XE48C	8266788
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-48C	EL195UH110XE60C	8266789
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-48C	EL296UH090XE48C	8266799

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.

All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-48C	EL296UH090XV36C	8266790
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-48C	EL296UH090XV48C	8266791
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-48C	EL296UH110XE60C	8266800
13ACXN036-230	TXV	36,400	14.25	11.70	CX35-48C	SL280UH090V60C	8266792
13ACXN036-230	TXV	36,400	14.25	11.70	CX35-48C	SL280UH090XV60C	8266794
13ACXN036-230	TXV	36,200	14.00	11.00	CX35-48C	SL280UH110V60C	8266793
13ACXN036-230	TXV	36,200	14.00	11.00	CX35-48C	SL280UH110XV60C	8266795
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-48C	SLP98UH090XV36C	8266796
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-48C	SLP98UH090XV48C	8266797
13ACXN036-230	TXV	36,200	14.50	12.00	CX35-48C	SLP98UH110XV60C	8266798
13ACXN036-230	TXV	35,200	13.00	11.00	CX35-50/60C		8266851
13ACXN036-230	TXV	36,000	14.50	12.00	CX35-50/60C	EL180UH090E60C	8266860
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-50/60C	EL180UH110E60C	8266861
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-50/60C	EL180UH110XE60C	8266859
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-50/60C	EL195UH090XE48C	8266862
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-50/60C	EL195UH110XE60C	8266863
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-50/60C	EL296UH090XE48C	8266857
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-50/60C	EL296UH090XV36C	8266864
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-50/60C	EL296UH090XV48C	8266865
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-50/60C	EL296UH110XE60C	8266858
13ACXN036-230	TXV	36,200	14.25	11.70	CX35-50/60C	SL280UH090V60C	8266866
13ACXN036-230	TXV	36,200	14.25	11.70	CX35-50/60C	SL280UH090XV60C	8266868
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-50/60C	SL280UH110V60C	8266867
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-50/60C	SL280UH110XV60C	8266869
13ACXN036-230	TXV	35,800	14.00	11.00	CX35-50/60C	SLP98UH090XV36C	8266870
13ACXN036-230	TXV	35,600	14.00	11.00	CX35-50/60C	SLP98UH090XV48C	8266871
13ACXN036-230	TXV	36,000	14.00	11.00	CX35-50/60C	SLP98UH110XV60C	8266872
13ACXN042-230	RFC	41,500	13.00	11.00	C33-38		7617784
13ACXN042-230	RFC	41,500	13.00	11.00	C33-43		7617785
13ACXN042-230	RFC	42,000	13.00	11.00	C33-49		7617793
13ACXN042-230	RFC	41,000	13.00	10.50	C33-50/60C		7617804
13ACXN042-230	RFC	42,500	13.00	11.00	C33-62C		7617931
13ACXN042-230	RFC	42,000	13.00	11.00	C35-49C		8267169
13ACXN042-230	RFC	41,500	13.00	11.00	CH33-43		7617834
13ACXN042-230	RFC	41,500	13.00	11.00	CH33-48		7617843
13ACXN042-230	RFC	42,000	13.00	11.00	CH33-49		7617844
13ACXN042-230	RFC	42,000	13.00	11.00	CH33-50/60C		7617853
13ACXN042-230	TXV	41,500	13.00	11.00	C33-38B		7622658
13ACXN042-230	TXV	41,500	13.00	11.00	C33-43		7622661
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH090E60C	7620730
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH110E60C	7620416
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL180UH110XE60C	7620643
13ACXN042-230	TXV	41,500	14.00	11.50	C33-43	EL195UH090XE48C	7617786
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL195UH110XE60C	7617787
13ACXN042-230	TXV	41,500	14.00	11.50	C33-43	EL296UH090XE48C	7619115
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH090XV48C	7617788
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH090XV60C	7617789
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH110XE60C	7619116
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH110XV48C	7619352

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	EL296UH110XV60C	7617790
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH090V60C	7617906
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH090XV60C	7617907
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH110V60C	7617908
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SL280UH110XV60C	7617909
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SLO185B124/141V60	7622781
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SLO185UF124/141V60	7622765
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SLP98UH090XV48C	7617791
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43	SLP98UH110XV60C	7617792
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43B	EL180UH090E48B	7620402
13ACXN042-230	TXV	42,000	14.00	11.50	C33-43B	EL180UH090XE48B	7619913
13ACXN042-230	TXV	41,000	13.00	10.50	C33-48		7617910
13ACXN042-230	TXV	41,500	14.00	11.50	C33-48C	EL180UH090E60C	7620731
13ACXN042-230	TXV	42,000	13.00	11.00	C33-49		7622664
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL180UH090E60C	7620733
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL180UH110E60C	7620459
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL180UH110XE60C	7620644
13ACXN042-230	TXV	42,000	14.00	11.50	C33-49	EL195UH090XE48C	7617794
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL195UH110XE60C	7617795
13ACXN042-230	TXV	42,000	14.00	11.50	C33-49	EL296UH090XE48C	7619117
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH090XV48C	7617796
13ACXN042-230	TXV	42,000	14.00	11.50	C33-49	EL296UH090XV60C	7617797
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH110XE60C	7619118
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH110XV48C	7617798
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	EL296UH110XV60C	7617799
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH090V60C	7617911
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH090XV60C	7617913
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH110V60C	7617912
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SL280UH110XV60C	7617914
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SLO185B124/141V60	7622783
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SLO185UF124/141V60	7622767
13ACXN042-230	TXV	42,000	14.00	11.50	C33-49	SLP98UH090XV36C	7617800
13ACXN042-230	TXV	42,000	14.00	11.50	C33-49	SLP98UH090XV48C	7617801
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SLP98UH090XV60C	7617802
13ACXN042-230	TXV	42,500	14.00	11.50	C33-49	SLP98UH110XV60C	7617803
13ACXN042-230	TXV	41,000	13.00	10.50	C33-50/60C		7622666
13ACXN042-230	TXV	42,000	14.00	11.50	C33-50/60C	EL180UH090E60C	7620734
13ACXN042-230	TXV	41,500	14.00	11.50	C33-50/60C	EL180UH110E60C	7620460
13ACXN042-230	TXV	41,500	14.00	11.50	C33-50/60C	EL180UH110XE60C	7620646
13ACXN042-230	TXV	41,000	13.00	11.00	C33-50/60C	SLP98UH090XV36C	7617828
13ACXN042-230	TXV	41,000	13.00	11.00	C33-50/60C	SLP98UH090XV48C	7617829
13ACXN042-230	TXV	41,500	13.00	11.00	C33-50/60C	SLP98UH090XV60C	7617830
13ACXN042-230	TXV	41,000	13.00	11.00	C33-50/60C	SLP98UH110XV60C	7617831
13ACXN042-230	TXV	42,500	14.00	11.50	C33-60D	SLO185B124/141V60	7622786
13ACXN042-230	TXV	42,500	14.00	11.50	C33-60D	SLO185UF124/141V60	7622770
13ACXN042-230	TXV	42,500	13.00	11.00	C33-62C		7622668
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	EL180UH090E60C	7620736
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	EL180UH110E60C	7620480
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	EL180UH110XE60C	7620648

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	43,000	14.00	12.00	C33-62C	EL195UH090XE48C	7617805
13ACXN042-230	TXV	43,500	14.00	12.00	C33-62C	EL195UH110XE60C	7617806
13ACXN042-230	TXV	43,000	14.00	12.00	C33-62C	EL296UH090XE48C	7619119
13ACXN042-230	TXV	43,000	14.00	12.00	C33-62C	EL296UH090XV48C	7617807
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	EL296UH090XV60C	7617808
13ACXN042-230	TXV	43,500	14.00	12.00	C33-62C	EL296UH110XE60C	7619120
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	EL296UH110XV48C	7619353
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	EL296UH110XV60C	7617809
13ACXN042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH090V60C	7617810
13ACXN042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH090XV60C	7617812
13ACXN042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH110V60C	7617811
13ACXN042-230	TXV	43,500	14.50	12.00	C33-62C	SL280UH110XV60C	7617813
13ACXN042-230	TXV	43,500	14.50	12.00	C33-62C	SLO185B124/141V60	7622784
13ACXN042-230	TXV	43,500	14.50	12.00	C33-62C	SLO185UF124/141V60	7622768
13ACXN042-230	TXV	43,000	14.00	11.50	C33-62C	SLP98UH090XV36C	7617814
13ACXN042-230	TXV	43,000	14.00	12.00	C33-62C	SLP98UH090XV48C	7617815
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	SLP98UH090XV60C	7617816
13ACXN042-230	TXV	43,000	14.50	12.00	C33-62C	SLP98UH110XV60C	7617817
13ACXN042-230	TXV	42,500	14.50	11.50	C33-62D	SLO185B124/141V60	7622788
13ACXN042-230	TXV	42,500	14.50	11.50	C33-62D	SLO185UF124/141V60	7622771
13ACXN042-230	TXV	40,000	13.00	11.00	C35-30/36B		8269501
13ACXN042-230	TXV	41,000	13.50	11.50	C35-30/36B	EL180UH090E48B	8269502
13ACXN042-230	TXV	41,000	13.50	11.50	C35-30/36B	EL180UH090XE48B	8269503
13ACXN042-230	TXV	40,500	13.00	11.00	C35-30/36B	EL296UH070XV36B	8269504
13ACXN042-230	TXV	41,000	13.50	11.50	C35-30/36B	SL280UH090V48B	8269506
13ACXN042-230	TXV	41,000	13.50	11.50	C35-30/36B	SL280UH090XV48B	8269505
13ACXN042-230	TXV	40,500	13.00	11.00	C35-30/36B	SLP98UH070XV36B	8269507
13ACXN042-230	TXV	40,000	13.00	11.00	C35-30/36C		8269508
13ACXN042-230	TXV	40,000	13.90	11.65	C35-30/36C	CBWMV-60C-100	8269521
13ACXN042-230	TXV	40,000	13.90	11.65	C35-30/36C	CBWMV-60C-120	8269518
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	EL180UH090E60C	8269509
13ACXN042-230	TXV	40,500	14.00	11.50	C35-30/36C	EL180UH110E60C	8269511
13ACXN042-230	TXV	40,500	14.00	11.50	C35-30/36C	EL180UH110XE60C	8269510
13ACXN042-230	TXV	40,500	13.50	11.50	C35-30/36C	EL296UH090XV36C	8269512
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	EL296UH090XV48C	8269513
13ACXN042-230	TXV	41,000	13.50	11.50	C35-30/36C	EL296UH090XV60C	8269514
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	EL296UH110XV60C	8269515
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	SL280UH090V60C	8269519
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	SL280UH090XV60C	8269516
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	SL280UH110V60C	8269520
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	SL280UH110XV60C	8269517
13ACXN042-230	TXV	40,500	13.50	11.50	C35-30/36C	SLP98UH090XV36C	8269523
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	SLP98UH090XV48C	8269524
13ACXN042-230	TXV	41,000	13.50	11.50	C35-30/36C	SLP98UH090XV60C	8269525
13ACXN042-230	TXV	41,000	14.00	11.50	C35-30/36C	SLP98UH110XV60C	8269522
13ACXN042-230	TXV	41,500	13.00	11.00	C35-30B		8269494
13ACXN042-230	TXV	42,000	14.00	12.00	C35-30B	EL180UH090E48B	8269495
13ACXN042-230	TXV	42,000	14.00	12.00	C35-30B	EL180UH090XE48B	8269496
13ACXN042-230	TXV	42,000	13.50	11.50	C35-30B	EL296UH070XV36B	8269497

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,500	14.00	12.00	C35-30B	SL280UH090V48B	8269499
13ACXN042-230	TXV	42,500	14.00	12.00	C35-30B	SL280UH090XV48B	8269498
13ACXN042-230	TXV	42,000	13.50	11.50	C35-30B	SLP98UH070XV36B	8269500
13ACXN042-230	TXV	41,500	13.00	11.00	C35-36B		8267059
13ACXN042-230	TXV	42,500	14.00	12.00	C35-36B	EL180UH090E48B	8269526
13ACXN042-230	TXV	42,500	14.00	12.00	C35-36B	EL180UH090XE48B	8269527
13ACXN042-230	TXV	42,500	13.50	11.50	C35-36B	EL296UH070XV36B	8269528
13ACXN042-230	TXV	43,000	14.00	12.00	C35-36B	SL280UH090V48B	8269530
13ACXN042-230	TXV	43,000	14.00	12.00	C35-36B	SL280UH090XV48B	8269529
13ACXN042-230	TXV	42,500	13.50	11.50	C35-36B	SLP98UH070XV36B	8269531
13ACXN042-230	TXV	41,500	13.00	11.00	C35-48B		8267099
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48B	EL180UH090E48B	8267139
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48B	EL180UH090XE48B	8267144
13ACXN042-230	TXV	42,500	14.00	11.50	C35-48B	EL296UH070XV36B	8269538
13ACXN042-230	TXV	43,000	14.50	12.00	C35-48B	SL280UH090V48B	8269540
13ACXN042-230	TXV	43,000	14.50	12.00	C35-48B	SL280UH090XV48B	8269539
13ACXN042-230	TXV	42,500	14.00	11.50	C35-48B	SLP98UH070XV36B	8269541
13ACXN042-230	TXV	42,000	13.50	11.50	C35-48C		8269532
13ACXN042-230	TXV	42,000	14.50	12.10	C35-48C	CBWMV-60C-100	8269535
13ACXN042-230	TXV	42,000	14.45	12.05	C35-48C	CBWMV-60C-120	8269534
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL180UH090E60C	8267109
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL180UH110E60C	8267105
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL180UH110XE60C	8267107
13ACXN042-230	TXV	41,500	14.00	11.50	C35-48C	EL195UH090XE48C	8267128
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL195UH110XE60C	8267129
13ACXN042-230	TXV	41,500	14.00	11.50	C35-48C	EL296UH090XE48C	8267124
13ACXN042-230	TXV	43,000	14.50	12.00	C35-48C	EL296UH090XV36C	8269533
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL296UH090XV48C	8267130
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL296UH090XV60C	8267131
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL296UH110XE60C	8267125
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL296UH110XV48C	8267127
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	EL296UH110XV60C	8267132
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SL280UH090V60C	8267135
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SL280UH090XV60C	8267136
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SL280UH110V60C	8267137
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SL280UH110XV60C	8267138
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SLO185B124/141V60	8267104
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SLO185UF124/141V60	8267103
13ACXN042-230	TXV	43,000	14.50	12.00	C35-48C	SLP98UH090XV36C	8269537
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SLP98UH090XV48C	8267133
13ACXN042-230	TXV	43,500	14.50	12.00	C35-48C	SLP98UH090XV60C	8269536
13ACXN042-230	TXV	42,000	14.00	11.50	C35-48C	SLP98UH110XV60C	8267134
13ACXN042-230	TXV	42,500	14.65	12.20	C35-49C	CBWMV-60C-100	8269543
13ACXN042-230	TXV	42,500	14.60	12.15	C35-49C	CBWMV-60C-120	8269544
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL180UH090E60C	8267178
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL180UH110E60C	8267175
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL180UH110XE60C	8267176
13ACXN042-230	TXV	42,000	14.00	11.50	C35-49C	EL195UH090XE48C	8267186
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL195UH110XE60C	8267187

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,000	14.00	11.50	C35-49C	EL296UH090XE48C	8267183
13ACXN042-230	TXV	43,500	14.50	12.00	C35-49C	EL296UH090XV36C	8269542
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL296UH090XV48C	8267188
13ACXN042-230	TXV	42,000	14.00	11.50	C35-49C	EL296UH090XV60C	8267189
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL296UH110XE60C	8267184
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL296UH110XV48C	8267190
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	EL296UH110XV60C	8267191
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SL280UH090V60C	8267196
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SL280UH090XV60C	8267198
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SL280UH110V60C	8267197
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SL280UH110XV60C	8267199
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SLO185B124/141V60	8267173
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SLO185UF124/141V60	8267172
13ACXN042-230	TXV	42,000	14.00	11.50	C35-49C	SLP98UH090XV36C	8267192
13ACXN042-230	TXV	42,000	14.00	11.50	C35-49C	SLP98UH090XV48C	8267193
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SLP98UH090XV60C	8267194
13ACXN042-230	TXV	42,500	14.00	11.50	C35-49C	SLP98UH110XV60C	8267195
13ACXN042-230	TXV	41,000	13.00	10.50	C35-50/60C		8267202
13ACXN042-230	TXV	42,000	14.40	12.10	C35-50/60C	CBWMV-60C-100	8269559
13ACXN042-230	TXV	42,000	14.40	12.10	C35-50/60C	CBWMV-60C-120	8269560
13ACXN042-230	TXV	42,000	14.00	11.50	C35-50/60C	EL180UH090E60C	8267209
13ACXN042-230	TXV	41,500	14.00	11.50	C35-50/60C	EL180UH110E60C	8267206
13ACXN042-230	TXV	41,500	14.00	11.50	C35-50/60C	EL180UH110XE60C	8267207
13ACXN042-230	TXV	42,000	14.00	11.50	C35-50/60C	EL195UH090XE48C	8269553
13ACXN042-230	TXV	42,500	14.00	11.50	C35-50/60C	EL195UH110XE60C	8269554
13ACXN042-230	TXV	42,000	14.00	11.50	C35-50/60C	EL296UH090XE48C	8269551
13ACXN042-230	TXV	42,500	14.00	12.00	C35-50/60C	EL296UH090XV36C	8269545
13ACXN042-230	TXV	42,500	14.50	12.00	C35-50/60C	EL296UH090XV48C	8269546
13ACXN042-230	TXV	43,000	14.00	12.00	C35-50/60C	EL296UH090XV60C	8269547
13ACXN042-230	TXV	42,500	14.00	11.50	C35-50/60C	EL296UH110XE60C	8269552
13ACXN042-230	TXV	43,000	14.50	12.00	C35-50/60C	EL296UH110XV60C	8269548
13ACXN042-230	TXV	43,000	14.50	12.00	C35-50/60C	SL280UH090V60C	8269557
13ACXN042-230	TXV	43,000	14.50	12.00	C35-50/60C	SL280UH090XV60C	8269555
13ACXN042-230	TXV	43,000	14.50	12.00	C35-50/60C	SL280UH110V60C	8269558
13ACXN042-230	TXV	43,000	14.50	12.00	C35-50/60C	SL280UH110XV60C	8269556
13ACXN042-230	TXV	42,500	14.50	12.00	C35-50/60C	SLO185B124/141V60	8269549
13ACXN042-230	TXV	42,500	14.50	12.00	C35-50/60C	SLO185UF124/141V60	8269550
13ACXN042-230	TXV	41,000	13.00	11.00	C35-50/60C	SLP98UH090XV36C	8267224
13ACXN042-230	TXV	41,000	13.00	11.00	C35-50/60C	SLP98UH090XV48C	8267225
13ACXN042-230	TXV	41,500	13.00	11.00	C35-50/60C	SLP98UH090XV60C	8267226
13ACXN042-230	TXV	41,000	13.00	11.00	C35-50/60C	SLP98UH110XV60C	8267227
13ACXN042-230	TXV	42,500	13.00	11.00	C35-60C		8267228
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	EL180UH090E60C	8267237
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	EL180UH110E60C	8267234
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	EL180UH110XE60C	8267235
13ACXN042-230	TXV	43,000	14.00	12.00	C35-60C	EL195UH090XE48C	8267257
13ACXN042-230	TXV	43,500	14.00	12.00	C35-60C	EL195UH110XE60C	8267258
13ACXN042-230	TXV	43,000	14.00	12.00	C35-60C	EL296UH090XE48C	8267252
13ACXN042-230	TXV	43,000	14.00	12.00	C35-60C	EL296UH090XV48C	8267259

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	EL296UH090XV60C	8267260
13ACXN042-230	TXV	43,500	14.00	12.00	C35-60C	EL296UH110XE60C	8267253
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	EL296UH110XV48C	8267256
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	EL296UH110XV60C	8267261
13ACXN042-230	TXV	43,500	14.50	12.00	C35-60C	SL280UH090V60C	8267262
13ACXN042-230	TXV	43,500	14.50	12.00	C35-60C	SL280UH090XV60C	8267264
13ACXN042-230	TXV	43,500	14.50	12.00	C35-60C	SL280UH110V60C	8267263
13ACXN042-230	TXV	43,500	14.50	12.00	C35-60C	SL280UH110XV60C	8267265
13ACXN042-230	TXV	43,500	14.50	12.00	C35-60C	SLO185B124/141V60	8267232
13ACXN042-230	TXV	43,500	14.50	12.00	C35-60C	SLO185UF124/141V60	8267231
13ACXN042-230	TXV	43,000	14.00	11.50	C35-60C	SLP98UH090XV36C	8267266
13ACXN042-230	TXV	43,000	14.00	12.00	C35-60C	SLP98UH090XV48C	8267267
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	SLP98UH090XV60C	8267268
13ACXN042-230	TXV	43,000	14.50	12.00	C35-60C	SLP98UH110XV60C	8267269
13ACXN042-230	TXV	42,500	14.50	11.50	C35-60D	SLO185B124/141V60	8267273
13ACXN042-230	TXV	42,500	14.50	11.50	C35-60D	SLO185UF124/141V60	8267272
13ACXN042-230	TXV	41,500	13.00	11.00	CBX25UH-042		7619779
13ACXN042-230	TXV	42,000	14.50	12.00	CBX25UHV-042		7622697
13ACXN042-230	TXV	42,000	14.00	11.50	CBX27UH-042		7617818
13ACXN042-230	TXV	42,000	14.00	11.50	CBX27UH-048		7617819
13ACXN042-230	TXV	40,500	13.00	11.00	CBX32M-036		7617820
13ACXN042-230	TXV	40,500	13.00	11.00	CBX32M-042		7617821
13ACXN042-230	TXV	41,500	13.00	11.00	CBX32M-048		7617822
13ACXN042-230	TXV	42,000	14.00	11.00	CBX32MV-048		7617932
13ACXN042-230	TXV	42,000	13.00	11.00	CBX40UHV-042		7617823
13ACXN042-230	TXV	42,000	14.00	11.00	CBX40UHV-048		7617933
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-41	EL180UH090E48B	7620403
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-41	EL180UH090E60C	7620738
13ACXN042-230	TXV	40,500	13.00	11.00	CH23-41	EL180UH110E60C	7620481
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-51	EL180UH090E48B	7620404
13ACXN042-230	TXV	41,000	14.00	11.00	CH23-51	EL180UH090E60C	7620755
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-51	EL180UH110E60C	7620482
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-51	EL296UH110XV48C	7617824
13ACXN042-230	TXV	41,500	14.00	11.50	CH23-65	EL180UH090E60C	7620739
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-65	EL195UH090XE48C	7617825
13ACXN042-230	TXV	41,500	13.00	11.00	CH23-65	EL195UH110XE60C	7617826
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-65	EL296UH090XE48C	7619206
13ACXN042-230	TXV	41,000	13.00	11.00	CH23-65	EL296UH090XV48C	7617827
13ACXN042-230	TXV	41,000	14.00	11.00	CH23-65	EL296UH090XV60C	7617915
13ACXN042-230	TXV	41,500	13.00	11.00	CH23-65	EL296UH110XE60C	7619207
13ACXN042-230	TXV	41,500	14.00	11.00	CH23-65	EL296UH110XV60C	7617916
13ACXN042-230	TXV	41,500	14.00	11.50	CH23-65	SL280UH090V60C	7617917
13ACXN042-230	TXV	41,000	14.00	11.00	CH23-65	SL280UH110V60C	7617918
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43	EL180UH090E60C	7620741
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43	EL180UH110E60C	7620483
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43	EL296UH090XV48C	7617836
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43	EL296UH090XV60C	7617837
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-43	EL296UH110XV60C	7617934
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-43	SL280UH090V60C	7617919

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43	SL280UH110V60C	7617920
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43	SLP98UH090XV48C	7617839
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-43	SLP98UH090XV60C	7617840
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43	SLP98UH110XV60C	7617841
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-43B	EL180UH090E48B	7620405
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-43B	SL280UH090V36B	7617832
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-43B	SL280UH090V48B	7617833
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43C	EL195UH090XE48C	7617835
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-43C	EL296UH090XE48C	7619208
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-43C	EL296UH110XV48C	7617838
13ACXN042-230	TXV	42,000	14.00	11.00	CH33-44/48B	EL180UH090E48B	7620255
13ACXN042-230	TXV	41,000	13.00	11.00	CH33-44/48B	EL296UH045XV36B	7617842
13ACXN042-230	TXV	41,500	13.00	11.00	CH33-44/48B	EL296UH070XV36B	7621859
13ACXN042-230	TXV	41,500	14.00	11.50	CH33-48	EL180UH090E60C	7620742
13ACXN042-230	TXV	41,500	14.00	11.50	CH33-48	EL180UH110E60C	7620484
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	EL180UH090E60C	7620744
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	EL180UH110E60C	7620485
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-49	EL195UH090XE48C	7617845
13ACXN042-230	TXV	43,000	14.00	11.50	CH33-49	EL195UH110XE60C	7617846
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-49	EL296UH090XE48C	7619209
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH090XV48C	7617847
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH090XV60C	7617848
13ACXN042-230	TXV	43,000	14.00	11.50	CH33-49	EL296UH110XE60C	7619210
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH110XV48C	7617849
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	EL296UH110XV60C	7617850
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	SL280UH090V60C	7617921
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	SLP98UH090XV48C	7617851
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-49	SLP98UH110XV60C	7617852
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL180UH090E60C	7620746
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL180UH110E60C	7620486
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL195UH090XE48C	7617854
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL195UH110XE60C	7617855
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL296UH090XE48C	7619211
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH090XV48C	7617856
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-50/60C	EL296UH090XV60C	7617857
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH110XE60C	7619212
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH110XV48C	7617858
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	EL296UH110XV60C	7617859
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	SL280UH090V60C	7617922
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	SL280UH110V60C	7617923
13ACXN042-230	TXV	42,000	14.00	11.50	CH33-50/60C	SLP98UH090XV48C	7617860
13ACXN042-230	TXV	42,500	14.00	11.50	CH33-50/60C	SLP98UH110XV60C	7617861
13ACXN042-230	TXV	40,500	13.00	11.00	CH35-36B		7623243
13ACXN042-230	TXV	41,500	14.25	12.00	CH35-36B	EL180UH090E48B	7623232
13ACXN042-230	TXV	41,500	14.25	12.00	CH35-36B	EL180UH090XE48B	7623234
13ACXN042-230	TXV	40,500	13.00	11.00	CH35-36B	EL296UH070XV36B	7623236
13ACXN042-230	TXV	41,000	14.00	11.50	CH35-36B	SL280UH090V48B	7623237
13ACXN042-230	TXV	41,000	14.00	11.50	CH35-36B	SL280UH090XV48B	7623239
13ACXN042-230	TXV	40,500	13.00	11.00	CH35-36B	SLP98UH070XV36B	7623241

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	41,000	13.00	11.00	CH35-36C		7623245
13ACXN042-230	TXV	41,500	14.25	12.00	CH35-36C	EL180UH090E60C	7623257
13ACXN042-230	TXV	41,500	14.25	12.00	CH35-36C	EL180UH110E60C	7623259
13ACXN042-230	TXV	41,500	14.25	12.00	CH35-36C	EL180UH110XE60C	7623260
13ACXN042-230	TXV	41,000	14.00	11.50	CH35-36C	EL195UH090XE48C	7623246
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	EL195UH110XE60C	7623250
13ACXN042-230	TXV	41,000	14.00	11.50	CH35-36C	EL296UH090XE48C	7623248
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	EL296UH090XV36C	7623253
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	EL296UH090XV48C	7623255
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	EL296UH110XE60C	7623252
13ACXN042-230	TXV	42,000	14.25	12.00	CH35-36C	SL280UH090V60C	7623262
13ACXN042-230	TXV	42,000	14.25	12.00	CH35-36C	SL280UH090XV60C	7623264
13ACXN042-230	TXV	41,500	14.25	11.50	CH35-36C	SL280UH110V60C	7623266
13ACXN042-230	TXV	41,500	14.25	11.50	CH35-36C	SL280UH110XV60C	7623267
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH090XV36C	7623269
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH090XV48C	7623271
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH090XV60C	7623272
13ACXN042-230	TXV	41,500	14.00	11.50	CH35-36C	SLP98UH110XV60C	7623274
13ACXN042-230	TXV	42,000	13.00	11.50	CH35-42B		7623292
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-42B	EL180UH090E48B	7623276
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-42B	EL180UH090XE48B	7623278
13ACXN042-230	TXV	42,000	14.25	12.00	CH35-42B	EL296UH070XV36B	7623279
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-42B	SL280UH090V48B	7623281
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-42B	SL280UH090XV48B	7623283
13ACXN042-230	TXV	42,000	14.25	12.00	CH35-42B	SLP98UH070XV36B	7623285
13ACXN042-230	TXV	42,000	13.00	11.50	CH35-42C		7623294
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-42C	EL180UH090E60C	7623286
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL180UH110E60C	7623288
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL180UH110XE60C	7623290
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL195UH090XE48C	7623295
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL195UH110XE60C	7623297
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH090XE48C	7623304
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH090XV36C	7623299
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-42C	EL296UH090XV48C	7623300
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-42C	EL296UH090XV60C	7623302
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH110XE60C	7623307
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	EL296UH110XV60C	7623305
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH090V60C	7623309
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH090XV60C	7623310
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH110V60C	7623312
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-42C	SL280UH110XV60C	7623313
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	SLP98UH090XV36C	7623315
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-42C	SLP98UH090XV48C	7623317
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-42C	SLP98UH090XV60C	7623318
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-42C	SLP98UH110XV60C	7623320
13ACXN042-230	TXV	42,000	13.00	11.50	CH35-48B		7623325
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48B	EL180UH090E48B	7623322
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48B	EL180UH090XE48B	7623323
13ACXN042-230	TXV	42,000	14.00	11.50	CH35-48B	EL296UH070XV36B	7623327

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48B	SL280UH090V48B	7623328
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48B	SL280UH090XV48B	7623330
13ACXN042-230	TXV	42,000	14.00	11.50	CH35-48B	SLP98UH070XV36B	7623331
13ACXN042-230	TXV	42,000	13.00	11.50	CH35-48C		7623338
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL180UH090E60C	7623333
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL180UH110E60C	7623335
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL180UH110XE60C	7623336
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL195UH090XE48C	7623340
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL195UH110XE60C	7623341
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XE48C	7623348
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XV36C	7623343
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XV48C	7623345
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH090XV60C	7623346
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH110XE60C	7623351
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	EL296UH110XV60C	7623350
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH090V60C	7623353
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH090XV60C	7623354
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH110V60C	7623356
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SL280UH110XV60C	7623358
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH090XV36C	7623359
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH090XV48C	7623361
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH090XV60C	7623363
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-48C	SLP98UH110XV60C	7623364
13ACXN042-230	TXV	42,000	13.00	11.50	CH35-51C		7623366
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-51C	EL180UH090E60C	7623381
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-51C	EL180UH110E60C	7623382
13ACXN042-230	TXV	42,000	15.00	12.50	CH35-51C	EL180UH110XE60C	7623384
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	EL195UH090XE48C	7623368
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	EL195UH110XE60C	7623369
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH090XE48C	7623376
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH090XV36C	7623371
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-51C	EL296UH090XV48C	7623372
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-51C	EL296UH090XV60C	7623374
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH110XE60C	7623379
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	EL296UH110XV60C	7623377
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH090V60C	7623386
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH090XV60C	7623387
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH110V60C	7623389
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-51C	SL280UH110XV60C	7623390
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	SLP98UH090XV36C	7623392
13ACXN042-230	TXV	42,000	14.50	12.50	CH35-51C	SLP98UH090XV48C	7623394
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	SLP98UH090XV60C	7623395
13ACXN042-230	TXV	42,000	14.50	12.20	CH35-51C	SLP98UH110XV60C	7623397
13ACXN042-230	TXV	40,500	13.00	11.00	CR33-48	EL195DF070XE48B	7617862
13ACXN042-230	TXV	41,000	13.00	11.00	CR33-48	EL195DF090XE48C	7617935
13ACXN042-230	TXV	40,500	13.00	11.00	CR33-48	EL296DF070XE48B	7619213
13ACXN042-230	TXV	40,500	13.00	11.00	CR33-48	EL296DF070XV48B	7617863
13ACXN042-230	TXV	41,000	13.00	11.00	CR33-48	EL296DF090XE48C	7619220
13ACXN042-230	TXV	41,500	13.00	11.00	CR33-48	EL296DF090XV60C	7617864

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	41,500	13.00	11.00	CR33-48	EL296DF110XV60C	7617865
13ACXN042-230	TXV	41,500	13.00	11.00	CR33-50/60		7617866
13ACXN042-230	TXV	42,000	14.00	11.50	CR33-50/60	EL180DF110E60C	7619793
13ACXN042-230	TXV	42,000	14.00	11.50	CR33-50/60	EL296DF110XV60C	7617867
13ACXN042-230	TXV	42,000	14.00	11.50	CR33-50/60	SL280DF090V60C	7617924
13ACXN042-230	TXV	42,000	14.00	11.50	CR33-50/60	SL280DF110V60C	7617925
13ACXN042-230	TXV	41,000	13.00	10.50	CR33-60		7617868
13ACXN042-230	TXV	41,500	13.00	11.00	CX34-38B	EL296UH045XV36B	7617869
13ACXN042-230	TXV	41,500	13.00	11.00	CX34-43		7617870
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH090E60C	7620747
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH110E60C	7620487
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL180UH110XE60C	7620649
13ACXN042-230	TXV	41,500	14.00	11.50	CX34-43	EL195UH090XE48C	7617871
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL195UH110XE60C	7617872
13ACXN042-230	TXV	41,500	14.00	11.50	CX34-43	EL296UH090XE48C	7619214
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH090XV48C	7617873
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH090XV60C	7617874
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH110XE60C	7619215
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH110XV48C	7617875
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	EL296UH110XV60C	7617876
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	SL280UH090V60C	7617926
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	SL280UH090XV60C	7617936
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	SL280UH110XV60C	7617927
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	SLO185B124/141V60	7622789
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	SLO185UF124/141V60	7622773
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	SLP98UH090XV48C	7617877
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43	SLP98UH110XV60C	7617878
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43B	EL180UH090E48B	7620254
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-43B	EL180UH090XE48B	7619915
13ACXN042-230	TXV	41,000	13.00	10.50	CX34-44/48		7786570
13ACXN042-230	TXV	41,500	14.00	11.50	CX34-44/48	EL180UH090E60C	7620749
13ACXN042-230	TXV	42,000	13.00	11.00	CX34-49		7617879
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL180UH090E60C	7620750
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL180UH110E60C	7620425
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL180UH110XE60C	7620651
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-49	EL195UH090XE48C	7617880
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL195UH110XE60C	7617881
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-49	EL296UH090XE48C	7619216
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH090XV48C	7617882
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-49	EL296UH090XV60C	7617883
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH110XE60C	7619217
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH110XV48C	7617884
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	EL296UH110XV60C	7617885
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH090V60C	7617928
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH090XV60C	7617930
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH110V60C	7617929
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SL280UH110XV60C	7617937
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SLO185B124/141V60	7622791
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SLO185UF124/141V60	7622775

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-49	SLP98UH090XV36C	7617886
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-49	SLP98UH090XV48C	7617887
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SLP98UH090XV60C	7617888
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-49	SLP98UH110XV60C	7617889
13ACXN042-230	TXV	41,000	13.00	10.50	CX34-50/60C		7617890
13ACXN042-230	TXV	42,000	14.00	11.50	CX34-50/60C	EL180UH090E60C	7620752
13ACXN042-230	TXV	41,500	14.00	11.50	CX34-50/60C	EL180UH110E60C	7620426
13ACXN042-230	TXV	41,500	14.00	11.50	CX34-50/60C	EL180UH110XE60C	7620652
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-60D	SLO185B124/141V60	7622794
13ACXN042-230	TXV	42,500	14.00	11.50	CX34-60D	SLO185UF124/141V60	7622778
13ACXN042-230	TXV	42,500	13.00	11.00	CX34-62C		7617891
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	EL180UH090E60C	7620754
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	EL180UH110E60C	7620427
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	EL180UH110XE60C	7620654
13ACXN042-230	TXV	43,000	14.00	12.00	CX34-62C	EL195UH090XE48C	7617892
13ACXN042-230	TXV	43,500	14.00	12.00	CX34-62C	EL195UH110XE60C	7617893
13ACXN042-230	TXV	43,000	14.00	12.00	CX34-62C	EL296UH090XE48C	7619218
13ACXN042-230	TXV	43,000	14.00	12.00	CX34-62C	EL296UH090XV48C	7617894
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	EL296UH090XV60C	7617895
13ACXN042-230	TXV	43,500	14.00	12.00	CX34-62C	EL296UH110XE60C	7619219
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	EL296UH110XV48C	7617896
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	EL296UH110XV60C	7617897
13ACXN042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH090V60C	7617898
13ACXN042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH090XV60C	7617900
13ACXN042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH110V60C	7617899
13ACXN042-230	TXV	43,500	14.50	12.00	CX34-62C	SL280UH110XV60C	7617901
13ACXN042-230	TXV	43,500	14.50	12.00	CX34-62C	SLO185B124/141V60	7622793
13ACXN042-230	TXV	43,500	14.50	12.00	CX34-62C	SLO185UF124/141V60	7622776
13ACXN042-230	TXV	43,000	14.00	11.50	CX34-62C	SLP98UH090XV36C	7617902
13ACXN042-230	TXV	43,000	14.00	12.00	CX34-62C	SLP98UH090XV48C	7617903
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	SLP98UH090XV60C	7617904
13ACXN042-230	TXV	43,000	14.50	12.00	CX34-62C	SLP98UH110XV60C	7617905
13ACXN042-230	TXV	42,500	14.50	11.50	CX34-62D	SLO185B124/141V60	7622796
13ACXN042-230	TXV	42,500	14.50	11.50	CX34-62D	SLO185UF124/141V60	7622780
13ACXN042-230	TXV	40,000	13.00	11.00	CX35-30/36B		8269586
13ACXN042-230	TXV	41,000	13.50	11.50	CX35-30/36B	EL180UH090E48B	8269587
13ACXN042-230	TXV	41,000	13.50	11.50	CX35-30/36B	EL180UH090XE48B	8269588
13ACXN042-230	TXV	40,500	13.00	11.00	CX35-30/36B	EL296UH070XV36B	8269592
13ACXN042-230	TXV	41,000	13.50	11.50	CX35-30/36B	SL280UH090V48B	8269590
13ACXN042-230	TXV	41,000	13.50	11.50	CX35-30/36B	SL280UH090XV48B	8269589
13ACXN042-230	TXV	40,500	13.00	11.00	CX35-30/36B	SLP98UH070XV36B	8269591
13ACXN042-230	TXV	40,000	13.00	11.00	CX35-30/36C		8269568
13ACXN042-230	TXV	40,500	14.00	11.50	CX35-30/36C	CBWMV-60C-100	8269576
13ACXN042-230	TXV	40,500	14.00	11.50	CX35-30/36C	CBWMV-60C-120	8269577
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	EL180UH090E60C	8269569
13ACXN042-230	TXV	40,500	14.00	11.50	CX35-30/36C	EL180UH110E60C	8269571
13ACXN042-230	TXV	40,500	14.00	11.50	CX35-30/36C	EL180UH110XE60C	8269570
13ACXN042-230	TXV	40,500	13.50	11.50	CX35-30/36C	EL296UH090XV36C	8269582
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	EL296UH090XV48C	8269583

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	41,000	13.50	11.50	CX35-30/36C	EL296UH090XV60C	8269584
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	EL296UH110XV60C	8269585
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	SL280UH090V60C	8269574
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	SL280UH090XV60C	8269572
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	SL280UH110V60C	8269575
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	SL280UH110XV60C	8269573
13ACXN042-230	TXV	40,500	13.50	11.50	CX35-30/36C	SLP98UH090XV36C	8269578
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	SLP98UH090XV48C	8269579
13ACXN042-230	TXV	41,000	13.50	11.50	CX35-30/36C	SLP98UH090XV60C	8269580
13ACXN042-230	TXV	41,000	14.00	11.50	CX35-30/36C	SLP98UH110XV60C	8269581
13ACXN042-230	TXV	41,500	13.00	11.00	CX35-30B		8269561
13ACXN042-230	TXV	42,000	14.00	12.00	CX35-30B	EL180UH090E48B	8269562
13ACXN042-230	TXV	42,000	14.00	12.00	CX35-30B	EL180UH090XE48B	8269563
13ACXN042-230	TXV	42,000	13.50	11.50	CX35-30B	EL296UH070XV36B	8269567
13ACXN042-230	TXV	42,500	14.00	12.00	CX35-30B	SL280UH090V48B	8269565
13ACXN042-230	TXV	42,500	14.00	12.00	CX35-30B	SL280UH090XV48B	8269564
13ACXN042-230	TXV	42,000	13.50	11.50	CX35-30B	SLP98UH070XV36B	8269566
13ACXN042-230	TXV	41,500	13.00	11.00	CX35-36B	EL296UH045XV36B	8266740
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48B	EL180UH090E48B	8266758
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48B	EL180UH090XE48B	8266756
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-48B	EL296UH070XV36B	8269625
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-48B	SL280UH090V48B	8269623
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-48B	SL280UH090XV48B	8269622
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-48B	SLP98UH070XV36B	8269624
13ACXN042-230	TXV	41,500	13.00	11.00	CX35-48C		8266778
13ACXN042-230	TXV	42,500	14.50	12.35	CX35-48C	CBWMV-60C-100	8269594
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-48C	CBWMV-60C-120	8269595
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL180UH090E60C	8266786
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL180UH110E60C	8266784
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL180UH110XE60C	8266785
13ACXN042-230	TXV	41,500	14.00	11.50	CX35-48C	EL195UH090XE48C	8266804
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL195UH110XE60C	8266805
13ACXN042-230	TXV	41,500	14.00	11.50	CX35-48C	EL296UH090XE48C	8266802
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-48C	EL296UH090XV36C	8269598
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL296UH090XV48C	8266806
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL296UH090XV60C	8266807
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL296UH110XE60C	8266803
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL296UH110XV48C	8266808
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	EL296UH110XV60C	8266809
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	SL280UH090V60C	8266812
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	SL280UH090XV60C	8266814
13ACXN042-230	TXV	43,500	14.50	12.50	CX35-48C	SL280UH110V60C	8269593
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	SL280UH110XV60C	8266813
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	SLO185B124/141V60	8266781
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	SLO185UF124/141V60	8266780
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-48C	SLP98UH090XV36C	8269597
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	SLP98UH090XV48C	8266810
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-48C	SLP98UH090XV60C	8269596
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-48C	SLP98UH110XV60C	8266811

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,000	13.00	11.00	CX35-49C		8266820
13ACXN042-230	TXV	43,000	14.50	12.50	CX35-49C	CBWMV-60C-100	8269599
13ACXN042-230	TXV	43,500	14.50	12.50	CX35-49C	CBWMV-60C-120	8269600
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL180UH090E60C	8266827
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL180UH110E60C	8266823
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL180UH110XE60C	8266825
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-49C	EL195UH090XE48C	8266837
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL195UH110XE60C	8266838
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-49C	EL296UH090XE48C	8266834
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-49C	EL296UH090XV36C	8269601
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL296UH090XV48C	8266839
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-49C	EL296UH090XV60C	8266840
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL296UH110XE60C	8266835
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL296UH110XV48C	8266841
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	EL296UH110XV60C	8266842
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SL280UH090V60C	8266847
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SL280UH090XV60C	8266849
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SL280UH110V60C	8266848
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SL280UH110XV60C	8266850
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SLO185B124/141V60	8266822
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SLO185UF124/141V60	8266821
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-49C	SLP98UH090XV36C	8266843
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-49C	SLP98UH090XV48C	8266844
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SLP98UH090XV60C	8266845
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-49C	SLP98UH110XV60C	8266846
13ACXN042-230	TXV	41,000	13.00	10.50	CX35-50/60C		8266853
13ACXN042-230	TXV	42,500	14.50	12.00	CX35-50/60C	CBWMV-60C-100	8269612
13ACXN042-230	TXV	42,500	14.50	12.00	CX35-50/60C	CBWMV-60C-120	8269613
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-50/60C	EL180UH090E60C	8266856
13ACXN042-230	TXV	41,500	14.00	11.50	CX35-50/60C	EL180UH110E60C	8266854
13ACXN042-230	TXV	41,500	14.00	11.50	CX35-50/60C	EL180UH110XE60C	8266855
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-50/60C	EL195UH090XE48C	8269606
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-50/60C	EL195UH110XE60C	8269607
13ACXN042-230	TXV	42,000	14.00	11.50	CX35-50/60C	EL296UH090XE48C	8269605
13ACXN042-230	TXV	42,500	14.00	12.00	CX35-50/60C	EL296UH090XV36C	8269620
13ACXN042-230	TXV	42,500	14.50	12.00	CX35-50/60C	EL296UH090XV48C	8269621
13ACXN042-230	TXV	43,000	14.00	12.00	CX35-50/60C	EL296UH090XV60C	8269619
13ACXN042-230	TXV	42,500	14.00	11.50	CX35-50/60C	EL296UH110XE60C	8269604
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-50/60C	EL296UH110XV60C	8269618
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-50/60C	SL280UH090V60C	8269611
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-50/60C	SL280UH090XV60C	8269608
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-50/60C	SL280UH110V60C	8269610
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-50/60C	SL280UH110XV60C	8269609
13ACXN042-230	TXV	42,500	14.50	12.00	CX35-50/60C	SLO185B124/141V60	8269602
13ACXN042-230	TXV	42,500	14.50	12.00	CX35-50/60C	SLO185UF124/141V60	8269603
13ACXN042-230	TXV	42,500	14.00	12.00	CX35-50/60C	SLP98UH090XV36C	8269614
13ACXN042-230	TXV	42,500	14.50	12.00	CX35-50/60C	SLP98UH090XV48C	8269615
13ACXN042-230	TXV	43,000	14.00	12.00	CX35-50/60C	SLP98UH090XV60C	8269616
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-50/60C	SLP98UH110XV60C	8269617

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN042-230	TXV	42,500	13.00	11.00	CX35-60C		8266875
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	EL180UH090E60C	8266898
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	EL180UH110E60C	8266896
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	EL180UH110XE60C	8266897
13ACXN042-230	TXV	43,000	14.00	12.00	CX35-60C	EL195UH090XE48C	8266901
13ACXN042-230	TXV	43,500	14.00	12.00	CX35-60C	EL195UH110XE60C	8266902
13ACXN042-230	TXV	43,000	14.00	12.00	CX35-60C	EL296UH090XE48C	8266899
13ACXN042-230	TXV	43,000	14.00	12.00	CX35-60C	EL296UH090XV48C	8266903
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	EL296UH090XV60C	8266904
13ACXN042-230	TXV	43,500	14.00	12.00	CX35-60C	EL296UH110XE60C	8266900
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	EL296UH110XV48C	8266905
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	EL296UH110XV60C	8266906
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-60C	SL280UH090V60C	8266907
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-60C	SL280UH090XV60C	8266909
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-60C	SL280UH110V60C	8266908
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-60C	SL280UH110XV60C	8266910
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-60C	SLO185B124/141V60	8266877
13ACXN042-230	TXV	43,500	14.50	12.00	CX35-60C	SLO185UF124/141V60	8266876
13ACXN042-230	TXV	43,000	14.00	11.50	CX35-60C	SLP98UH090XV36C	8266911
13ACXN042-230	TXV	43,000	14.00	12.00	CX35-60C	SLP98UH090XV48C	8266912
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	SLP98UH090XV60C	8266913
13ACXN042-230	TXV	43,000	14.50	12.00	CX35-60C	SLP98UH110XV60C	8266914
13ACXN042-230	TXV	42,500	14.50	11.50	CX35-60D	SLO185B124/141V60	8266918
13ACXN042-230	TXV	42,500	14.50	11.50	CX35-60D	SLO185UF124/141V60	8266917
13ACXN048-230	RFC	48,500	13.00	11.00	C33-43		7618880
13ACXN048-230	RFC	49,000	13.00	11.00	C33-49		7618881
13ACXN048-230	RFC	50,000	13.00	11.00	C33-62C		7618875
13ACXN048-230	RFC	49,000	13.00	11.00	C33-62D		7618895
13ACXN048-230	RFC	49,000	13.00	11.00	CH23-68		7618912
13ACXN048-230	RFC	48,500	13.00	11.00	CH33-43		7618954
13ACXN048-230	RFC	49,000	13.00	11.00	CH33-49		7618955
13ACXN048-230	RFC	49,000	13.00	11.00	CH33-50/60C		7618914
13ACXN048-230	RFC	48,500	13.00	11.00	CH33-60D		7618941
13ACXN048-230	RFC	49,000	13.00	11.00	CH33-62D		7618942
13ACXN048-230	TXV	48,000	13.00	11.00	C33-38B	EL180UH090E48B	7620600
13ACXN048-230	TXV	48,000	13.00	11.00	C33-38B	EL180UH090XE48B	7620070
13ACXN048-230	TXV	48,000	13.00	11.00	C33-38B	SL280UH090V48B	7786571
13ACXN048-230	TXV	48,000	13.00	11.00	C33-38B	SL280UH090XV48B	7618879
13ACXN048-230	TXV	48,500	13.00	11.00	C33-43		7618939
13ACXN048-230	TXV	49,000	13.00	11.00	C33-49		7618940
13ACXN048-230	TXV	49,000	14.00	11.70	C33-49	EL180UH090E60C	7620782
13ACXN048-230	TXV	49,000	14.00	11.70	C33-49	EL180UH110E60C	7620434
13ACXN048-230	TXV	49,000	14.00	11.70	C33-49	EL180UH110XE60C	7620666
13ACXN048-230	TXV	49,000	14.00	11.70	C33-49	EL195UH110XE60C	7618882
13ACXN048-230	TXV	49,000	14.00	11.70	C33-49	EL296UH110XE60C	7619342
13ACXN048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH090V60C	7618869
13ACXN048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH090XV60C	7618867
13ACXN048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH110V60C	7618870
13ACXN048-230	TXV	49,500	14.00	11.70	C33-49	SL280UH110XV60C	7618868

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN048-230	TXV	47,500	13.00	11.00	C33-50/60C		7618871
13ACXN048-230	TXV	49,000	13.00	11.00	C33-60D		7618872
13ACXN048-230	TXV	49,000	13.00	11.00	C33-60D		7618956
13ACXN048-230	TXV	49,500	14.00	11.70	C33-60D	EL180UH135E60D	7620833
13ACXN048-230	TXV	49,000	14.00	11.70	C33-60D	SL280UH135V60D	7618873
13ACXN048-230	TXV	49,000	14.00	11.70	C33-60D	SLP98UH135XV60D	7618874
13ACXN048-230	TXV	50,000	13.00	11.00	C33-62C		7618948
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL180UH090E60C	7620784
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL180UH110E60C	7620435
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL180UH110XE60C	7620667
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL195UH090XE48C	7618876
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL195UH110XE60C	7618877
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH090XE48C	7619340
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH090XV48C	7618878
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH090XV60C	7618883
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH110XE60C	7619341
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH110XV48C	7618884
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	EL296UH110XV60C	7618887
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH090V60C	7618890
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH090XV60C	7618888
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH110V60C	7618891
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	SL280UH110XV60C	7618889
13ACXN048-230	TXV	49,500	14.00	11.70	C33-62C	SLP98UH090XV48C	7618892
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	SLP98UH090XV60C	7618893
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62C	SLP98UH110XV60C	7618894
13ACXN048-230	TXV	49,000	13.00	11.00	C33-62D		7618949
13ACXN048-230	TXV	49,500	14.00	11.70	C33-62D	EL180UH135E60D	7620845
13ACXN048-230	TXV	50,000	14.00	11.70	C33-62D	EL296UH135XV60D	7618896
13ACXN048-230	TXV	49,500	14.00	11.70	C33-62D	SL280UH135V60D	7618897
13ACXN048-230	TXV	49,000	14.00	11.70	C33-62D	SLP98UH135XV60D	7618898
13ACXN048-230	TXV	48,000	13.00	11.00	C35-36B	EL180UH090E48B	8267061
13ACXN048-230	TXV	48,000	13.00	11.00	C35-36B	EL180UH090XE48B	8267065
13ACXN048-230	TXV	48,000	13.00	11.00	C35-36B	SL280UH090V48B	8267098
13ACXN048-230	TXV	48,000	13.00	11.00	C35-36B	SL280UH090XV48B	8267078
13ACXN048-230	TXV	48,500	13.00	11.00	C35-48B		8267101
13ACXN048-230	TXV	48,500	13.00	11.00	C35-48C		8269626
13ACXN048-230	TXV	49,000	13.00	11.00	C35-49C		8267171
13ACXN048-230	TXV	49,000	14.00	11.70	C35-49C	EL180UH090E60C	8267179
13ACXN048-230	TXV	49,000	14.00	11.70	C35-49C	EL180UH110E60C	8267174
13ACXN048-230	TXV	49,000	14.00	11.70	C35-49C	EL180UH110XE60C	8267177
13ACXN048-230	TXV	49,000	14.00	11.70	C35-49C	EL195UH110XE60C	8267182
13ACXN048-230	TXV	49,000	14.00	11.70	C35-49C	EL296UH110XE60C	8267185
13ACXN048-230	TXV	49,500	14.00	11.70	C35-49C	SL280UH090V60C	8267180
13ACXN048-230	TXV	49,500	14.00	11.70	C35-49C	SL280UH090XV60C	8267200
13ACXN048-230	TXV	49,500	14.00	11.70	C35-49C	SL280UH110V60C	8267181
13ACXN048-230	TXV	49,500	14.00	11.70	C35-49C	SL280UH110XV60C	8267201
13ACXN048-230	TXV	47,500	13.00	11.00	C35-50/60C		8267204
13ACXN048-230	TXV	50,000	13.00	11.00	C35-60C		8267230
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL180UH090E60C	8267238

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL180UH110E60C	8267233
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL180UH110XE60C	8267236
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL195UH090XE48C	8267239
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL195UH110XE60C	8267240
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL296UH090XE48C	8267254
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL296UH090XV48C	8267241
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL296UH090XV60C	8267242
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL296UH110XE60C	8267255
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL296UH110XV48C	8267243
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	EL296UH110XV60C	8267244
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	SL280UH090V60C	8267247
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	SL280UH090XV60C	8267245
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	SL280UH110V60C	8267248
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	SL280UH110XV60C	8267246
13ACXN048-230	TXV	49,500	14.00	11.70	C35-60C	SLP98UH090XV48C	8267249
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	SLP98UH090XV60C	8267250
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60C	SLP98UH110XV60C	8267251
13ACXN048-230	TXV	49,000	13.00	11.00	C35-60D		8267271
13ACXN048-230	TXV	49,500	14.00	11.70	C35-60D	EL180UH135E60D	8267274
13ACXN048-230	TXV	50,000	14.00	11.70	C35-60D	EL296UH135XV60D	8267275
13ACXN048-230	TXV	49,500	14.00	11.70	C35-60D	SL280UH135V60D	8267276
13ACXN048-230	TXV	49,000	14.00	11.70	C35-60D	SLP98UH135XV60D	8267277
13ACXN048-230	TXV	49,500	13.00	11.00	CBX25UH-048		7619780
13ACXN048-230	TXV	48,000	14.00	12.20	CBX25UHV-048		7622699
13ACXN048-230	TXV	49,500	13.00	11.00	CBX27UH-048		7618899
13ACXN048-230	TXV	49,500	13.00	11.00	CBX27UH-060		7618900
13ACXN048-230	TXV	49,000	13.00	11.00	CBX32M-048		7618901
13ACXN048-230	TXV	49,500	13.00	11.00	CBX32M-060		7618902
13ACXN048-230	TXV	49,000	13.00	11.00	CBX32MV-048		7618903
13ACXN048-230	TXV	49,500	13.00	11.00	CBX32MV-060		7618904
13ACXN048-230	TXV	49,000	13.00	11.00	CBX40UHV-048		7618905
13ACXN048-230	TXV	49,500	13.00	11.00	CBX40UHV-060		7618906
13ACXN048-230	TXV	47,000	13.00	11.00	CH23-51	EL180UH090E60C	7620785
13ACXN048-230	TXV	47,000	13.00	11.00	CH23-51	EL180UH110E60C	7620436
13ACXN048-230	TXV	47,000	13.00	11.00	CH23-51	EL296UH110XV48C	7618907
13ACXN048-230	TXV	48,000	13.00	11.00	CH23-65	EL180UH090E60C	7620787
13ACXN048-230	TXV	48,000	13.00	11.00	CH23-65	EL180UH110E60C	7620437
13ACXN048-230	TXV	47,500	13.00	11.00	CH23-65	EL296UH110XV48C	7618908
13ACXN048-230	TXV	49,000	13.00	11.00	CH23-68		7618950
13ACXN048-230	TXV	50,000	14.00	11.70	CH23-68	EL180UH135E60D	7620847
13ACXN048-230	TXV	48,500	13.00	11.00	CH33-43		7618951
13ACXN048-230	TXV	48,000	13.00	11.00	CH33-44/48B	EL180UH090E48B	7620602
13ACXN048-230	TXV	48,000	13.00	11.00	CH33-48C		7618913
13ACXN048-230	TXV	49,000	13.00	11.00	CH33-49		7618952
13ACXN048-230	TXV	49,000	14.00	11.70	CH33-49	EL180UH090E60C	7620789
13ACXN048-230	TXV	49,000	14.00	11.70	CH33-49	EL180UH110E60C	7620438
13ACXN048-230	TXV	49,000	14.00	11.70	CH33-49	EL180UH110XE60C	7620669
13ACXN048-230	TXV	49,000	13.00	11.00	CH33-50/60C		7618953
13ACXN048-230	TXV	48,500	13.00	11.00	CH33-60D		7618885

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN048-230	TXV	49,000	13.00	11.00	CH33-62D		7618886
13ACXN048-230	TXV	49,500	14.00	11.70	CH33-62D	EL180UH135E60D	7620834
13ACXN048-230	TXV	49,000	14.00	11.70	CH33-62D	SL280UH135V60D	7618943
13ACXN048-230	TXV	48,500	14.00	11.70	CH33-62D	SLP98UH135XV60D	7618944
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-42B		7623399
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-42C		7623400
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	EL195UH090XE48C	7623402
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-42C	EL195UH110XE60C	7623404
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH090XV48C	7623407
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH090XV60C	7623405
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH110XV48C	7623409
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	EL296UH110XV60C	7623410
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-42C	SL280UH090V60C	7623415
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-42C	SL280UH110V60C	7623417
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	SLP98UH090XV48C	7623419
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	SLP98UH090XV60C	7623420
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-42C	SLP98UH110XV60C	7623422
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-48B		7623502
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-48B	EL180UH090E48B	7623423
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-48B	EL180UH090E60C	7623504
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-48B	EL180UH110E60C	7623506
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-48C		7623425
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-48C	EL180UH090E60C	7623412
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-48C	EL180UH110E60C	7623414
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-48C	EL180UH110XE60C	7623432
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-48C	EL195UH090XE48C	7623427
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-48C	EL195UH110XE60C	7623428
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-48C	EL296UH090XV48C	7623430
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-48C	SL280UH090V60C	7623433
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-48C	SL280UH090XV60C	7623435
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-48C	SL280UH110V60C	7623437
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-48C	SL280UH110XV60C	7623438
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-48C	SLP98UH090XV48C	7623440
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-48C	SLP98UH090XV60C	7623441
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-48C	SLP98UH110XV60C	7623443
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-51C		7623445
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	EL180UH090E60C	7623456
13ACXN048-230	TXV	48,000	14.00	12.00	CH35-51C	EL180UH110E60C	7623458
13ACXN048-230	TXV	48,000	14.00	12.00	CH35-51C	EL180UH110XE60C	7623460
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	EL195UH090XE48C	7623446
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	EL195UH110XE60C	7623448
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-51C	EL296UH090XV48C	7623451
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-51C	EL296UH090XV60C	7623450
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	EL296UH110XV48C	7623455
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-51C	EL296UH110XV60C	7623453
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH090V60C	7623461
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH090XV60C	7623463
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH110V60C	7623464
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-51C	SL280UH110XV60C	7623466

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-51C	SLP98UH090XV48C	7623468
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-51C	SLP98UH090XV60C	7623469
13ACXN048-230	TXV	48,000	13.00	11.50	CH35-51C	SLP98UH110XV60C	7623471
13ACXN048-230	TXV	48,000	13.00	11.00	CH35-60D		7623473
13ACXN048-230	TXV	48,000	14.00	11.70	CH35-60D	EL180UH135E60D	7623478
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-60D	EL195UH135XE60D	7623474
13ACXN048-230	TXV	48,000	13.00	11.70	CH35-60D	EL296UH135XV60D	7623476
13ACXN048-230	TXV	48,000	14.00	11.70	CH35-60D	SL280UH135V60D	7623479
13ACXN048-230	TXV	48,000	14.00	11.70	CH35-60D	SLP98UH135XV60D	7623481
13ACXN048-230	TXV	48,000	13.00	11.00	CR33-50/60		7618945
13ACXN048-230	TXV	48,000	13.00	11.00	CR33-60		7618946
13ACXN048-230	TXV	48,500	13.00	11.00	CX34-43		7618909
13ACXN048-230	TXV	49,000	13.00	11.00	CX34-49		7618910
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-49	EL180UH090E60C	7620792
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-49	EL180UH110E60C	7620439
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-49	EL180UH110XE60C	7620670
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-49	EL195UH110XE60C	7618947
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-49	EL296UH110XE60C	7619345
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH090V60C	7618917
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH090XV60C	7618915
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH110V60C	7618918
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-49	SL280UH110XV60C	7618916
13ACXN048-230	TXV	47,500	13.00	11.00	CX34-50/60C		7618919
13ACXN048-230	TXV	49,000	13.00	11.00	CX34-60D		7618920
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-60D	EL180UH135E60D	7620849
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-60D	SL280UH135V60D	7618921
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-60D	SLP98UH135XV60D	7618922
13ACXN048-230	TXV	50,000	13.00	11.00	CX34-62C		7618911
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL180UH090E60C	7620790
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL180UH110E60C	7620440
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL180UH110XE60C	7620672
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL195UH090XE48C	7618923
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL195UH110XE60C	7618924
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH090XE48C	7619343
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH090XV48C	7618925
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH090XV60C	7618926
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH110XE60C	7619344
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH110XV48C	7618927
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	EL296UH110XV60C	7618928
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH090V60C	7618931
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH090XV60C	7618929
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH110V60C	7618932
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	SL280UH110XV60C	7618930
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-62C	SLP98UH090XV48C	7618933
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	SLP98UH090XV60C	7618934
13ACXN048-230	TXV	50,000	14.00	11.70	CX34-62C	SLP98UH110XV60C	7618935
13ACXN048-230	TXV	49,000	13.00	11.00	CX34-62D		7618936
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-62D	EL180UH135E60D	7620850
13ACXN048-230	TXV	49,500	14.00	11.70	CX34-62D	SL280UH135V60D	7618937

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN048-230	TXV	49,000	14.00	11.70	CX34-62D	SLP98UH135XV60D	7618938
13ACXN048-230	TXV	48,500	13.00	11.00	CX35-48B		8269627
13ACXN048-230	TXV	48,500	13.00	11.00	CX35-48C		8266777
13ACXN048-230	TXV	49,000	13.00	11.00	CX35-49C		8266819
13ACXN048-230	TXV	49,000	14.00	11.70	CX35-49C	EL180UH090E60C	8266828
13ACXN048-230	TXV	49,000	14.00	11.70	CX35-49C	EL180UH110E60C	8266824
13ACXN048-230	TXV	49,000	14.00	11.70	CX35-49C	EL180UH110XE60C	8266826
13ACXN048-230	TXV	49,000	14.00	11.70	CX35-49C	EL195UH110XE60C	8266833
13ACXN048-230	TXV	49,000	14.00	11.70	CX35-49C	EL296UH110XE60C	8266836
13ACXN048-230	TXV	49,500	14.00	11.70	CX35-49C	SL280UH090V60C	8266831
13ACXN048-230	TXV	49,500	14.00	11.70	CX35-49C	SL280UH090XV60C	8266829
13ACXN048-230	TXV	49,500	14.00	11.70	CX35-49C	SL280UH110V60C	8266832
13ACXN048-230	TXV	49,500	14.00	11.70	CX35-49C	SL280UH110XV60C	8266830
13ACXN048-230	TXV	47,500	13.00	11.00	CX35-50/60C		8266852
13ACXN048-230	TXV	50,000	13.00	11.00	CX35-60C		8266874
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL180UH090E60C	8266880
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL180UH110E60C	8266878
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL180UH110XE60C	8266879
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL195UH090XE48C	8266881
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL195UH110XE60C	8266882
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL296UH090XE48C	8266894
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL296UH090XV48C	8266883
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL296UH090XV60C	8266884
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL296UH110XE60C	8266895
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL296UH110XV48C	8266885
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	EL296UH110XV60C	8266886
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	SL280UH090V60C	8266889
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	SL280UH090XV60C	8266887
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	SL280UH110V60C	8266890
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	SL280UH110XV60C	8266888
13ACXN048-230	TXV	49,500	14.00	11.70	CX35-60C	SLP98UH090XV48C	8266891
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	SLP98UH090XV60C	8266892
13ACXN048-230	TXV	50,000	14.00	11.70	CX35-60C	SLP98UH110XV60C	8266893
13ACXN048-230	TXV	49,000	13.00	11.00	CX35-60D		8266916
13ACXN048-230	TXV	49,500	14.00	11.70	CX35-60D	EL180UH135E60D	8266919
13ACXN048-230	TXV	49,500	14.00	11.70	CX35-60D	SL280UH135V60D	8266920
13ACXN048-230	TXV	49,000	14.00	11.70	CX35-60D	SLP98UH135XV60D	8266921
13ACXN060-230	RFC	57,500	13.00	11.00	C33-49		7618970
13ACXN060-230	RFC	57,500	13.00	11.00	C33-60D		7618971
13ACXN060-230	RFC	59,000	13.00	11.00	C33-62C		7618972
13ACXN060-230	RFC	58,000	13.00	11.00	C33-62D		7618973
13ACXN060-230	TXV	57,500	13.00	11.00	C33-49		7618962
13ACXN060-230	TXV	57,500	13.00	11.00	C33-60D		7618963
13ACXN060-230	TXV	59,000	13.00	11.00	C33-62C		7618964
13ACXN060-230	TXV	58,000	13.00	11.00	C33-62D		7618965
13ACXN060-230	TXV	57,500	13.00	11.00	C35-49C		8267170
13ACXN060-230	TXV	59,000	13.00	11.00	C35-60C		8267229
13ACXN060-230	TXV	58,000	13.00	11.00	C35-60D		8267270
13ACXN060-230	TXV	58,500	13.00	11.00	CBX25UH-060		7619781

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH REGION

NOTE - For the latest up-to-date system matches please visit the AHRI web site at http://www.ahridirectory.org

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
13ACXN060-230	TXV	58,500	13.50	11.50	CBX25UHV-060		7622701
13ACXN060-230	TXV	57,500	13.00	11.00	CBX27UH-060		7618974
13ACXN060-230	TXV	56,000	13.00	11.00	CBX32M-048		7618975
13ACXN060-230	TXV	57,000	13.00	11.00	CBX32M-060		7618976
13ACXN060-230	TXV	57,000	13.00	11.00	CBX32MV-048		7618977
13ACXN060-230	TXV	57,500	13.00	11.00	CBX32MV-060		7618978
13ACXN060-230	TXV	57,000	13.00	11.00	CBX32MV-068		7618979
13ACXN060-230	TXV	57,000	13.00	11.00	CBX40UHV-048		7618980
13ACXN060-230	TXV	57,500	13.00	11.00	CBX40UHV-060		7618957
13ACXN060-230	TXV	58,000	13.00	11.00	CH23-68		7618966
13ACXN060-230	TXV	58,000	13.00	11.00	CH23-68		7618982
13ACXN060-230	TXV	57,500	13.00	11.00	CH33-50/60C		7618958
13ACXN060-230	TXV	57,500	13.00	11.00	CH33-50/60C		7618967
13ACXN060-230	TXV	57,000	13.00	11.00	CH33-60D		7618968
13ACXN060-230	TXV	57,000	13.00	11.00	CH33-60D		7618983
13ACXN060-230	TXV	57,000	13.00	11.00	CH33-62D		7618969
13ACXN060-230	TXV	57,000	13.00	11.00	CH33-62D		7618984
13ACXN060-230	TXV	57,000	13.00	11.00	CH33-62D		7618985
13ACXN060-230	TXV	58,000	13.00	11.00	CH35-51C		7623483
13ACXN060-230	TXV	57,500	13.00	11.00	CH35-60D		7623484
13ACXN060-230	TXV	56,000	13.00	11.00	CR33-60D		7618986
13ACXN060-230	TXV	57,500	13.00	11.00	CX34-49		7618981
13ACXN060-230	TXV	57,500	13.00	11.00	CX34-60D		7618959
13ACXN060-230	TXV	59,000	13.00	11.00	CX34-62C		7618960
13ACXN060-230	TXV	58,000	13.00	11.00	CX34-62D		7618961
13ACXN060-230	TXV	57,500	13.00	11.00	CX35-49C		8266818
13ACXN060-230	TXV	59,000	13.00	11.00	CX35-60C		8266873
13ACXN060-230	TXV	58,000	13.00	11.00	CX35-60D		8266915

NOTES:
TXV = Matched with Thermostatic Expansion Valve.
RFC = Matched with RFC metering device.

AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air.
All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

REVISIONS

Sections	Description of Change
AHRI System Matches	Updated

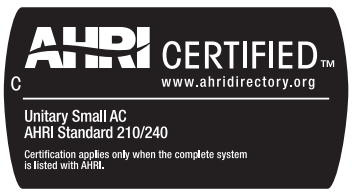

Visit us at www.lennox.com

For the latest technical information, www.lennoxdavenet.com

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.
Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.
Installation and service must be performed by a qualified installer and servicing agency.

©2015 Lennox Industries, Inc.